SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1892, by Munn & Co.

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES

Vol. LXVI.—No. 7. ESTABLISHED 1845. | NEW YORK, FEBRUARY 13, 1892. | $3.00 A YEAR WEEKLY.

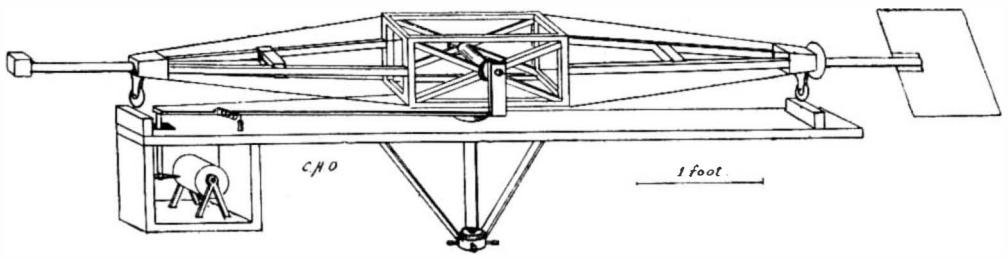

Component Pressure Recorder

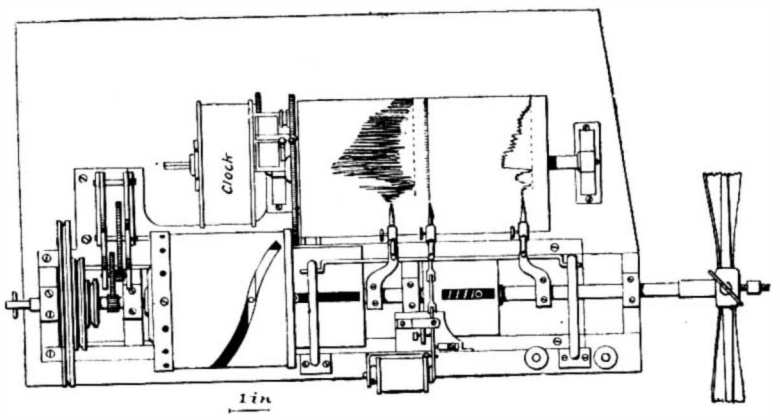

Dynamometer Chronograph



Plan of Whirling Table.

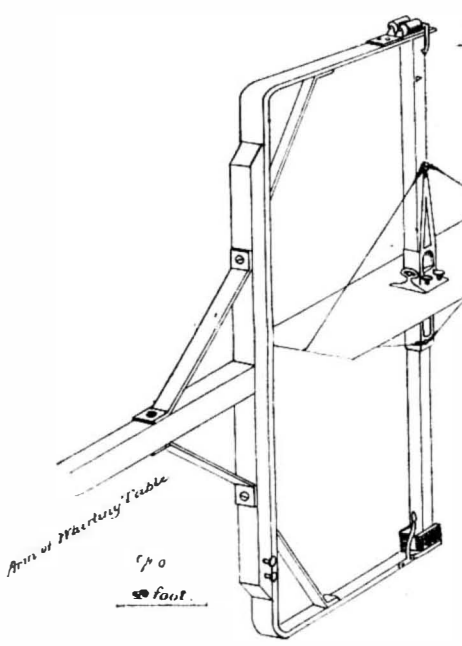

Plane Dropper

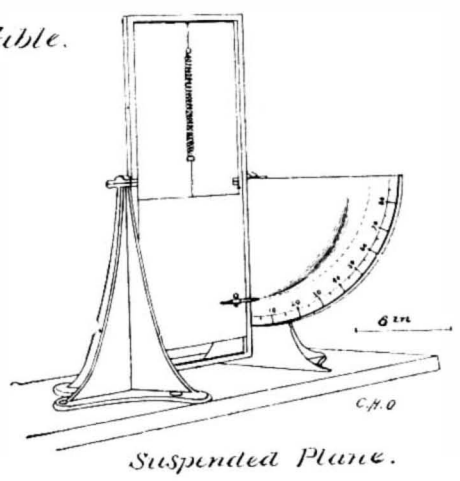

Suspended Plane.

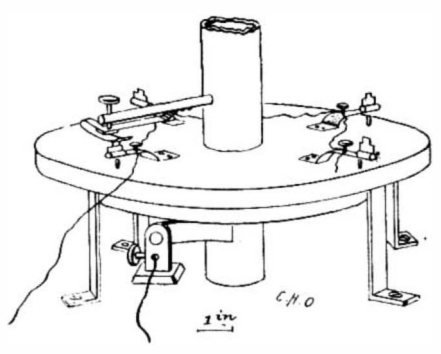

Quadrant Contacts of Whirling Table.

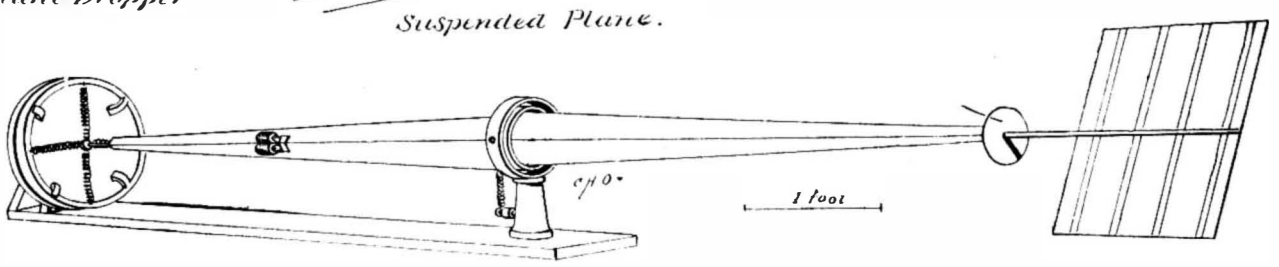

Resultant Pressure Recorder.

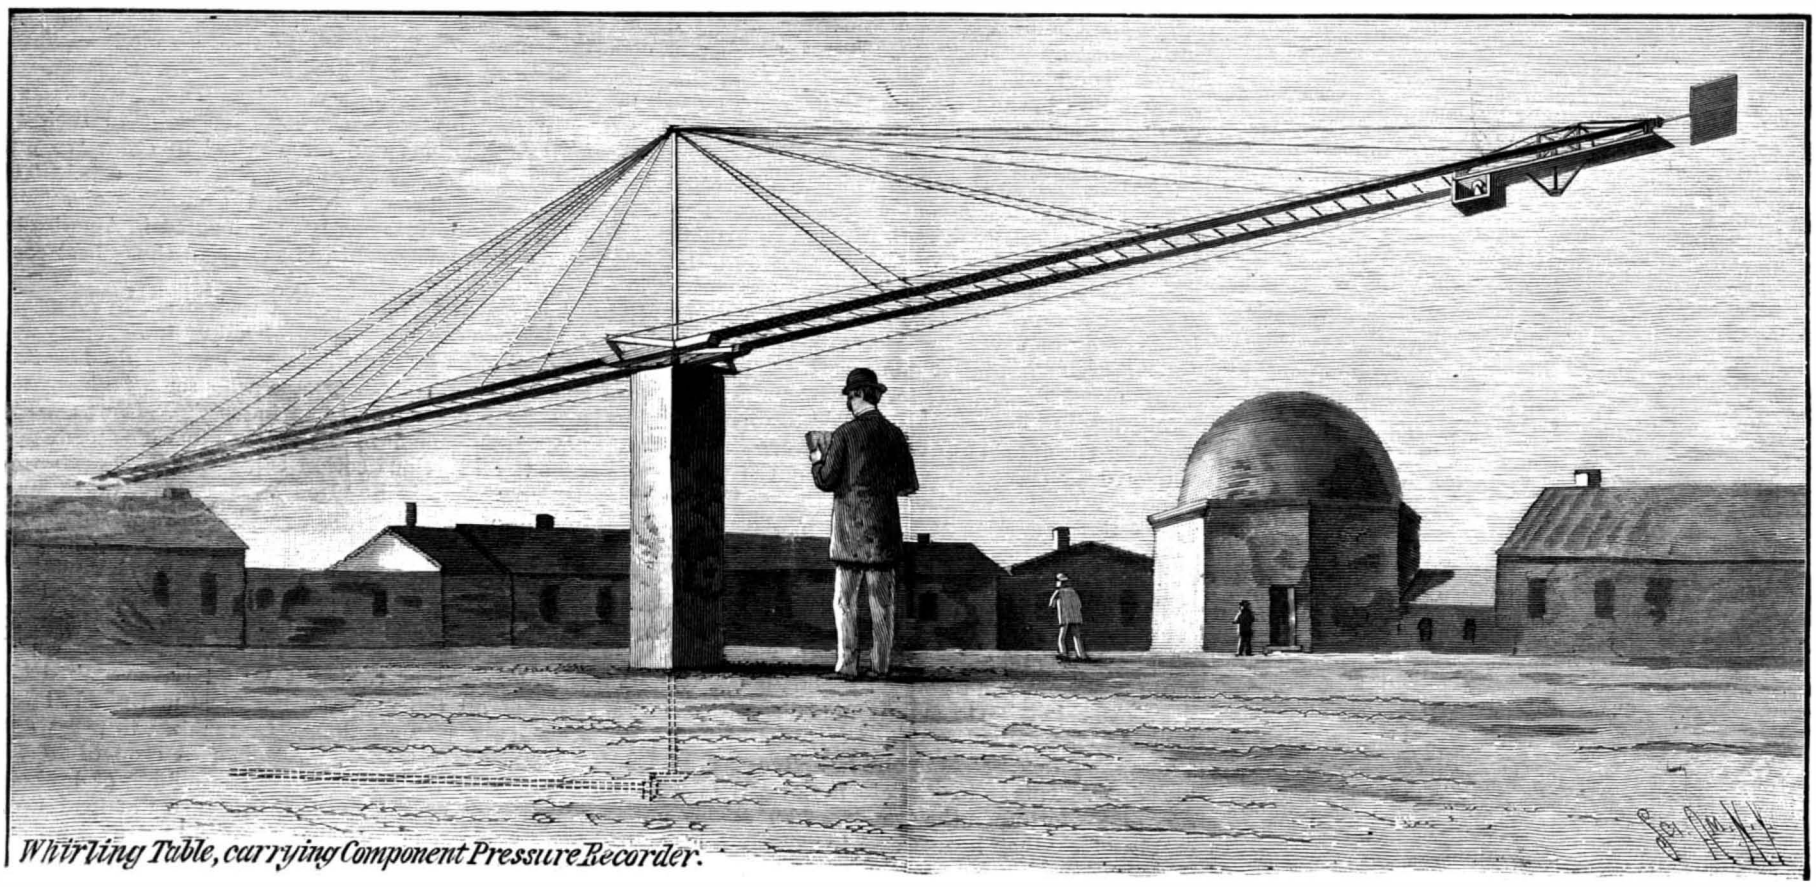

Whirling Table, carrying Component Pressure Recorder.

DR. S. P. LANGLEY'S EXPERIMENTS IN AERODYNAMICS.—[See page 101.]

© 1892 SCIENTIFIC AMERICAN, INC.

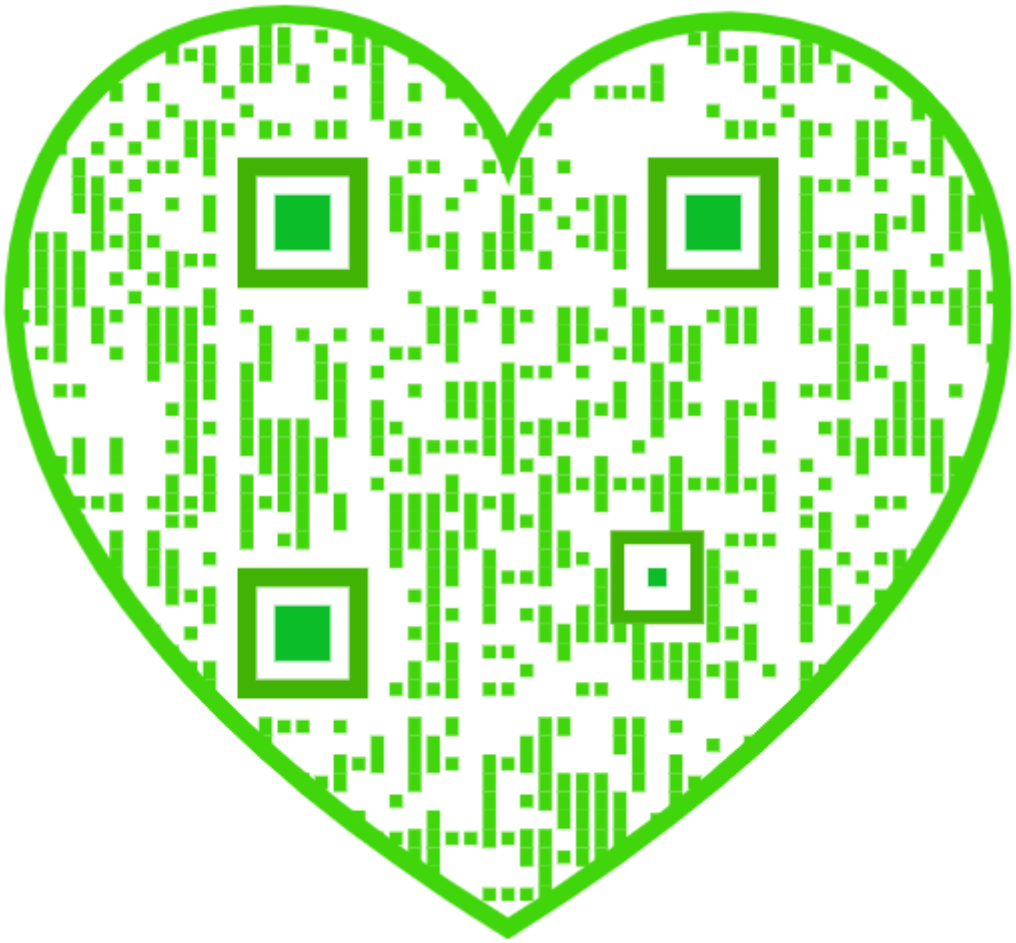

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....$3 00
One copy, six months, for the U. S., Canada or Mexico..... 1 50
One copy, one year, to any foreign country belonging to Postal Union. 4 00
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for the U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union, *nine dollars a year*.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, $5.00 a year; combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign countries, $11.50 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

☞ Readers are specially requested to notify the publishers in case of any failure delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, FEBRUARY 13, 1892.

Contents.

(Illustrated articles are marked with an asterisk.)

Aerodynamics, experiments in*.. 95
Agricultural inventions, some patented..... 106
Alloys, allotropism in..... 104
Aviator, Trouve's*..... 105
Beet sugar in Canada..... 99
Boats electrically propelled*..... 98
Books and publications, new..... 106
Buoy, a wreck-indicating..... 99
California sequoia groves, the*.. 103
Chimneys, areas for..... 102
Clothes line pulley, Leuzinger's* 99
Columbian tower, the proposed.. 98
Cultivator, Waggoner's*..... 99
Drawing, the art of..... 105
Earth, the, fluid inside..... 97
Electric maritime navigation, Trouve's system of*..... 98
Electrical science, progress of... 100
Electrical transmission of power —the Frankfort plant*..... 102
Electricity in paper..... 98
Engineering inventions, interesting recent..... 106
Engineering, naval, progress in.. 104
Ensilage harvester and chopper, Conroy's*..... 99
Ferns..... 100
Flying machine problem, the*... 101
Flying machine, Trouve's*..... 105
Freckles..... 100
Glass, coloring for..... 104
Hops..... 100
Hydraulic mining, trial of nozzles for..... 105
Influenza, Dr. Crerar's cure for.. 97
Inventions, recently patented... 106
Inventors receiving patents..... 107
Irrigation in Montana..... 98
Langley's, Prof., aerodynamics*. 95
Lantern slides, traced..... 99
Locomotive, the first in America. 104
Manufactures based on patents. 96
Measuring pot, Stanton's*..... 99
Patents granted, weekly record of..... 107
Patents, report of commissioner of..... 96
Planets, two conspicuous..... 104
Railway accidents, 1890. 102
Roads in France..... 104
Ruling diffraction gratings..... 102
Science, engineering, a new..... 101
Steel for guns and armor..... 105
Sun, a violent eruption of the.... 96
Trees, big, in California*..... 103
Triangle, steel, how to make (4011)..... 107
Wood, Walter A..... 97
Wool, the whitening of..... 97

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 841.

For the Week Ending February 13, 1892.

Price 10 cents. For sale by all newsdealers.

PAGE

I. ANTHROPOLOGY.—Investigation of a Mound near Jefferson City, Mo.—By A. S. LOGAN.—Prehistoric remains from the banks of the Missouri River..... 13444
II. BIOLOGY.—New Observations on the Language of Animals.—By M. DE LACAZE DUTHIERS.—A lengthy examination of some facts in the language of animals, including birds and quadrupeds..... 13431
III. BOTANY.—Electricity in Agriculture.—By CLARENCE D. WARNER.—The effect of currents of electricity upon the germination of seeds.—Interesting experiments detailed, which can be easily repeated..... 13436
Electricity in Horticulture.—The effect of the electric light on vegetation, availability it may possess for the gardener..... 13435
Pentapterygium Serpens.—A Himalayan flowering plant introduced in England about ten years ago.—2 illustrations..... 13434
The Perforation of Flowers.—What insects do to promote the propagation of plants by perforating the flowers in search of honey.—16 illustrations..... 13435
IV. CHEMISTRY.—A New Laboratory Process for Preparing Hydrobromic Acid.—By G. S. NEWTH.—Simple synthesis of hydrogen and bromium..... 13445
Boron Salts.—Boron sulphides and selenides and silicon selenide 13445
Detection of Peanut Oil in Olive Oil.—A practical laboratory test for the above adulteration..... 13446
Hydroxylamine.—Recent preparation of this compound and its properties..... 13446
New Boron Compounds.—Compounds of boron, phosphorus, and iodine recently prepared by M. MOISSAN..... 13444
Sapotin, a New Glucoside.—By GUSTAVE MICHAUD.—Preparation of a new glucoside from almonds and other sources..... 13445
V. CIVIL ENGINEERING.—Completion of the Mersey Tunnel Railway.—The penetration of the bed of the Mersey River by a tunnel at the rate of 150 feet per week.—Details of the work..... 13439
VI. EDUCATIONAL SCIENCE.—Chinese Competitive Examinations.—Interesting details of the famous examinations of China.—Fatal consequences to overworked competitors..... 13437
VII. ELECTRICAL ENGINEERING.—High Speed Engine and Dynamo.—A high speed compound engine, running at 500 revolutions per minute, with direct-driven dynamo for electric lighting.—3 illustrations..... 13438
VIII. MEDICINE.—The Treatment of Rattlesnake Bite by Permanganate of Potassium, Based on Nine Successful Cases.—By AMOS W. BARBER, M.D.—The use of this powerful disinfectant, and the proper treatment and mode of applying it..... 13437
IX. METEOROLOGY.—Modification of Our Climate.—By JOSEPH WALLACE.—Climate epochs and the probabilities of the present climatic era.—Changes within the records of man..... 13433
The Eruption of Krakatoa.—A graphic description of this catastrophe, involving the lives of 35,000 people..... 13434
X. MILITARY ENGINEERING.—The Military Engineer and His Work.—By Col. W. R. KING.—A Sibley College lecture, treating of the special problems in fortifications, sieges, and the more pacific work of surveys and explorations..... 13440
XI. MINERALOGY.—Natural Sulphide of Gold.—By T. W. T. ATHERTON.—A probable new occurrence of gold..... 13445
XII. NATURAL HISTORY.—The Living Jerboa in the Zoological Garden of Berlin.—A rare rodent from South Africa, one seldom seen alive in captivity.—5 illustrations..... 13431
XIII. NAVAL ENGINEERING.—Twenty-four Knot Steamers.—The possibility of fast ships for long voyages.—The prospects and difficulties..... 13439
XIV. RAILROAD ENGINEERING.—A Steam Street Railway Motor.—A noiseless motor built of steel on trial in Chicago.—1 illustration..... 13439
XV. SANITARY ENGINEERING.—Some Means of Purifying Water.—Different filtering processes and the subsidence treatment of water..... 13445
XVI. TECHNOLOGY.—Action of Caustic Soda on Wood.—By M. H. TAUSS.—Direct experiments on the action of lye on wood at various pressures..... 13444
Burning Brick with Crude Oil Fuel.—The use of petroleum in brick kilns.—Its advantages, cleanliness, and cheapness..... 13443
Chlorine Gas and Soda by the Electrolytic Process.—The decomposition of common salt solution into chlorine and canstic soda on the commercial scale..... 13438
How Enameled Letters are Made.—The manufacture of separate enameled letters as conducted in London.—5 illustrations..... 13442
How Mechanical Rubber Goods are Made.—Hose, corrugated matting, packing, and jar rings.—Processes of their production.... 13442

A VIOLENT ERUPTION OF THE SUN.

A very remarkable eruption of a solar prominence was observed on June 17 of the past year, at the Haynald Observatory, Kalocsa, Hungary, by the eminent astronomer, Julius Fenyi. At about a quarter to six in the evening the first signs of the eruption were seen, and eighteen minutes later the great mass of intensely heated matter was found by spectroscopic observation to be in rapid motion. The enormous displacement of the spectrum toward the blue indicated an apparent shortening of the ether waves due to rapid motion of the glowing matter toward the earth. The prominence was essentially hydrogen. Several observations for velocity were taken, a direct maximum of 890 kilometers per second, equal to 553 statute miles, being obtained. The mass represented a suspended column, subtending 111 seconds, and rose while observed to a height subtending 256·9 seconds of arc. But the velocity was not only in the direction toward the observer, it also moved laterally and also in the meridian. Combining two of the different velocities, a probable resultant velocity of 1,014 kilometers, or 630 miles, per second is obtained, leaving out of account any movement in the meridian. This is sixteen hundred times faster than a cannon ball moves, and is enough to indicate the projection of the hydrogen into space out of the sphere controlled by the sun's attraction.

The cause of the outbreak and its final result are mysteries. M. Fenyi even appeals to electricity as the possible cause. The next query would be, Where did the great mass of hydrogen go? Did it fly through space like a drifting cloud, to be torn to pieces and distributed to different orbs as a constituent of their atmosphere? If it possessed quality enough of gravitation to keep its mass together, it might, when appropriated by some distant orb, gravely modify its atmosphere. It might find oxygen enough in such atmosphere to combine with and produce a conflagration to be revealed to our astronomers years hence, when the ether waves announcing the disturbance would have traveled to the earth.

From the magnetic records at Greenwich Observatory, in England, it appears that there was a marked magnetic disturbance, very short lived but clearly registered, at the time of a similar disturbance observed from Paris on the same day. But this was slight in extent compared to other perturbations.

THE CONGRESSIONAL REPORT OF THE COMMISSIONER OF PATENTS.

Two annual reports are made by the Commissioner of Patents, one in the middle of the year, July, to the Secretary of the Interior, the other in January, to the Senate and House of Representatives. The latter has just been presented by Commissioner of Patents W. E. Simonds, late Member of Congress from Connecticut. It is his first report, and is a most able and interesting document. The value and importance of the services rendered by inventors are eloquently set forth, and the measures necessary to enable the public to reap benefits from these services are described. Among the means to these ends the improvement of the Patent Office is shown to be essential. Its present crowded condition is disastrous to all concerned. The health and efficiency of employes are sacrificed for want of room for air and action. The report concludes with several valuable suggestions for modifications of the existing patent laws in the interest of inventors and the people. We make the following abstracts from the report:

The total number of applications for patents during the year 1891 was 40,452. Total number issued, 23,244. Total receipts, $1,271,285. Expenses, $1,139,713. Balance now in the United States Treasury on account of the patent fund, $4,004,317. The Commissioner says:

"As regards the rooms occupied by the examiners, the need is urgent. The cubic feet of space per occupant is 916 feet. Dr. John S. Billings, in his work entitled 'The Principles of Ventilation and Heating,' gives 4,200 cubic feet as necessary for each person in a room with 'ordinary ventilation' for two consecutive hours of occupancy. These examiners' rooms are occupied seven consecutive hours each day, with the exception of half an hour for luncheon. These rooms hardly attain what might be called 'ordinary ventilation,' for all of them are dependent upon the doors and windows for fresh air, except that one of them has a small ventilating register, which cannot be used, and five of them have grate fires, which to a degree assist the ventilation. The heating is attained in some rooms by the steam pipes, in others by hot air registers, and in still others by stoves. It is the rule rather than the exception in these rooms that the floor space is so occupied by desks and cases for papers that the occupants move about in them through tortuous lanes. Cases of drawings belonging to the patented files are necessarily located in large number along the sides of the corridors, where the public passes to and fro. This is unsafe and unsightly. This state of affairs not only puts unnecessary discomfort upon the examiners, but it also unfavorably affects their health, and, to a degree that is more than noticeable, prevents them from doing work to their full capacity."

The public benefits resulting from the policy of granting patents are sketched by the commissioner as follows: "The vast majority of our great manufacturing industries were originally based upon inventions recorded in the United States Patent Office. The following are a few and only a few of the American inventors whose reputation has become national and whose improvements have formed the foundation of manufacturing industries of great magnitude: John Fitch, Robert Fulton, and James Rumsey as to steamboats; Eli Whitney, as to the cotton gin; Oliver Evans, as to milling machinery; Amos Whittemore, Erastus B. Bigelow, and Barton H. Jenks, as to looms; Eli Terry, Ira Ives, Noble Jerome, and Chauncey Jerome, as to clocks; Peter Lorillard, as to tobacco making; E. I. Dupont de Nemours, as to gun powder; Jesse Reed, as to nail making; William Edwards, as to leather making; Jethro Wood, as to iron plows; Thomas Blanchard, as to lathes for turning irregular forms; Asa Spencer, as to geometrical lathes; Richard M. Hoe, Isaac Adams, Stephen P. Ruggles, Andrew Campbell, Moses S. Beach, and G. P. Gordon, as to printing presses; Samuel W. Collins and Elisha K. Root, as to ax making; Oliver Ames, as to shovels; William Woodworth, as to wood working; Thaddeus Fairbanks, as to scales; John J. Howe and Chauncey C. Crosby, as to pin making; Eliphalet Nott and Jordan L. Mott, as to stoves; Robert L. and Alexander Stuart, as to sugar refining; Matthew W. Baldwin and Ross Winans, as to locomotives; Cyrus H. McCormick and William P. Ketchum, as to mowing and reaping; Samuel Colt, Ethan Allen, Christian Sharps, Edmund Maynard, Rollin White, Christopher M. Spencer, Horace Smith, and Daniel P. Wesson, as to fire arms; Alonzo D. Phillips, as to friction matches; Henry A. Wells, as to hat making; Charles Goodyear, Nathaniel Hayward, and Horace H. Day, as to India rubber; John Ericsson, as to naval construction and hot air engines; Elias Howe, Jr., Allen B. Wilson, Isaac Singer, J. E. A Gibbs, William O. Grover, and William E. Baker, as to sewing machines; S. F. B. Morse, Royal E. House, and David E. Hughes, as to telegraphs; Henry B. Tatham, as to lead pipe; Cullen Whipple, as to wood screws; Jonas Chickering and Henry Steinway, Jr., as to pianos; Henry Burden, as to horseshoe machinery; Linus Yale, as to locks; John A. Roebling, as to cables, chains, and bridges; George H. Corliss, as to steam engines; Asa Whitney and Nathan Washburn, as to car wheels; Gail Borden, Jr., as to condensed milk; William and Coleman Sellers, as to shafting and iron working; Henry Disston, as to saws; James J. Mapes, as to fertilizers; John Stephenson, as to horse cars; R. P. Parrott, as to cannon; Richard J. Gatling, as to Gatling guns.

These men and thousands of others like them enjoyed for a little time the ownership of the property they produced by their own brains and their own hands, out of materials belonging to no one else, and that property of vast and peculiar value has been given to the American people forever. Even during the few years that they enjoyed the ownership of the property, which was theirs by the best and highest of all possible titles—that of creation—they realized but a small fraction of the benefits flowing from their improvements. Even during that limited period the lion's share inured to the public benefit in added comfort and lowered prices.

The patent law does not exist for the benefit of inventors. It exists for the benefit of the public. The enlightened public selfishness which called that act into being was expressed in the organic law—in the Constitution of the United States—when Congress was therein authorized to secure 'for limited times to authors and inventors the exclusive right to their respective writings and discoveries,' in order 'to promote the progress of science and useful arts.' The magnificent degree in which the progress of science and the useful arts has been promoted in America by wise patent laws ought to be clear to the dullest comprehension.

The benefits of the patent system are by no means confined to the manufacturing industries. It may well be doubted whether the larger benefits do not flow to that portion of our people who seem to have the least connection with those industries. It was Whitney's improvement in the cotton gin which made possible the marvelous cotton culture of the South, producing thirty-six hundred and twenty-two million pounds of the staple in 1889, which without the schoolmaster's invention would have required the labor of three millions of men for a year simply to clean it.

The settlement and cultivation of the great West have been made possible only by patented improvements in agriculture and in transportation. Under the old order of things it would have required the labor of all the men and boys in the United States, some twenty-four millions in number, to plant and till and harvest the American corn crop of 1889, it being more than two thousand millions of bushels, raised upon seventy-eight million acres of land, leaving to take care of itself meanwhile four hundred and ninety million bushels of wheat and seven hundred and fifty million bushels of oats produced in that

© 1892 SCIENTIFIC AMERICAN, INC.

same year. And under that old order of things the value of each bushel of this grain would have been consumed in transporting it three hundred miles, while now it is carried across a continent and across an ocean and still sold at a living profit.

There is no class or condition of men in the whole country which has not felt the blessings of American inventive genius, fostered into its fullest flower by wise and kindly patent laws.

That same inventive genius has greatly enlarged the employment of manual labor and enhanced its wage. Every calculation to the contrary, based upon doing a modern volume of business by the number of men who would have done it under the old order of things, has the fatal defect of forgetting the inevitable relation between lessened price and increased consumption. The man who, at the meeting of the American Social Science Association in 1878, calculated that on a single great modern daily newspaper a few men, using modern machinery, had practically displaced more than five thousand printers, using the press of Benjamin Franklin, omitted to note that the wages of this army would have so raised the cost of the journal as to annihilate its circulation and destroy the enterprise. It is an absolute condition of the doing of any modern volume of business that it shall be done in the way it is done.

"No greater labor-saving device than the sewing machine was ever invented, or is ever likely to be; but its introduction into common use greatly enlarged the field of manual labor. In 1838 Walter Hunt had all but perfected a practical sewing machine; but upon the protest of his wife as to its effect upon tailors and sewing women he gave his invention over to darkness and oblivion. Nevertheless, the sewing machine was made a common thing between 1850 and 1870—a period of time in our national life more important and interesting in most particulars than any other similar period. In 1850 there were fifty-two thousand tailors in a population of twenty-three millions, or one tailor to four hundred and forty-two inhabitants. In 1870 there were one hundred and six thousand tailors in a population of thirty-eight millions, or one tailor to three hundred and fifty-eight inhabitants. Population in these two decades increased sixty-five per cent; but the number of tailors increased more than one hundred per cent. Meanwhile the manufacture and sale of sewing machines had given profitable employment to at least forty thousand persons, and millions of sewing machines had gone into use in factories and families, effecting a saving well-nigh measureless in that labor which is performed with the needle.

"The locomotive is another immense labor-saver, which first became common in America in the period between 1850 and 1870, and while in those two decades the population increased sixty-five per cent, the makers of common carriages and wagons increased in number more than two hundred per cent.

"Among the English-speaking peoples, never, since they crept out of the twilight of the Middle Ages, has the beneficial effect of wise patent laws been seriously questioned."

The Whitening of Wool.

We owe to M. Hofmann, of Dresden, an interesting communication on the process employed for producing a pure white on wool. It is well known that it is impossible, even by the aid of the most active bleaching agents, to remove from the wool a faint shade of yellow, which becomes specially noticeable when the material is contrasted with silk or cotton. The neutralization of this yellow by a complementary blue, such as is used for cotton, linen, paper, etc., only gives poor and unsatisfactory results. Attempts have long been made to give wool a better white by means of white topping substances, such as magnesium carbonate. This method has had, however, to be given up on account of the dust formed after a short period of storage. The author proposes to obtain a better result by vegetalizing the wool, that is to say by impregnating it with a solution of cuprous oxide in ammonia, and then passing the fiber into a solution of sugar or dilute acid, which precipitates the cellulose in an insoluble form, and thus fixes it. To render the gelatinous cellulose thus deposited opaque and white, the material is dipped into ether. The same result is obtained by F. V. Hallah, by the use of hyposulphite (the old hydrosulphite) of soda and indigo. The effect produced is of two kinds: The hydrosulphite produces decolorization by its energetic reducing action, and by dissolving the indigo mechanically deposited on the surface of the tissue, causes the coloring matter to penetrate uniformly into the fiber. The blue color is restored to the indigo by a subsequent exposure to the air, and, being complementary to the yellow of the wool, completely destroys it. It is very doubtful whether, even under these conditions, a perfect equilibrium is attained between the yellow shade which is to be removed and the blue of the indigo. We have already observed that the numerous attempts previously made in this direction, with various coloring matters, have resulted in failure. However this may be, the method as given by the *Deutsche Farb. Zeit.* is as follows:

The hyposulphite solution should be prepared immediately before use. For this purpose, 7 parts of zinc dust, or 20 to 30 parts of granulated or sheet zinc, are digested with a concentrated solution of bisulphite of sodium, representing about 100 parts of the dry salt. The operation is carried on in a well closed vessel, which must be shaken up at intervals during an hour. The clear liquid is decanted, and contains hyposulphite of sodium, together with some of the zinc salt. The woolen material, carefully purified, washed, and freed from fat, etc., is thoroughly moistened in a bath of cold water, in which indigo is suspended in a very fine state of division. The best quality for the purpose is that which gives bright blues of a reddish shade in the vat process. The material emerges from the bath covered over with particles of indigo deposited on the surface. It is then passed into the bleaching solution, which is composed of water and hyposulphite solution at 1° to 4° Baume. Just before passing in the material, a quantity of acetic acid, equivalent to the hyposulphite present, is added. It is essential that the stuff be properly manipulated, so that the reduction of the indigo proceeds with perfect regularity.—*Le Mon. de la Teinture.*

Dr. Crerar's Cure for Influenza.

"There can be no question," says the London *Lancet*, "as to the advantage of having prompt recourse to rest in bed and a persevering administration of easily assimilable food, together with such special remedies as may be called for by the type of the disorder. Every practitioner knows that the manifestations of influenza are by no means uniform, that in some the headache, pains, and prostration, in others gastric or pulmonary catarrh, predominate, and he has to regulate his choice of remedies accordingly. Few are prepared to admit that, even with the adoption of all precautions, it is possible to ward off the supervention of severe bronchitis or pneumonia, which carries off so many of the weakly and the aged, or to prevent the protracted convalescence and the nervous sequelæ that characterize a certain number of cases. When, however, we attempt to realize the extent to which influenza prevails, and estimate its gravity in proportion to its morbidity, even the long list of fatalities dwindles to almost insignificant proportions. Still, this is but small consolation, and the demand for some truly specific or antidotal remedy is perhaps natural. Many such have been introduced—some, to be sure, with little reason, and all based more or less upon theoretical considerations. There is, however, one remedy which, from its simplicity and from the very confident opinion expressed by its introducer, may be singled out, in order, if possible, to get some more general opinion as to its merits. We refer to the use of large and repeated doses (thirty grains every two or three hours) of potassium bicarbonate, which Mr. Crerar, of Maryport, introduced to the notice of his fellow practitioners in an address he delivered in 1891, as president of the Border Counties Branch of the British Medical Association.

"We need not concern ourselves with the somewhat strained analogies and arguments adduced by Mr. Crerar in that paper, or dwell on the fact that it is not possible from his address to perceive why he should have come to the conclusion that the influenza poison could be neutralized by increasing the alkalinity of the blood. We may fail to be convinced of his logic, and yet not refuse to accept his facts; and the evident sincerity of his statements, which, in a paper he has just forwarded to us, are supported by the experience of others, and particularly by the personal testimony of a well known teacher in Edinburgh University, together with the results of the treatment in the wards of the Edinburgh Infirmary, seem to warrant some attention being paid to them. It is not necessary to give the text of this paper, which mainly consists in the citation of such testimony, but in justice to its author we may quote his conclusions as to the advantages of the method. They are:

"'1. If used before the attack, it prevents the disease. 2. It destroys the power of the disease within twenty-four hours, generally within four or six hours. 3. The strength is conserved, and the convalescence is short and satisfactory. 4. Sequelæ are conspicuous by their absence. 5. The death rate is reduced to a minimum. I have not had any death in more than one thousand cases. 6. It has more power over influenza than I have ever seen exerted by any method of treatment over any other disease, and I have had an extensive practice for upward of a quarter of a century. 7. If adopted by the whole profession, it would make influenza non-existent in one week. 8. It rests upon a sound scientific foundation.'

"The last two conclusions may be open to question, but the preceding are statements which no medical practitioner of standing would venture to put forward without good cause. Therefore, without in any way desiring to bias opinion, we have, after due consideration, deemed it only right to call attention to these statements in order that they may be put to the test. No doubt one's first impulse is toward incredulity, but *prima facie* it can hardly be asserted that the method is unreasonable, although the administration of such large doses of a salt that has undoubtedly a depressing action on the circulation is surely a step to be taken with circumspection and care, especially in a disease so characterized by depression as influenza."

The Earth an Outer Shell with a Fluid Filling.

Just why the magnetic needle, instead of pointing due northward, inclines to one side to a greater or less degree, and why the region toward which it is directed keeps shifting slowly, is a problem which has for ages baffled the wisest men. But a solution of it which, if it is not accepted by the scientific world as complete and final, at least has much to commend it to instant favor, is now offered by Henry Wilde, F.R.S. It is briefly discussed in the *American Meteorological Journal* for January by that new, though already eminent, authority on terrestrial magnetism, Professor Frank H. Bigelow.

Mr. Wilde has come to the conclusion that the outer shell of the earth and the great mass within rotate somewhat independently of each other. The interior portion, still in a liquid condition, he conceives as continuing to revolve about the axis which our planet had in its infancy; that is, one perpendicular to the plane of the ecliptic. Somehow, in the great cataclysm in which the moon was thrown off from the earth, the crust of our globe was, he thinks, skewed over to one side about twenty-three degrees; and this part of our sphere, therefore, revolves about what we call "the geographical pole." The inner mass, like the other planets and the sun, he regards as electro-dynamic; while the shell is electro-magnetic. Furthermore, two causes are supposed to render those portions of the earth's exterior underlying the oceans more highly magnetic than others: the permanent low temperatures at the bottom of the ocean, and the greater amount of iron here included, the crust being thicker under the seas than elsewhere.

For purposes of demonstration Mr. Wilde constructs a machine, consisting of one sphere within another slightly larger one, both converted into magnets by coils of wire encircling them. Upon those portions of the shell which correspond to the oceans he attaches magnetized sheet iron. And by means of proper gearing he makes the inner and outer spheres rotate on axes 23½ degrees apart. Finally, for test purposes, he provides for temporarily fixing a magnetic needle at any point on the surface of globe. With this ingenious apparatus, he declares he can reproduce every known variation of intensity and direction in terrestrial magnetism of which he can find a record; and, what is the convincing feature of his experiment, the real magnetic history of all parts of the world for the last four centuries, so far as he can learn it, is actually repeated in the minutest details when the inner sphere is made to fall behind the outer one, in their revolution, at the rate of 22½ minutes of an arc annually! That exceedingly well informed and cautious expert, Dr. Charles A. Schott, of the United States Coast and Geodetic Survey, tells Professor Bigelow that he has records of magnetic variations of which Mr. Wilde is evidently ignorant; and that when these are used as tests, in addition to the vast number of verifications Mr. Wilde has presented, the theory still holds good. The period of time here required for one whole "secular" change is 960 years, which agrees with the values of Sir William Thomson, though differing somewhat from tradition.

The only doubt which will remain in any scientific mind regarding the soundness of Mr. Wilde's explanations, after studying this magnificent demonstration, will probably spring from the notion, now widely entertained by physicists, that the earth is solid to its core. Sir William Thomson has expressed the belief that the whole globe is as rigid as glass, if not as firm as steel. Yet Mr. Wilde declares himself thus confidently: "From the various movements of the declination and inclination needles, correlated with each other in direction, time, and amount, on different parts of the earth's surface, the theory of a fluid interior may now be considered to be as firmly established as the doctrine of the diurnal rotation of the earth on its axis."—*N. Y. Tribune.*

Walter A. Wood.

The Hon. Walter Abbot Wood, the inventor, and founder of the manufactory of harvesting machines, well known all over the world, died, aged seventy-six, at his residence at Hoosick Falls, New York, on the 15th ult., from the effects of influenza and pneumonia. He was one of the earliest and largest makers of reaping and mowing machines, beginning in 1852, since which time he and the company of which he was president have made nearly a million machines. They made the first wire and string self-binders ever sold. Mr. Wood had had conferred upon him the Legion of Honor, by the Emperor Napoleon III., at Paris, in 1867, and the Francis Joseph Cross by the Emperor of Austria at Vienna, in 1873. He represented his district in Congress for four years from 1878 to 1882.

THE first theater in the United States was at Williamsburg, Va., in 1752.

© 1892 SCIENTIFIC AMERICAN, INC.

NEW SYSTEM OF MARITIME NAVIGATION.

At a recent session of the French Academy of Sciences, Mr. Gustave Trouvé presented a paper upon a new system of maritime navigation with which he has for some time been experimenting. In this system locomotion is evidently possible only through the aid of floats, but as regards methods of propulsion there exists an infinite number. Now, Mr. Trouvé has always been struck with the great difference observed between the speeds of locomotives and ships. Although the latter are provided with engines that are much more powerful than those employed in terrestrial propulsion, they nevertheless attain a speed half less than that of the former. This great kinematic inferiority of ships he attributes to the enormous resistance offered to them by the water in which they are partially submerged, and it is to the diminishing of such resistance, by transforming the submerged floating portion, that he has devoted himself. But do the two functions of sustentation and propulsion each necessitate, in reality, its own particular organs? May not a single apparatus suffice for them both? It was in order to solve these questions experimentally that Mr. Trouvé, as long ago as 1885, designed the apparatus of which a side and front view is given in Fig. 1.

A light boat is carried by a sort of tricycle, whose large wheels have a submerged volume sufficient to maintain, of themselves alone, the entire system upon the surface of the water. These wheels are hollow, and the circumference alone enters the water. In order the better to ascertain whether the thrust of sustentation should be divided between the boat and the wheels or reside solely in the propeller, and, if the first case is the best, in order to determine the exact ratio of the volume non-submerged, the small boat in which the experimenter is seated may, at the will of the pilot and by means of screws, be submerged by insensible degrees in the water, and the wheels thus be relieved, or it may be raised wholly above the water along with its passenger. The two large forward wheels are set in motion through the intermedium of an electric motor placed upon the boat. The third wheel is movable at the stern and serves as a rudder. All three are provided with paddles, after the fashion of mill wheels. The results obtained with this apparatus and an accident encouraged Mr. Trouvé to complete it. In fact, at a soirée at the Paris Observatory, he was exhibiting the propelling apparatus of his electric boats to Admiral Mouchez's guests, when he perceived that all his measurements had been badly made, and that his generators of electricity were too heavy for the little boat constructed for the occasion, and caused it to sink. As it was not possible to forego his exhibition, he resolved to have recourse to an artifice.

In the first place he suppressed the two heavy generators, and, under pretense of causing his boat to produce a useful effect, he formed, through alternate plates of zinc and copper supported by corks, a small float which he connected with the boat and propelling apparatus by the conducting wires themselves. As for the liquid, wishing on the one hand to allow it to preserve the aspect of ordinary limpid water, and, on another hand, recalling the fact that sea water had already been used as a liquid in certain batteries, he contented himself with saturating his liquid with sea salt. The boat and float then sailed as well as could be desired.

A short time afterward Mr. Trouvé renewed his experiments upon a larger scale, with a sea water battery, and his new experiments showed him that the water of the ocean furnished a much higher potential than did the artificial saline solution, the electro-motive force of a single element sensibly reaching one volt. They taught him also that the water of the Mediterranean was more electrogenic than that of the ocean, owing to a greater evaporation under the influence of a warmer climate, and consequently to a more perfect saturation than that of the Atlantic, the mean temperature of which is lower. He found that the electro-motive force is, moreover, variable from day to day for the same source, and that the solubility of the salts plays here again the principal if not the only role.

In the application of this system on a large scale, a battery float is placed astern of the vessel (Fig. 2), and the elements, united in a battery, being submerged, the current is led to the motor on the vessel through the aid of two cables containing the conductors. At least five or six volts are thus obtained without any trouble. Moreover, in order to prevent breakage, care must be taken to render the connecting cables and the conductors independent, as the latter never have to undergo direct traction. During a violent tempest, and in all cases where a stoppage is usually made, the battery may be taken on board, its weight being relatively light. In order to lighten the weight of the elements in the water, Mr. Trouvé bends the copper plates upon themselves and closes the hollow mass thus formed, so that the thrust of the liquid perfectly balances the total weight of the couples.

As for the floating battery, that possesses a great advantage over steam, in that it can be immediately exchanged in a port of supplies. The exchange is effected much more quickly than is the ordinary loading with coal. Floating batteries already prepared may await the ships in a dry place.

The power of such a battery is much greater than might be thought at first sight. In fact, if we take, for example, a vessel 100 meters in length and 16 in breadth, and suppose that the elements and their electrodes are 1 decimeter distant from each other, and that they plunge to a depth of 4 meters in the sea, the total active superficies will be 800 square meters (since the two surfaces are utilized), or, at the rate of five plates per running meter of width of float, 4,000 square meters, and, for the 16 meters of breadth, 64,000 square meters. Admitting, now, that we have at our disposal an electro-motive force (and it is minimum) of 6 volts, and of an intensity of 10 amperes per square meter, let us say, in a word, 60 watts per meter of superficies, or practically 6 kilogrammeters, and we shall have at our disposal a power of more than 5,000 horses. Mr. Trouvé remarks that the energy discharged can but increase with the speed, since the hydrogen of the electrolyte is driven away by the current of water that is created between the elements, and induced currents have hardly the time to form. There is, then, in short, no polarization, and this redoubling of energy is comparable to that which we observe in a battery when the liquid is agitated.

Mr. Trouvé asserts, in conclusion, that his new system of maritime navigation with sea water battery is based upon solid data verified by the experiments that he has made, in company with Mr. De Nabat, on a boat 8 meters in length running at a speed of 8 kilometers per hour. He employs the geometrically perfect screw constructed after a new process that he presented to the Academy of Sciences on the 12th of July, 1886.

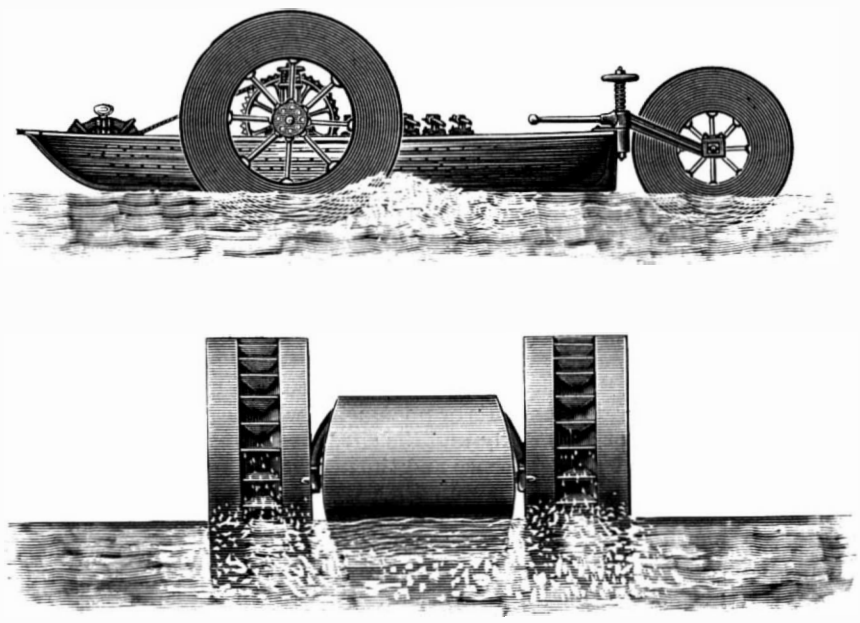

Fig. 1.—SIDE AND FRONT VIEWS OF TROUVE'S ELECTRIC BOAT, IN WHICH THE PROPELLER AND THE FLOAT ARE COMBINED.

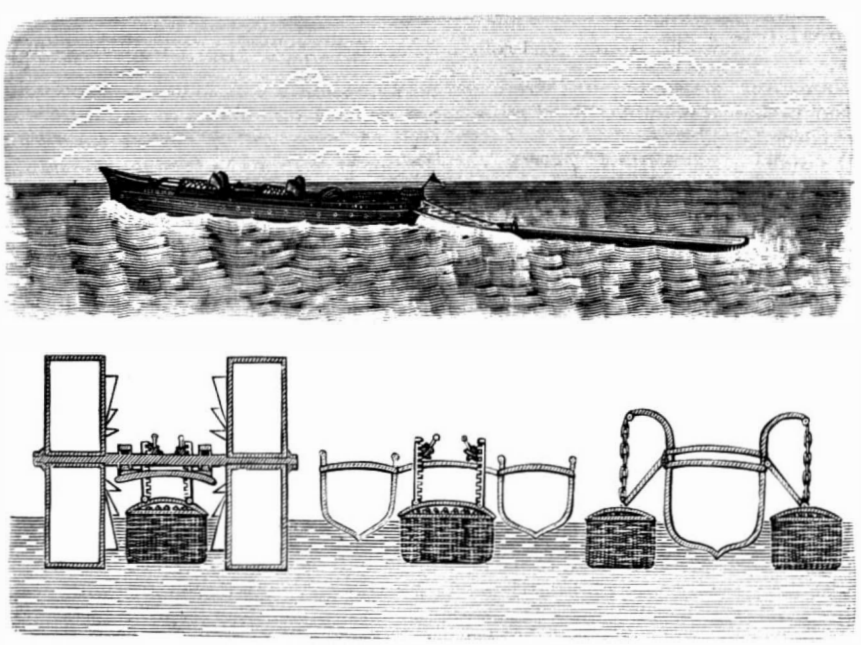

Fig. 2.—FLOATING BATTERY TOWED ASTERN OF A BOAT, OR ARRANGED UPON THE FLOAT PROPELLER.

Electricity in Paper.

No discovery has yet been made, and no contrivance has been introduced, says the *American Art Printer*, that will absolutely dissipate or nullify the disturbing effects of electricity in paper, either latent or generated by the revolutions of the press. Many employers have paid out considerable money to electrical experts and others who claimed to have discovered or to be in possession of infallible remedies for this trouble; but not one of them has squarely fulfilled the terms of this contract. We have studied the effect of wires connected with batteries and of wires connected with gas or other pipes leading to the ground; the latter on the principle of the lightning rod. While these do to a certain extent help to modify the action of electricity or the generation of it, they fall far short of doing it effectively and completely, and for that reason do not justify the outlay of much money upon them.

Again, many printeries throughout the country, beyond the reach of those who could help them with the appliances described, are at an expense which, as we have just said, the modicum of benefit that would be desired would not justify. It is for this reason that we recommend to all who have trouble with electricity in paper the adoption of the simple and inexpensive but surprisingly effective remedy we now present.

In nearly every printery a bottle of glycerine is kept for one purpose or another. Take this bottle and a clean rag or other cloth, wet the cloth with water and wring it out well until it is only damp, then pour a little glycerine upon the damp cloth, and wipe the surface of the tympan sheet with it, only on that part of the sheet where the impression is, as it is there that the reaction is effected—at the point of pressure. Do not put on too much glycerine, as it will wrinkle the sheet too much. Simply go over it as you would in oiling the sheet to prevent offset, but do not saturate it. If you find that one application or wiping will not stop the trouble, go over the impression parts again in the same manner. Some kinds of stock are more susceptible than others, and call for an additional application.

This is the simplest and cheapest of all the remedies, and as good as any hitherto known.—*American Art Printer*.

Irrigation in Montana.

Census Bulletin, No. 153, the fifth of the series devoted to irrigation in the arid States and Territories, has been prepared Mr. F. H. Newell, special agent of the Census Office for the collection of statistics of irrigation, under the direction of Mr. John Hyde, special agent in charge of the Division of Agriculture, and relates to the State of Montana, in which there are 3,706 farms that are irrigated out of a total number of 5,664. The total area of land upon which crops were raised by irrigation in the census year ending May 31, 1890, was 350,582 acres, in addition to which there were approximately 217,000 acres irrigated for grazing purposes. The average size of the irrigated farms, or, more strictly, of irrigated portions of farms on which crops were raised, is 95 acres. The average first cost of water right is $4.63 per acre, and the average cost of preparing the soil for cultivation, including the purchase price of the land, is $9.54 per acre. The average present value of the irrigated land of the State, including buildings, etc., is reported as $49.50 per acre, showing an apparent profit, less cost of buildings, of $35.33 per acre. The average annual cost of water is $0.95 per acre, which, deducted from the average annual value of products per acre, leaves an average annual return of $12.01 per acre.

The farms or stock ranches in Montana irrigated merely for grazing purposes have therefore not been taken into account in this bulletin beyond the foregoing statement as to their approximate total area.

The Proposed Columbian Tower.

We have received from Chs. Baillargé, C.E., one of the competing architects for the London tower, a communication favoring the idea of a gigantic globe for a monument instead of the servile imitation of the Eiffel tower. By inclining the axis so as to lie in parallelism with that of the earth the visitor would, at the highest point, emerge out at Chicago, and see near him the models of Columbus' galleys approaching the unknown coast. He proposes that the interior should represent the firmament, with incandescent lamps of varying power representing the stars.

© 1892 SCIENTIFIC AMERICAN, INC.

A STRAINING AND MEASURING POT.

The straining and measuring pot shown in the illustration is designed to be especially useful and convenient in families, drug stores, etc. Upon its body, at spaced distances, are ribs or rings to afford means of measuring the contents of the vessel. A removable funnel strainer, A, has a flange or rim fitting in an annular recess around the top of the pot, to offer no obstruction to the closing of the cover, and the liquid with which the pot is supplied is passed through this strainer. The funnel-shaped outlet is also supplied with a strainer, B, by which the contents are strained while being poured out, two strainings being thus effected. The spout of the discharge pipe has a cap stopper to prevent the entrance of insects, dust, etc.

STANTON'S STRAINING AND MEASURING POT.

This improvement has been patented in the United States, Great Britain, and France, by Mr. George C. Stanton, of New Iberia, La., to whom application may be made for further particulars.

AN IMPROVED CULTIVATOR.

A cultivator especially adapted for working sugar cane and similar plants is shown in the illustration. It is of simple and durable construction, and the rotary hoe consists of a series of teeth whose upper ends are elastically secured, so that when the teeth come in contact with the cane stalks they will yield sufficiently to prevent injury. The improvement has been patented by Mr. William H. Waggoner, of Patterson, La. The frame of the machine is centrally braced by a longitudinal angle beam, and on each end of the axle, near the supporting wheels, are ratchets engaged by spring-pressed dogs on the wheel hubs, the dogs being readily held out of engagement with the ratchets by bolts when desired, as when taking the machine to or from the field, etc. Just front of the axle, journaled in the longitudinal brace beam and one of the sides of the frame, is a transverse shaft, on which is a pinion meshing with a spur gear on the axle, the transverse shaft having on its inner end a bevel gear meshing with a bevel pinion on a vertical shaft, to the lower end of which the hoe is secured. The hub of the bevel pinion turns in a suitable opening, and has a bearing at its lower end upon a yoke rigidly held to the bottom of the frame, the vertical shaft having a longitudinal key-slot and the hub of the pinion having a key extending into the slot, whereby the shaft may be vertically adjusted to raise or lower the hoe. The adjustment is effected by a lever fulcrumed on a standard, the lever having a spring-pressed pawl and auxiliary thumb lever, and the pawl engaging the teeth of a vertical rack. The hoe consists of a series of radial arms, as shown in the small figure, each of the arms consisting of two longitudinal sections, each having a longitudinal channel in its inner edge, with semicircular upper and lower aligning recesses for the teeth, the upper recesses being larger than the lower ones. The teeth are round, each having near its upper end a collar, and in the upper recesses of one section rubber sockets are placed, into which are introduced the upper ends of the teeth, the collars being located in the channels, and the other section being then bolted to place. With this arrangement the teeth will yield as they come in contact with obstacles, and may be swung in any direction, automatically returning to their normal upright position after passing the obstructions.

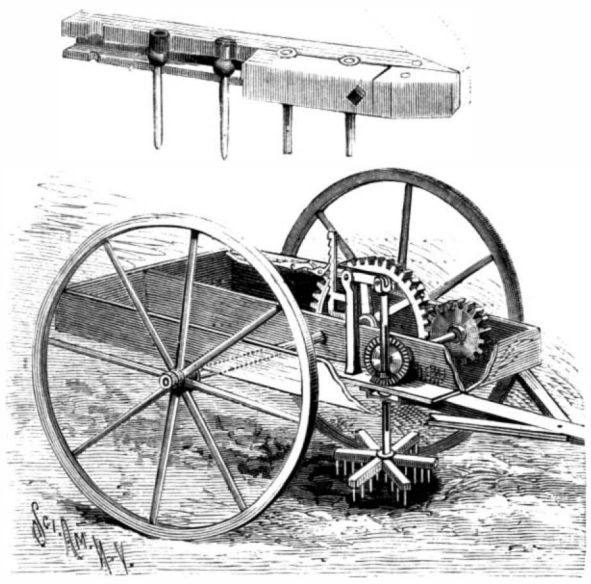

WAGGONER'S ROTARY CULTIVATOR.

A Wreck-Indicating Buoy.

A new device to indicate the position of wrecks by Mr. A. F. Ward, of Detroit, Mich., consists of a hollow ball of two halves, the bottom one being attached to a bed by a soluble glue joint. This bed is fixed to an iron plate which is screwed to the deck of the vessel or in any suitable position. As soon as the dissolution takes place the buoy rises, a cord, which can be of any length—1,000 feet and upward—and which is fixed on a reel in the hollow ball, reels off through the bottom of the ball. As soon as the latter reaches the surface the line stops paying out, the core of the reel being controlled by springs. The soluble joint is protected by a flange, which prevents water reaching it before the buoy has been submerged for some time, seas washing over the deck having no effect on it. The soluble joint can be arranged to dissolve within any time desired from 24 to 48 hours, and the cord may be replaced by copper wire when used in salt water.

AN ENSILAGE HARVESTER AND CHOPPER.

The illustration represents a machine designed to be taken out into a field of standing corn, and, with three horses and two men, cut down the corn, elevate it to chopping knives, cut it into half inch lengths, and then convey the product into a cart accompanying the machine. This work is designed to be effected at the rate of speed of a self-binder—from eight to ten acres, or 150 to 200 tons per day—thus practically putting ensilage within reach of farmers of very moderate means.

Cutting or harvesting knives are located at the front of the main frame, at the foot of a conveyer connecting at its upper end with a chopping box supported on a rear extension of the frame. Within the chopping box, immediately behind the upper conveyer-shaft, are two horizontal feed-rollers adapted to grasp and carry the fodder to a series of cutting blades, spirally arranged in a manner to form an open cylinder.

An inclined chute is located in the chopping-box, just below the knife cylinder, and carried downward and outward near the bottom, its projecting end extending nearly to a second rear conveyer leading upward and outward, in position to permit of a cart being driven beneath it to receive the chopped feed for transportation to the silo. All the mechanism is actuated by the drive-wheel journaled at the right hand side of the center of the main frame, there being erected around the wheel an upright framing, on the front upper portion of which is a bracket in which is journaled a reel shaft, the reel being of any approved construction and adapted to feed the standing grain to the harvester knives. The harvester knives are also actuated by a crank and pitman connected through the medium of shafts having bevel pinions and gears with one of the two spur wheels on the drive axle. The pinions may be readily disengaged from the gears to discontinue the motion of the harvesting knives and reel, as well as that of the chopping knives and both conveyers.

This one machine is intended to take the place and do the work of several machines now used in harvesting and chopping corn, oats, or other green fodder for ensilage. It is adapted to be drawn by horses or propelled by steam power, any farmer employing it being able, with his own help, to fill his silo at his leisure, and at far lower cost than at present. It is also adapted for use as a soiling machine, cutting all kinds of green crops for soiling cattle with the greatest ease.

For further information relative to this improvement, address W. J. Conroy, the patentee, Aylmer, Quebec, Canada.

Beet Sugar in Canada.

Following the example of the United States, the Canadian government has passed a law offering a bounty of one cent per pound on all beet root sugar produced in the Dominion between July 1, 1891, and July 1, 1893, with an additional bounty of three and one-third cents per one hundred pounds for each degree, or fraction of degree, over 70 degrees polariscope test.

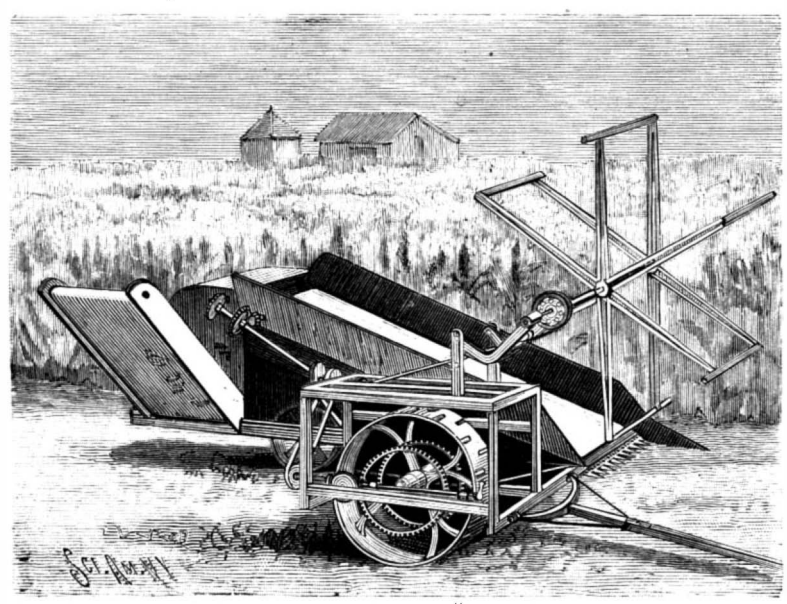

CONROY'S ENSILAGE HARVESTER AND CHOPPER.

AN IMPROVED CLOTHES LINE PULLEY.

The device shown in the illustration is of simple and durable construction, the line passing freely around the pulley and carrying with it a hanger to which the clothes are attached. The improvement has been patented by Mr. John J. Leuzinger, of West New Brighton, N. Y. The block in which the grooved pulley is pivoted has a semicircular recess in its under face, the recess extending through one edge of the block, and its side walls being concave. The pulley is of slightly less diameter than the diameter of the recess, leaving sufficient space between the peripheral surface of the pulley and the edges of the concaved walls for the line with the hanger to pass freely. The head of the bolt on which the pulley is pivoted is at the upper face of the block, and its lower end is provided with a suitable washer and a nut. The block has at one edge a lug or ear, with an eye or aperture, by means of which it may be secured to a hook or staple in a pole or other proper support, the pulley being on the under side of the device, while to the other support an ordinary pulley block may be attached. The hangers, any desired number of which may be secured upon the line, are of very simple construction, and may consist, as shown, of a ring screw, the ring of the required size for the line and the screw adapted to screw into the top of an ordinary spring clothes pin, the clothes being clamped in the pin by moving down upon it a clamping ring.

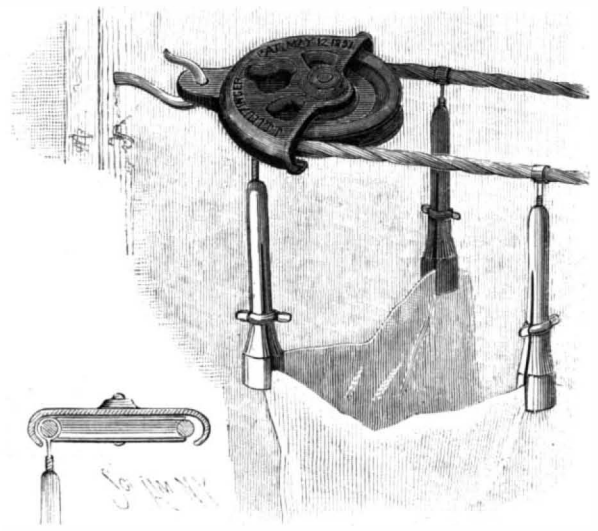

LEUZINGER'S CLOTHES LINE PULLEY.

Traced Lantern Slides.

When dealing with the production of lantern slides from book illustrations, it has occurred to me that were I to relate a very neat and simple way in which a particular class of illustrations may be readily produced by a mere tracing operation, it might tend to cause some beginners to practice this neat way of turning out a hand-made slide.

In my practice I always keep a stock of gelatinized glasses ready for my collodion work, and I find that with such I can trace over and make excellent productions by using a fine etching pen and ticketing ink. If any of my readers should have difficulty in procuring this kind of ink, they can make a very good substitute by dissolving a piece of lump sugar in ordinary writing ink. When doing this tracing operation the main thing is to get the ink to take kindly to the glass. If a worker will prepare a very weak solution of gelatine and flood the face of the glass plate, and then carefully dry the same free from dust, he will find he can write or sketch with the greatest of ease on its surface, and this being so it becomes a very easy matter to copy some rough sketches by hand, which, when projected on the screen in the shape of a lantern slide, will give unbounded satisfaction.—*T. N. Armstrong.*

© 1892 SCIENTIFIC AMERICAN, INC.

Correspondence.

The Progress of Electrical Science.

To the Editor of the Scientific American:

I have been almost a constant reader of your most valuable paper covering a period of more than twenty years. I have always taken great interest in your "Notes and Queries" department. Twenty years ago the most important queries and answers related to steam power, boilers, etc., interspersed with how to make cements, inks, paints, comparative velocity of the rim of a buggy wheel as compared with the hub, etc. While admitting that the queries and answers were interesting and valuable, and highly appreciated at the time. I would ask your readers to compare the twenty years' ago SCIENTIFIC AMERICAN with to-day and note the wonderful change that time has wrought. Take any number of the SCIENTIFIC AMERICAN issued during the last six months, and from five to fifteen queries and items will be found bearing on electricity and electrical machinery in some form. If I am to judge from the great interest taken in electrical currents and machinery, a vast army of men are to-day engaged on electrical inventions alone. The inventive genius of almost the entire world seems to have centered on electricity, and it is endeavoring to solve further hidden mysteries. Such being a fact, what may we not expect during the next decade? I predict that electrical inventions will be brought forward that will astonish the world. Are we not only just now in the dawn of great inventions?

The SCIENTIFIC AMERICAN has certainly done its full share in the good work. WM. M. SCHROCK.

Somerset, Pa., Jan. 26, 1892.

Ferns: Their Preservative Properties and Varied Uses.

MRS. N. PIKE.

People generally speak of the beauty of ferns, delight in collecting them for a herbarium or for ornamental purposes, and when the splendid specimens are exhibited in flower shows or conservatories, they deservedly call forth expressions of pleasure and admiration. They are known for their exquisitely formed and often daintily delicate fronds, but they are not generally credited with possessing economic value.

Ferns, lightly as they are valued, have always held an exalted rank in the community of plants; in fact, a dominant place in the past ages of the earth, when they formed one-fourth of the flora in the carboniferous period. Their use began early, for they entered largely into the formation of the coal we now use in so many ways, and on which so many industries depend.

To come down to modern times: every farmer is familiar with the common fern, the brake or bracken that grows so abundantly on open waste lands. Doubtless it is mostly only looked at as a weed to be rooted out. Yet, like many another simple wild plant, it has infinite uses in other countries, and perhaps, with a more extended knowledge of them, some of them might advantageously be adopted here.

The bracken, *Pteris aquilina*, has most wonderful preservative powers. The peculiar odor of this fern, like many others, renders it repugnant to insect life, and must be familiar to every one who has wandered among them, especially in open land on the border of woods, where it luxuriates in the bright sunlight, so different from many of its order, that prefer shade and seclusion. This Pteris possesses, moreover, some subtile quality inimical to the growth of the varied fungi known as mould. Both the odor and the anti-fungoid qualities are said to emanate from a peculiar essential oil and resin which very probably render the fern distasteful to most insects. Bees have, however, been seen to suck the moisture exuding from the stems of the young, undeveloped fronds.

It is well known that essential oils prevent fungoid growths, as may be easily seen by mixing a few drops in a common flour paste, and they will keep it from mould sporules for a long time. It has been suggested that a frond of the bracken be boiled in the paste and it would answer the same purpose.

The above mentioned properties are so well known in Europe that they are taken advantage of in many ways. In the shops of fruiterers in London and Paris and elsewhere, apples and pears are packed in hampers containing fern leaves, the venders all asserting that they preserve the fruit fresh and good, and free from mould and decay. In the Isle of Man the bracken is in great demand for packing fresh caught herrings to be sent to the Liverpool market, and in Cheshire the farmers put up their new potatoes in hampers lined with bracken to send to Manchester and other cities.

The custom of keeping potatoes for winter in a "hog" or "bury" is general all over England. A large hole is dug and lined with straw and then filled with potatoes, a thick layer of the straw is also put over them and then covered with earth well sodded and packed down to keep out rain and frost. A gentleman who had been studying the qualities of the bracken recommended a farmer to line his "hog" with the fern instead of straw. The old fellow was skeptical about any new-fangled notion. So he made two "hogs," one with straw and the other with fern. The winter proved a very severe one, and when he opened out his potatoes he was disgusted to find that those in the former were so badly decayed they were not worth the trouble of removing, while the others were, to his great astonishment, good and sound. In Somersetshire they use bracken altogether for their "buries."

In many parts of Germany and Denmark beech leaves and bracken fronds are used to stuff mattresses and cushions. Fleas and bugs, the household pests of the poor people, they say, cannot exist in such beds. Would it not be well for our farmers' wives to try bracken for their mattresses in change for corn husks, and be free from their midnight tormentors? In some of the country places in France small beds are stuffed with fern for children affected with scrofula. In the Western Highlands of Scotland the cottages are thatched with bracken fronds, but in other parts only the strong stems are used that are bound on by ropes made of either birch bark or heather. The Scotch peasantry burn great quantities and sell the ashes to the manufacturers of soap and glass, and the thrifty housewives burn the dried fronds in their ovens, as it makes so quick and brisk a fire, especially for their oaten cakes, as it has no offensive qualities when well dried.

At Pont-y-Pool in Wales, where it grows most abundantly on the mountain sides, it is cut down in summer and burned in large heaps, then sprinkled with enough water to make the ashes adhere, rolled into small balls and sold in the market for its valuable alkali. The washerwomen prize it greatly, as it economizes soap. When used a ball is put in the fire till red hot, and then thrown into a tub of water, which in an hour becomes lye and is fit for use. Though the first frosts of autumn turn the bracken brown, it stands erect all winter without decaying. The hardy Welshwomen are often seen going out in sleighs to bring home loads of bracken. It is used as litter for the horses and mules employed on the tram roads, and is chopped up in their food also. When this fern is young it is greedily eaten by the far-famed Exmoor ponies, and donkeys delight in it. Swine also are fed by the cottagers in some counties on the boiled roots mixed in their wash, which is very serviceable in spring, when garden produce is scarce.

The bracken was put to a singular use in ancient times. In the Isle of Anglesea, North Wales, an urn was dug up many years ago containing the bones of a woman and child. Certain filaments were found adhering to the sides of the urn, and when microscopically examined they proved to be the remains of bracken fronds, that had evidently been used as a lining to the urn and covering for the bones. This fern grows in great abundance in the district where the urn was buried. In Normandy, France, the very poor peasants mix the succulent rhizomes with their bread in times of scarcity, and in Siberia they are used with malt when brewing beer. In some places it is used for dressing kid and chamois leather.

The bracken grows in every quarter of the globe. In North America it extends across Canada and is in every State of the Union as far as Mexico, south. According to locality it grows from one to ten and twelve feet high. If cut while green and left to rot on the ground, it improves the land and is very good for potatoes. Here the fronds are mostly tripinnate or winged. The name Pteris is derived from *pteryx*, a wing; and *aquilina*, from a supposed resemblance to a spread eagle, when the vessels in a transverse section of the underground stem are cut across. Everywhere legends linger round ferns—they sang of them in Eastern lore as emblems of secrecy and friendship; and the solemn Druids of old used them in their incantations.

Many kinds of ferns besides the bracken are eaten in India, especially by the hill tribes, but not as a staple article of diet, only as an accompaniment to other food. The *Asplenium nidus*, or birds' nest fern, is eaten in all the islands of the Indian Ocean, the young uncurled fronds being boiled in bundles like asparagus, and eaten as a salad. One of the *Polypodiums* mixed with barley and milk is used as a drink for persons recovering from inflammatory maladies. The common adder's tongue fern serves in the preparation of an ointment; a *Scolopendrum* as a pectoral and for spitting of blood; *Gleichinia* roots are full of fecula, slightly bitter and aromatic, and are used in Japan, Persia, and Australia for food. The poor of most nations seem to turn to ferns in some sort as a substitute for other lacking necessaries of life.

Many of these plants have astringent as well as aromatic properties, especially some of the *Adiantums*. From the Canadian maiden hair, sirup of capillaire is said to be made with an infusion of orange flower water and sugar. Not alone are ferns in use in modern days. In Pliny's time the frail stems of *Adiantums* received the name of *Cheveux de Venus*, and were used by ladies for strengthening and increasing the growth of their hair, and he tells how ladies beautified themselves by using some preparation of these dainty ferns as a cosmetic. I believe no poisonous plants are known in the order.

The Sandwich Islands have always been noted for their ferns, among others a *Cibotrum*, that grows very tall, and the foliage of the perfect ones, as they wave in the balmy winds, resembles an Oriental palm. From this noble tree the natives gather a soft, silky yellow substance resembling the finest merino wool, called *pulu*, and this they stuff their pillows and cushions with. A *Polypodium* is said to be of service in the preparation of cocoanut oil by the South Sea Islanders, and the bruised leaves of the fragrant *Angiopteris erecta*, also a graceful tree fern, are employed to perfume the oil.

Some of the *Blechnums* are used in making beer. The *Lastræa filixmas*, the male shield fern, is looked upon as a powerful vermifuge, for certain parasites of the human body. The Yakoots, of Siberia, take the fragrant wood fern, *Aspidium fragrans*, and make a decoction of it in place of more expensive Chinese tea. The *Asp. noveboracense*, the New York shield fern, has a sweet-scented variety, and if plants are taken and dried out of doors, they can be used to perfume a room, and the odor will last a long while.

The *Ceterach officinarum* cures affections of the chest; the down of *P. barometz* effectually stops hemorrhages; another of the Lastræas contains starch, saccharine matter, tannin, green fixed oil and resin. The rhizome has been used for tanning, and the ashes contain carbonate of potash.

One could go on *ad infinitum*, but enough has been said to prove of how much use the ferns are and have been. Truly one-half the world does not know how the other half lives—and it is very doubtful if doctors allow all the curative powers said by the natives of various nations to reside in ferns. I will only mention one more, viz., the *Osmunda regalis*.

This fine fern is well known as the "king fern." Several interpretations of the name are given from the old Saxon. Osmunda is said to come from Osmund, meaning "domestic peace," and the roots of the fern were boiled and put into some kind of liquor and given to those who were wounded or bruised. The name also signified mind and strength, in allusion to its invigorating qualities. A pretty legend is told of how it got the name of *regalis*. At the time the Danes were ravaging England, after burning the monastery of Avondale, they destroyed all the surrounding country. Osmund, the Waterman, took his beautiful wife and child to an island to hide them from the Danes. There were no caves, but the whole place was covered with this fern that grew very tall. He took provisions, and made mother and child lie hidden in the ferns while he went to help King Alfred to drive out the Danes. His arms at this time were successful and Osmund returned in triumph. When all had settled down again in peace, Osmund's fair child named the fern after her father and called it the king fern after Alfred. It is also said that the heart of the waterman may be seen in a section of the root.

Hops.

Census Bulletin 143 shows the production of hops for the year 1889 to be 39,171,270 pounds, grown upon 50,212 acres of land in seventeen States. The five leading States in the production of hops are:

	Acres.	Pounds.
New York	36,670	20,063,029
Washington	5,113	8,313,280
California	3,974	6,547,338
Oregon	3,130	3,613,726
Wisconsin	967	428,547

The aggregate production of these five States was 38,965,920 pounds, being 99·48 per cent of the entire crop of the United States. New York produced 51·22 per cent of the entire yield from 73·03 per cent of the entire acreage. California produced the highest average per acre, 1,648 pounds. Washington followed closely, with an average of 1,626 pounds, and Oregon stands third in rank with 1,155 pounds. New York produced an average per acre of 547 pounds, or less than one-third that of California, while Wisconsin, with 443 pounds, stands the lowest of the five hop-growing States. The value of the crop of the United States for 1889 was $4,059,697.

The crop of 1890 amounted to 36,872,854 pounds, which was worth $11,105,424, or nearly three times the value of the crop of the previous year. This great advance in value is due to the fact that the average price of hops in 1889 was about 10 cents per pound, while in 1890 it was over 30 cents.

Freckles.

Some people are born freckled and other have freckles thrust upon them. The former class might as well accept their freckles as a dispensation of Providence, for nothing can be done for them. The latter can always get rid of their affliction by using a couple of drachms of sal ammoniac with an ounce of German cologne, the solution mixed with a pint of distilled water. Applied two or three times a day, states one of our contemporaries, it will cure the worst case of acquired freckles on record.

© 1892 SCIENTIFIC AMERICAN, INC.

DR. S. P. LANGLEY'S EXPERIMENTS IN AERODYNAMICS.*

"So far as the mere power to sustain heavy bodies in the air by mechanical flight goes, *such mechanical flight is possible with engines we now possess.*" These words, coming as they do from the Secretary of the Smithsonian Institution, a gentleman who prominently represents the dignity of official science in this country, and who is everywhere recognized as a physicist of known reputation, carry with them a weight of authority. Nearly five years ago Prof. S. P. Langley, then the director of the Observatory at Allegheny, Pa., commenced there a series of experiments in aerodynamics, the results of which he has recently placed before the public, and of which we here give abstracts.

Mr. Hiram S. Maxim, inventor of the well known Maxim machine gun, has been conducting in England within the past two years experiments in some respects similar, and has independently and with remarkable coincidence reached some of the same important conclusions as Dr. Langley. The experiments common to each have been to determine the lifting power of inclined aeroplanes when driven horizontally through the air at high velocities. In the experiments of Mr. Maxim the aeroplane used had a spread of 12 feet, and was thus relatively large with respect to the radius (30 feet) of the circle in which it was moved. In Dr. Langley's experiments, though the whirling arm was of approximately the same length, the aeroplanes were designedly made so small that, for any small portion of their path, the whole would move approximately in a straight line, and the disturbing effects of centrifugal force be rendered quite negligible.

As only Dr. Langley's novel experiments and discoveries are as yet before the public in any detailed form, these only can here be particularly described. They were made with the object of taking nothing on trust, but of putting everything to the test of actual trial, even at the risk of superfluous experiment, and they were concerned with the scientific aspect of the subject rather than with the particular new art of aerodromics or air-running which they pointed to.

The whirling table which was used as an auxiliary in all the experiments (see engravings) consisted essentially of a horizontal arm thirty feet long, driven ordinarily by a 10 horse power engine, at varying speeds up to one hundred feet per second, or about 70 miles an hour, its rate of rotation being registered on a stationary chronograph, by the action of quadrant electric contacts placed around the axis of the revolving arm. The chronograph sheets, therefore, preserved a permanent exact record of the velocity of rotation for every revolution and quarter of a revolution throughout every series of experiments. By means of a series of step pulleys, all velocities at the end of the arm from rest up to this 70 miles an hour were actually attained in experiment. It was also possible by means of the reaction of the wind from a small propeller at the end of the arm to drive it independently of the engine, but the latter was generally used.

With this apparatus a number of different accessory pieces of mechanism were devised for measuring the power expended, and for recording resistances overcome while driving through the air aeroplanes placed at the end of the rotating arm. The subjects of investigation covered phases of pressure and resistance on inclined planes of different form, size, and weight, together with power necessary to sustain and propel them through the air.

The description may be inaugurated with an illustrative experiment giving one factor of demonstration. In this case a heavy metal plane was suspended from the movable horizontal arm by a spring balance, which, when all was at rest, was drawn out a distance corresponding to the weight. It had been a tacit assumption underlying the calculation of previous investigators that when such a plane surface was not only suspended, but also dragged along in rapid motion, the tension or strain would be increased, and that the spring balance would be drawn out still further. Applying this idea to the flight of birds, Navier and other eminent men of science had calculated that it would take nearly fifty times the power which a bird expended in sustaining its own weight in the air by hovering over one spot, to not only sustain the weight, but move it along in rapid flight; and on this very natural but erroneous assumption they reached the conclusion that it would take one-thirteenth of a horse power to sustain the flight of a model no bigger than a swallow, and by implication it followed plainly enough that no known mechanical power could be strong enough consistent with the necessary lightness to ever make a flying machine. In Dr. Langley's illustration, which is essentially an introduction to more demonstrative experiments, the heavy metal plane suspended by a spring from the motionless arm drew out that spring to a carefully noted distance by its dead weight; but, as soon as the whirling table was put in motion, and the plane was not only suspended but dragged along with the lateral movement, the spring was seen to *contract* more and more instead of lengthening, showing that the pull *diminished* with each increment of speed.

It does not appear that this experiment, simple as it is, has ever before been tried, though, as soon as it has been tried, the result is seen to be so immediate a consequence of a known principle that it is apt to appear self-evident and superfluous. It becomes evident, by Dr. Langley's experiment, that the faster the motion in the air the less is the pull, contrary to what is obtained in transport on land or in water. The faster the inclined plane goes, the more it tips forward, and the smaller is the effective resisting surface that it offers.

Now, since the power exerted is measured, not by the tension alone, but by the product of tension into the distance through which this is exerted in a given time, this experiment, while noteworthy for the simplicity of its illustration, proves only that one of these factors diminishes while the other increases, as higher velocities are attained, and is so far incomplete. But it suggested to Dr. Langley the inquiry whether the second factor might not increase less rapidly than the first diminished, so that the product of the two factors, stress and distance, namely, the *power* expended, might not also diminish with increasing speed, with the startling consequence that, except for friction with such heavy planes, the greater the horizontal speed, the *less* would be the power required to maintain it, a conclusion which, if reached, would be apparently paradoxical in its novelty and of far-reaching importance in its consequences.

So novel a conception as that there might exist a practicable mode of transport in which, through a wide range of velocities of horizontal motion, the greater the speed, the less the power required to maintain it, evidently demands the most convincing experimental demonstration. For this purpose a number of pieces of special apparatus were devised so as to test the fact, if true, and repeat the demonstration in numerous different ways. The first quantitative experiments were made with an instrument devised by Dr. Langley and called by him the "resultant pressure recorder" (see cut), for measuring the total normal pressure on an inclined plane moving in the air, and to examine an assumption made by Newton, which had stood in the way of previous investigators. This assumption (see Principia, proposition xxxiv, book ii) was that this pressure varies with the square of the sine of the angle between the surface and the direction of advance. From the results obtained by it, Newton's assumption is shown to be widely erroneous.

It has always been known that an inclined plane can be supported in the air by being pulled along on it, as a kite by its string, and it is theoretically possible that the kite could be moved without a string by propellers or other means worked by an engine, if the latter were light enough, in proportion to its strength, to be supported by the upward air pressure in question. By Newton's formula and Smeaton's constant of wind pressure, each square foot of a kite or plane held at the angle of five degrees with the horizon, and moved along at a rate of 35 miles an hour, would support, by the reaction of the air, a weight of only about one-twentieth of a pound. If the engine, then, weighed even an ounce for each foot of supporting surface, it could not sustain its own weight. One conclusion of the experiments with the Langley resultant pressure recorder was that Newton's assumption was wrong, and that in the supposed case the actual weight capable of being supported is twenty times as great as that so computed, while for smaller angles and better disposed rectangles the error is still larger. It followed, then, that if reasonably light engines could be built, what was before impossible now becomes possible; and to demonstrate that within certain limits the power required for horizontal flight actually diminished as the speed increased, a piece of apparatus called the "plane dropper" was devised (see cut). It is designed to show (1) that a horizontal plane falls slower in horizontal motion than when at rest; (2) to make actual measurements of the time of fall of variously shaped planes; (3) to determine for different angles of inclination the speed necessary in order to derive an upward thrust from the air just sufficient for sustaining the planes.

With this apparatus, with planes horizontally disposed, a plane 36 inches long, 4 inches wide, and of 1 pound weight, was driven horizontally in the direction of its width. When allowed to fall from rest, the time of falling was 0·53 second, the retardation due to the resistance of the air being 0·03 second. When driven forward through the air, the time of fall increased until with a velocity of 66 feet per second (45 miles an hour) the time of fall was 2 seconds. The results with the planes inclined at various angles are presented in Dr. Langley's memoir in graphic curves which show at a glance, for the differently shaped planes used, the speed necessary in order that they shall be supported in the air at angles of inclination ranging from 2° to 30°. The resistance of these planes to advance while thus supported, and the horse power necessary for maintaining the motion, are derived from the preceding experiments. These results confirm by experimental demonstration, up to velocities of 50 miles an hour, the proposition of which the first experiments with the suspended plane gave a prevision, namely, that in the horizontal flight of an aeroplane it takes less power to maintain a high speed than a low one.

For further demonstration an entirely different instrument, called the component pressure recorder, (see cut) was next devised. This instrument gave a direct measurement of the horizontal resistance to the inclined planes while being driven through the air with speeds at which the vertical pressure of the air sustained the weight ("soaring speeds"), and the motion became as if they were entirely free from support or constraint. A long series of experiments was made with this apparatus in which hundreds of observations were obtained, the quantitative data of which render the conclusions very striking. Dr. Langley observes: "Since effective steam engines have lately been built weighing less than 10 pounds to one horse power, and the experiments show that if we multiply the small planes which have been actually used, or assume a larger plane to have approximately the properties of similar small ones, one horse power rightly applied can sustain over 200 pounds in the air at a horizontal velocity of over 20 meters per second (about 45 miles an hour), and still more at still higher velocities."

Having determined the power necessary to be expended in driving forward differently shaped aeroplanes, at soaring speeds, methods and apparatus were devised for investigating the efficiency of propellers in furnishing the end thrust shown to be requisite. This is accomplished by means of the "dynamometer chronograph" (see cut) used in connection with the component pressure recorder. The former instrument is a complete, self-registering dynamometer (placed at the end of the arm of the turntable with the propeller), which gives indicator diagrams, showing the amount of power expended in driving the propeller and the return in end thrust which this gives back. The power for driving was furnished by a small electro motor, located on the rotary arm, but actuated by a stationary dynamo. For this experiment, it is necessary that the propeller shall drive itself through the air at high speeds, while attached to the heavy, massive arm of the turntable, this latter offering a resistance out of all proportion to that of an aerodrome, such as the little propeller is adapted to drive. In the auxiliary use of the component pressure recorder, mounted at the end of the great whirling arm, Dr. Langley has overcome this last difficulty. The instrument has an arm of its own, six feet long, susceptible of oscillation about a vertical axis. Upon the end of *this* arm is placed the dynamometer and propeller, and the whole is set in motion at a high speed by the rotation of the great whirling arm. Then the propeller is actuated by the dynamo at increasing speeds, until its end thrust is so great as to actually begin to drive it ahead of the turntable, this critical instant being observed and recorded by the motion of the recorder's arm about the vertical axis. At this instant, then, the propeller and its aeroplane are no longer being carried forward by the turntable, but the propeller is driving itself ahead independently of it, but at exactly the same speed. The product of this speed by the end thrust, measured on the dynamometer, furnishes the performance of the propeller, and when compared with the power expended, shows its efficiency.

This is an outline of the principal steps in the investigations. Dr. Langley concludes his memoir with the following words: "I am not prepared to say that the relations of power, area, weight, and speed, here experimentally established for planes of small area, will hold for indefinitely large ones; but from all the circumstances of experiment, I can entertain no doubt that they do so hold far enough to afford assurance that we can transport (with fuel for a considerable journey and at speeds high enough to make us independent of ordinary winds) weights many times greater than that of a man. In this mode of supporting a body in the air, its specific gravity, instead of being as heretofore a matter of primary importance, is a matter of indifference, the support being derived essentially from the inertia and elasticity of the air on which the body is made to rapidly run. . . . . I wish, however, to put on record my belief that the time has come for these questions to engage the serious attention, not only of engineers, but of all interested in the possibly near practical solution of a problem, one of the most important in its consequences of any which has ever presented itself in mechanics; for this solution, it is here shown, cannot longer be considered beyond our capacity to reach."

ACCORDING to Dr. H. A. Kelly, permanganate of potassium and oxalic acid are harmless to the hands and are germicidal. Soap and water plus the permanganate of potassium and oxalic acid are the only true germicides, and the best disinfectants we possess to-day.

---

*In the preparation of this article the editor has been placed under obligations to Mr. George E. Curtis, of the Smithsonian Institution, who has exhibited apparatus and placed at his disposal the literature of the subject. Among the latter the following have been freely consulted: "Recherches Experimentales Aerodynamiques et donnees d'experience," S. P. Langley, extracted from *Comptes Rendus des seances de l'Academie des Sciences*, seance du 13 juillet, 1891; small 4to, 4 pp. "Experiments in Aerodynamics," S. P. Langley, *Smithsonian Contributions to Knowledge*, 801, Aug., 1891; large 4to, 115 pp., 10 plates. "The Possibility of Mechanical Flight," S. P. Langley, *Century*, Sept., 1891; 3 pp. "Aerial Navigation; the Power Required," Hiram S. Maxim, *Century*, Oct., 1891; 5 pp., illus.

© 1892 SCIENTIFIC AMERICAN, INC.

THE ELECTRICAL TRANSMISSION OF POWER BETWEEN LAUFFEN ON THE NECKAR AND FRANKFORT ON THE MAIN.

Among the many important exhibits at the recent Frankfort Electrical Exposition, a prominent place was given to the arrangements for the transmission of power between Frankfort and Lauffen. It formed the main feature of the exhibition, and is an important step in the development of electricity.

As is well known, we understand transmission of power to mean the methods which utilize the electric current for carrying any energy—whether derived from coal, from falling water, from the force of the wind, or from the ebb and flow of the tide—any required distance.

If, for instance, the energy of great waterfalls is to be transmitted, the following arrangement is usually employed: By means of turbines the falling water is made to drive the queen of all mechanisms, the dynamo; the latter generates electricity, which is carried to a distant station by wire conductors. There it enters a second dynamo, causing the movable part, the armature, to operate. In this way machinery can be driven or the electric current can be used for lighting, etc.

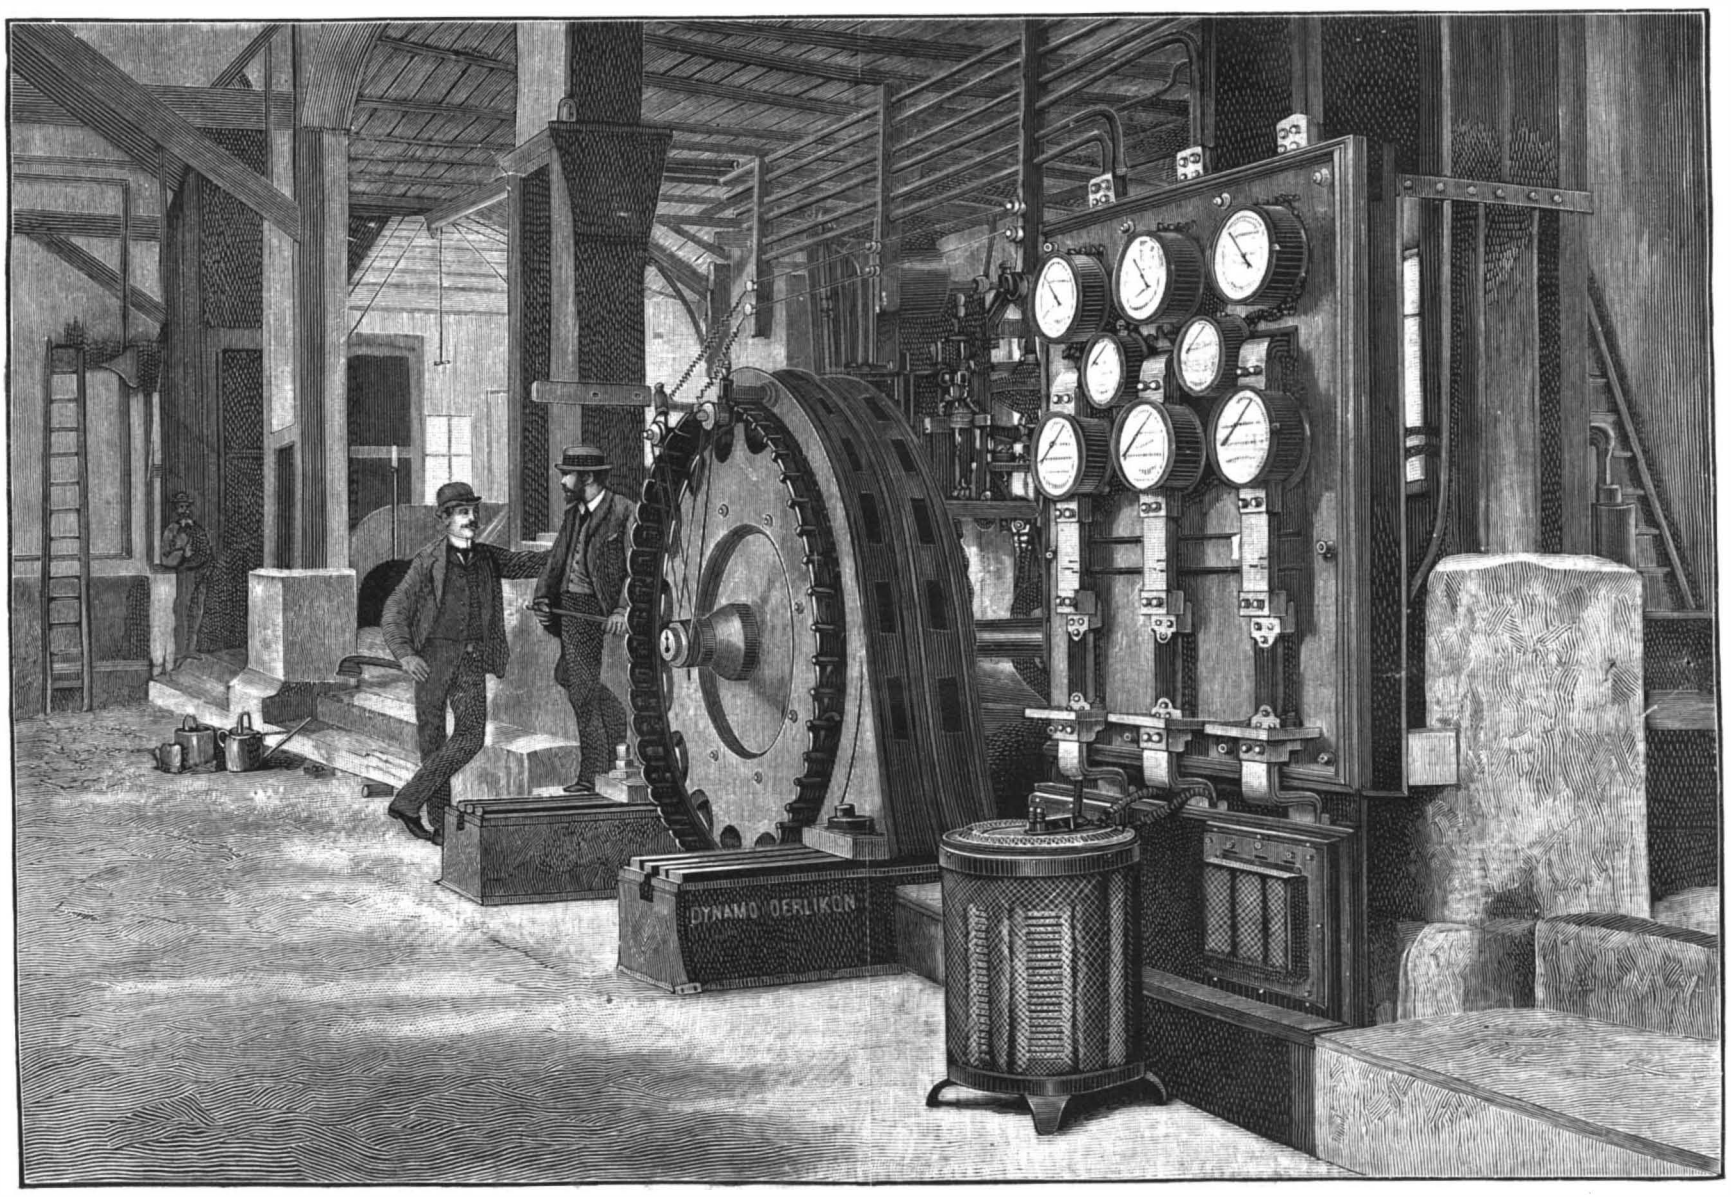

ELECTRICAL TRANSMISSION OF POWER—PRIMARY STATION AT LAUFFEN ON THE NECKAR—ROTARY CURRENT DYNAMO FROM THE OERLIKON WORKS.

The transmission of power over such long distances is a new thing for the electrician, and from it he has gained the idea of utilizing the water power which is supplied so abundantly by nature in some countries—as, for instance, in Switzerland—throughout whole districts, and at great distances from the source. A notable instance of this was the transmission of the energy of Niagara Falls to Buffalo, a distance of nineteen miles. The last obstacles to work of this kind have been removed by the achievements of the Frankfort Exposition, by which a force of falling water equal to 300 h. p. is transmitted a distance of about 108 miles to Frankfort, and the experiment has proved a brilliant success.

Connected with the realization of this plan there are a great number of important innovations, to which we will briefly refer.

Dynamo machines generate two different kinds of currents according to their construction: the continuous current and the alternating current. The continuous current machine, which generates a current that flows continuously in one direction, has surpassed, in many respects, its sister, the alternating current machine, the impulses of which change their direction many times in a minute. When the direct current is used for the transmission of power a conductor having a special cross section is required, but, although the alternating current is much more economical in this respect, it has not been possible heretofore to utilize it for driving motors. To the direct and alternating current already described has lately been added the rotary current, which is generated by a dynamo in which the field magnet rotates. Its discoverer is the Italian Professor Ferraris, of Turin, and among the constructors who have brought it into notice by building practical machines, we will mention the following engineers: Tesla, Hasselwander, and Von Dobrowolsky.

The rotary current may be described as a system of connected alternating currents of different phases. The invention of the rotary current motors makes it possible to use also the economical alternating current for driving motors. On the Lauffen-Frankfort line about 300 h. p. have been effectively transmitted by means of an alternating current of very high tension (30,000 volts), and this energy is applied by means of the new rotary current motors. This striking experiment can scarcely have been tried before. The entire cost is about $20,000. The three conductors which carry the current to Frankfort have a total length of about 310 miles, and about 13,200 lb. of copper were used in their manufacture; 1,500 lb. of oil are used for filling the insulators over which the conductors pass. All this goes to prove that the technologist is now prepared to transmit strong currents over great distances, bringing the power which is now wasted in regions remote from the channels of trade to the machinery which is busy in the service of man in the large cities. —*Ueber Land und Meer.*

Areas for Chimneys.

The old rule about chimneys was that they ought to have the flue tapered to the top, on the theory that, as the hot gases in them ascended, they cooled, and, in cooling, contracted; and that it was important to reduce the size of the flue in proportion to the reduction in volume of the gases, as otherwise cold air from the top would descend to fill the vacancy left by the contraction of the gases, and the draught would be checked. Reasonable as this theory seemed, practice has shown that cylindrical boiler or furnace flues are at least as good as the tapered ones, and within a few years practical engineers and architects of experience in such matters have inclined to make them slightly larger at the top than the bottom, the increase in diameter being, perhaps, half an inch to ten or twelve feet. Recently, a Swiss engineer has made experiments to see whether the facts bear out the old rule or support the more modern practice. To make the test, he built a chimney over a furnace grate, the stack having two flues. One flue tapered upward and the other downward, and the flues opened side by side over the grate, with openings of the same size. On lighting a fire on the grate, with unlimited access of air under it, the smoke was seen to issue nearly equally from the top of both the flues, but with an unmistakable preponderance in favor of the flue which enlarged toward the top. On partially shutting off the access of air to the fire, the difference became much more marked; the current in the flue tapering upward diminished, and finally stopped altogether, the smoke finding its way entirely through the flue with the wider top.—*The Builder and Decorator.*

The Ruling of Diffraction Gratings.

A word should be said as to the difficulties of ruling gratings which may explain why so many orders for gratings remain unfilled. It takes months to make a perfect screw for the ruling engine, but a year may easily be spent in search of a suitable diamond point. The patience and skill required can be imagined. Most points make more than one "furrow" at a time, thus giving a great deal of diffused light. Moreover, few diamond points rule with equal ease and accuracy up hill and down. This defect of unequal ruling is especially noticeable in small gratings, which should not be used for accurate work. Again, a grating never gives symmetrical spectra; and often one or two particular spectra take all the light. This is of course desirable if these bright spectra are the ones which are to be used. Generally it is not so. It is not easy to tell when a good ruling point is found, for a "scratchy" grating is often a good one, and a bright ruling point always gives a "scratchy" grating. When all goes well, it takes five days and nights to rule a 6 inch grating having 20,000 lines to the inch. Comparatively no difficulty is found in ruling 14,000 lines to the inch. It is much harder to rule a glass grating than a metallic one; for to all of the above difficulties is added the one of the diamond point continually breaking down. For this reason, Professor Rowland has ruled only three glass gratings. One of them has been lost, and the other two are kept in his own laboratory. These two were used by Dr. Bell in his determination of the absolute wave length of the *D* lines.—*Joseph Sweetman Ames, in Astronomy and Astro-Physics.*

ACCORDING to the report of the statistician of the Interstate Commerce Commission, the total number of persons reported killed on the railroads of the United States during the year ending June 30, 1890, was 6,334, of whom 2,451 were employes, 286 were passengers, and 3,597 were classed as "other persons," the last class including suicides. The total number reported injured was 29,025, of whom 22,394 were employes, 2,425 were passengers, and 4,206 were unclassified.

During the year 369 employes were killed and 7,842 injured in coupling and uncoupling cars. There can be no doubt that a large proportion of these fatalities and injuries would not have occurred if automatic couplers had been in universal use.

© 1892 SCIENTIFIC AMERICAN, INC.

CALIFORNIA'S FAMOUS BIG TREES.

In some twenty irregular groups, extending through a distance of about two hundred miles on the western slope of the Sierra Nevadas, from Calaveras through Tulare County, California, are found what are known as the famous "big trees" of California, one of which forms the subject of our illustration, and, wonderful to relate, although a passageway has been cut through it through which stages regularly pass, the tree still lives. This tree is in the Mariposa grove, and is 28 feet in diameter. A still larger tree in the same grove is known as the "Grizzly Giant." It is 34 feet in diameter. The highest of these trees is in the Calaveras grove, and it is 325 feet high.

This tree, the *Sequoia gigantea*, should not be confounded with the California redwood *Sequoia sempervirens*, a tree which quite frequently reaches a diameter exceeding 15 feet and a height of 300 feet. The largest specimen of this tree is seven miles south of Santa Cruz; it is 20 feet in diameter and 366 feet high. The redwood is found from the boundary of Mexico northward, forming vast forests upon the Coast Range of mountains, never very far from the Pacific. The wood is light and close grained, much resembling red cedar in appearance; it splits with remarkable facility, is eminently durable, and is used for building purposes, cabinet work, and almost every variety of general wood work, forming the principal staple of the California lumber trade.

With such abundant supplies, therefore, of one of the finest varieties of lumber, it seems something more than a pity, but rather a matter calling for severe criticism, that the lumbermen should be permitted to destroy, as they are doing, with a few exceptions, these groves of *Sequoia gigantea*. These trees grow nowhere else in the world, and their beauty, grandeur, and marvelous age combine to make them objects of such surpassing interest that the folly and neglect of the government in permitting their present destruction will pass the comprehension of succeeding generations. The Calaveras grove, north of Yosemite valley, is still untouched, and the Mariposa grove, thirty-five miles south of the valley, is safe, because included in the Yosemite grant, but the Fresno Flats grove, the next one in the belt, is a scene of destruction. It belongs to the California Lumber Company, of San Jose. Their policy has been to slaughter the trees without regard to age or size, beauty or grandeur. This was once one of the most beautiful of the groves, but to-day it is a pitiful wreck. Giants of the forest, fifteen, twenty, and thirty feet in diameter, lie on the ground in every direction. The largest trunks, those that are too large to be handled easily with the saw, have been shattered with blasting powder. Stumps of the trees, six, ten, or a dozen feet high, are all about, an army of witnesses to the malevolent avarice of men. Occasionally there is a mighty tree still standing, with a great gash, perhaps five feet deep, cut and sawed into one side. This grove has been almost annihilated. When the company cleans up the trunks and limbs that now cover the ground, its work of destruction will be just about completed. It has been engaged on this grove for a number of years, and has turned its attention almost entirely to the sequoias.

If the big tree lumber brought higher prices than any other sort, the zeal which is shown in the destruction of the groves could be understood. But it rates no higher in the market than the sugar pine, with which the mountain slopes are densely covered. The lumber companies could have made just as much money and been at no expense for blasting powder if they had let the big trees alone and turned to the sugar pines.

In the groves further south the same scene is repeated time after time. In that portion of the sequoia belt between the north and south boundaries of Tulare County alone there are at least ten mills, every one of which is industriously working away at the big trees. Their owners evidently fear that the national government will some day awaken to the wisdom of throwing protection around these unique groves, and they are determined to get just as much money out of them as possible before that day comes.

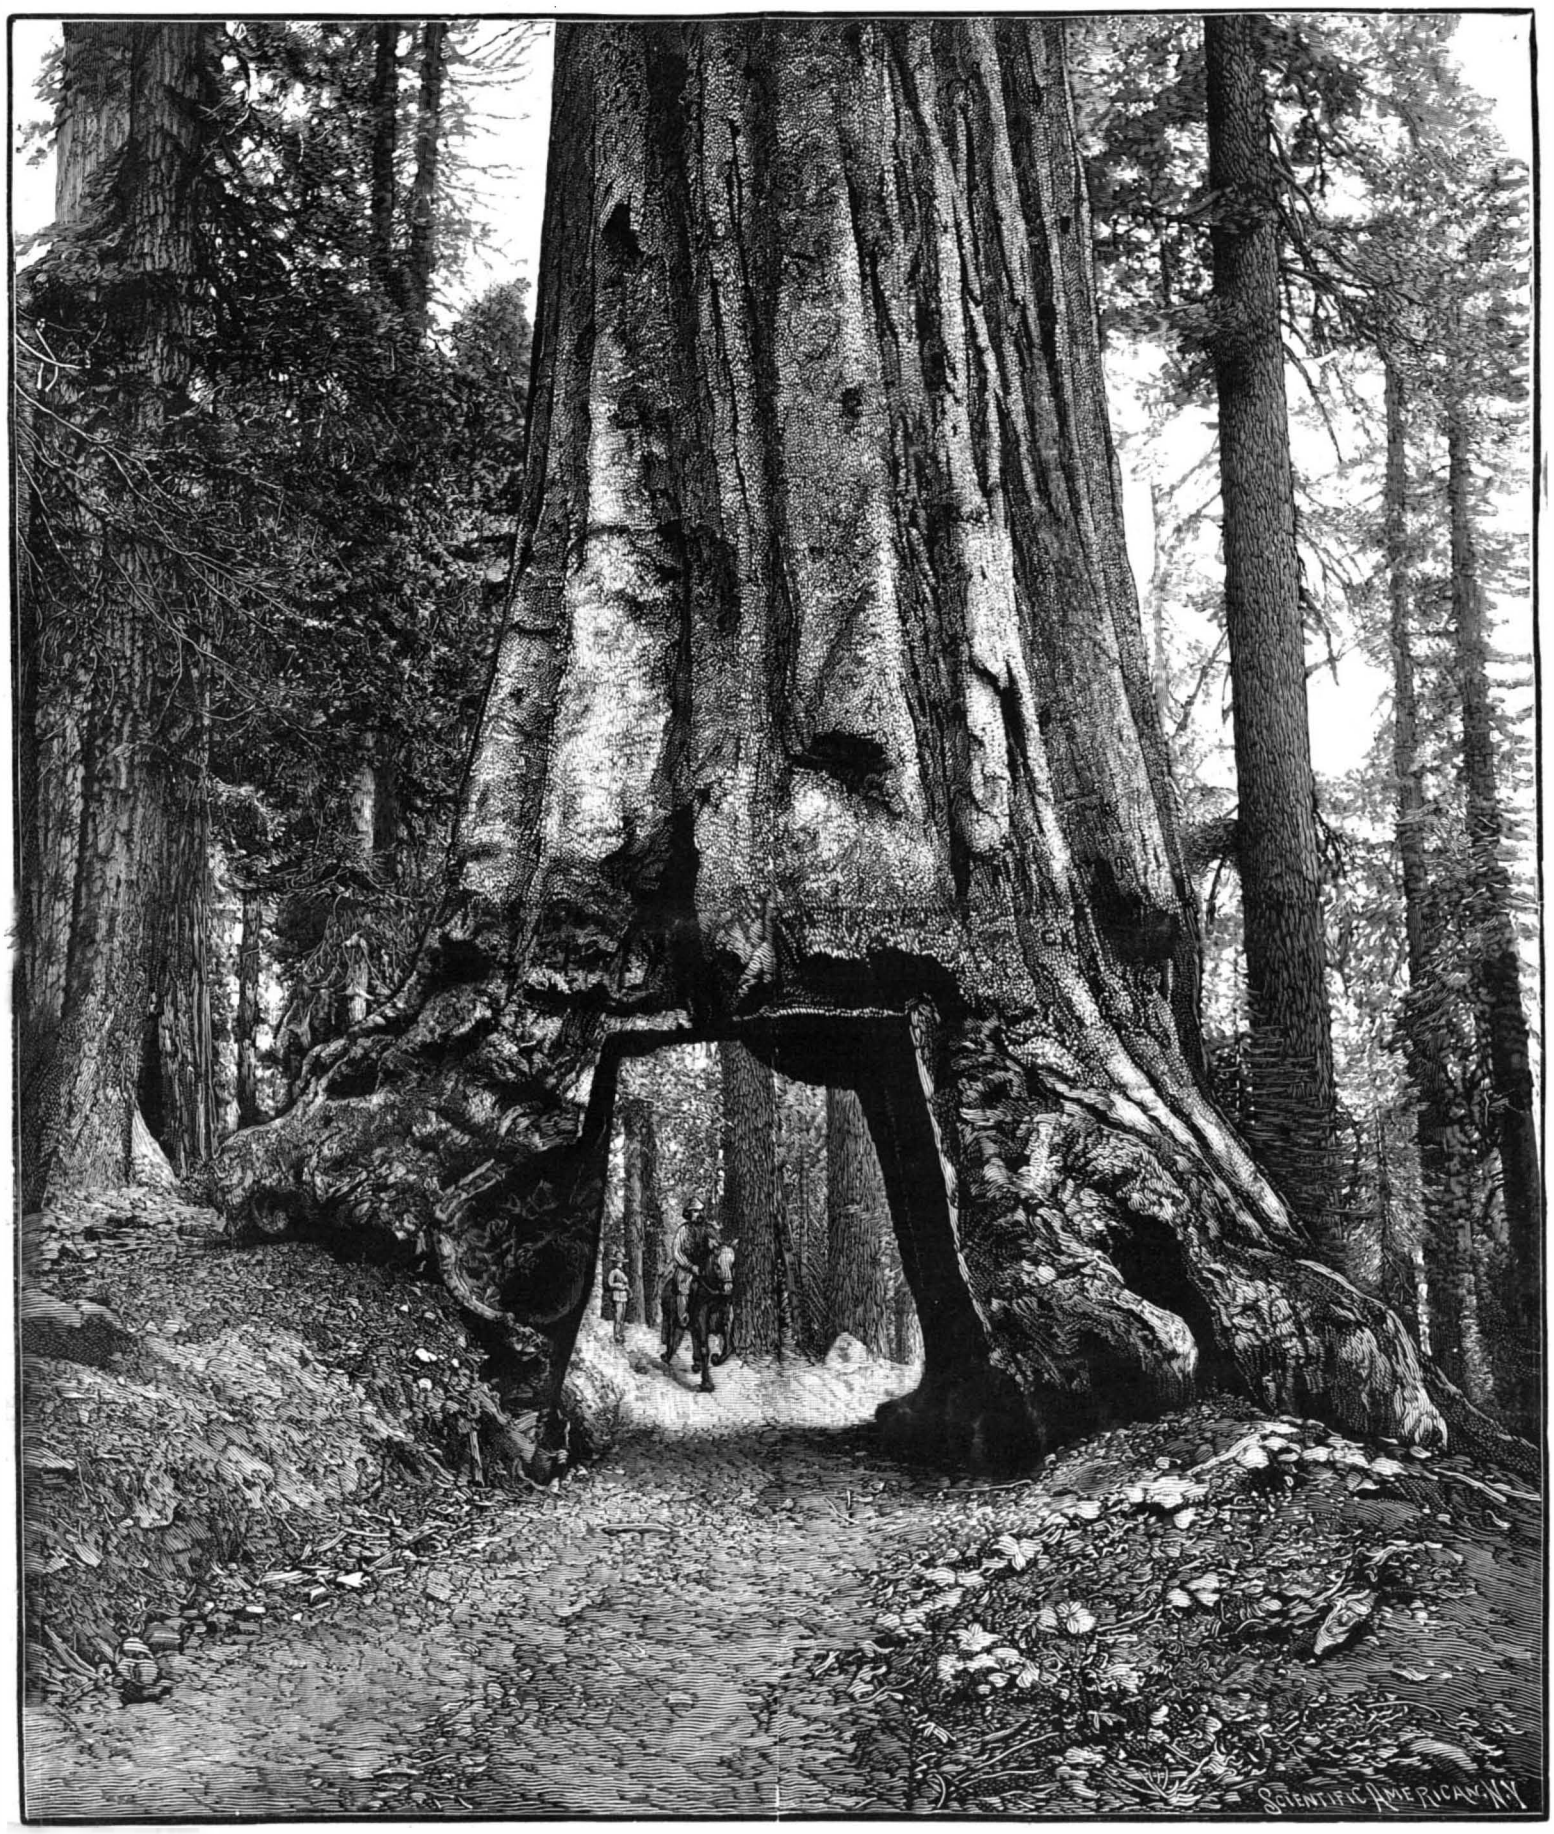

THE TREE "WAWONA" (SEQUOIA GIGANTEA) IN MARIPOSA GROVE, CAL.

In the Fresno grove, which is on the line between Fresno and Tulare Counties, the General Grant National Park preserves a few of the big trees. It is only a square mile in extent, and does not include the whole of the grove. The rest of it is rapidly disappearing. A little to the southeast the Sequoia National Park includes the North Kaweah and South Kaweah groves, which were withdrawn from sale in time to save them from destruction. Through the remainder of the groves one comes upon the same scene again

© 1892 SCIENTIFIC AMERICAN, INC.

and again. Everywhere ax, saw, and blasting powder are doing their detestable work with speed and thoroughness.

It has been proposed to extend the boundaries of the Sequoia Park so that it will embrace all the sequoia groves in Tulare County and cover the mountain slope from the summit of the Sierras nearly to the lower timber line. If the proposition included the whole belt of the sequoias from the most northern grove to the most southern tree, it would be still more heartily approved by all those—excepting always the mill owners—who have visited the groves and know how hopeless is their preservation in any other way.

For an excellent photograph from which our picture is made we are indebted to Mr. I. West Taber, a Yosemite commissioner, of No. 8 Montgomery Street, San Francisco.

Allotropism in Alloys.

In his presidential address before the chemical section of the British Association, Prof. Roberts Austen spoke of the consequences of allotropic changes which result in alteration of structure as being very great. The case of the tin regimental buttons which fell into a shapeless heap when exposed to the rigorous winter of St. Petersburg is well known. The recent remarkable discovery by Hopkinson of the changes in the density of nickel steel (containing twenty-two per cent of nickel) which are produced by cooling to 30 deg. affords another instance. This variety of steel, after being frozen, is readily magnetizable, although it was not so before; its density, moreover, is permanently reduced by no less than two per cent by the exposure to cold; and it is startling to contemplate the effect which would be produced by a visit to the arctic regions of a ship of war built in a temperate climate of ordinary steel, and clad with some three thousand tons of such nickel steel armor; the shearing which would result from the expansion of the armor by exposure to cold would destroy the ship. The molecular behavior of alloys is, indeed, most interesting. Mr. W. Spring has shown, in a long series of investigations, that alloys may be formed at the ordinary temperature, provided that minute particles of the constituent elements are submitted to great pressure. Mr. W. Hallock has recently given strong evidence in favor of the view that an alloy can be produced from its constituent metals with but slight pressure, if the temperature to which the mass is submitted be above the melting point of the alloy, even though it be far below the melting point of the more easily fusible constituent. A further instance is thus afforded of the fact that a variation of either temperature or pressure will effect the union of solids.—*Popular Science Monthly.*

The First Locomotive Run in America.

It was in 1829, the same year in which Stephenson, with his Rocket, demonstrated the practicability of rapid steam traction on railways. The engine was named the Stourbridge Lion. It was made in England and imported by the Delaware and Hudson Canal Company, and designed to draw coal from their mines in Carbondale to the head of their canal in Honesdale, Penn. On its arrival, it was placed on the railway and run from Honesdale to Seeleyville, a little over a mile. It was found to be too tall to go under a highway bridge over the track at that place, and was reversed and run back to Honesdale. All parts of the railway above the surface of the ground were built on trestles, and the heavy engine racked them so much as to endanger safety. For these reasons the locomotive was set off by the side of the track, and a board shed built over it. The railway was planked, and horses employed to draw the cars. The engine stood there safe for several years.

The writer was personally acquainted with these facts. Two men who rode on that trip are living at this time.

In 1840 and 1841, while I was a student in the Honesdale Academy, I found the boards on one side of the shed torn off and the engine exposed to view. I spent many hours in trying to study out its mechanism and movement. No published description of a steam engine was then within my reach. The Stourbridge Lion had four wheels, three or three and a half feet in diameter, and the boiler rested directly on the axles. The cylinders were vertical, one on each side of the boiler near the hind wheels. There were two heavy iron walking beams a few feet above the boiler, and to one end of each a piston rod was attached by Watt's parallelogram. The other ends of the beams were joined by swinging rods to cranks at right angles to each other on the forward wheels. There was no whistle or bell, I think. The engineer stood on a small platform behind the boiler.

Soon after 1841, the engine began to be carried off piece by piece, mostly by blacksmiths and machinists; and I am told that only one small piece of the iron is now in existence in its primitive form. If the engine had been kept intact, it would be worth almost its weight in silver for exhibition in Chicago in 1893.—*M. H., Science.*

Modern Progress in Naval Engineering.

Sir Edward J. Reed, in a recent address to the Junior Engineering Society, said:

Prior to 1863, the consumption of fuel in H. M. ships was 4 pounds per I. H. P. per hour. In the case of the Sultan it was 1½ pounds when developing the full power with forced draught. Now, a vessel with the old type of engine, weighing 920 tons, would develop about 4,900 I. H. P., and burn in four days of her fullest steaming 840 tons of coal. The total weight which her designer had to provide for was 1,760 tons, to enable her to develop say 5,000 horse power for four days continuously. But in the case of the modern vessel, just before referred to, if her indicated horse power were to be the same, viz., 5,000, the weight of her machinery would only need to be one-twelfth of this, say 420 tons, and this with the same aggregate weight of machinery and fuel (viz., 1,760 tons) would leave 1,340 tons available for fuel. But her consumption would be only 80 tons per day, so that she would carry fuel enough to steam for no less than 16 days at the fullest speed, or more than four times the time, and therefore more than four times the distance over which the earlier vessel could have steamed. During the period over which my own responsibility for large steamships extends, I have, therefore, seen the steaming power multiplied more than fourfold.

This single illustration furnishes, I think, so striking an example of recent progress that it will not be necessary for me to trouble you with references to the many other examples of like nature with which marine experience abounds, otherwise I might adduce, as one of the most interesting among them, that elfish creation (due to the genius and perseverance of Mr. Thornycroft) the swift torpedo boat, which animates the military harbors of the world by its lightning-like movements. In this case we have developed to a degree never dreamed of until quite recent years the principle of securing a very large development of power with a very small weight of machinery, by means of an immense number of revolutions.

These are some of the things which were before me, although but dimly seen, if seen at all, when I commenced my public work. What may not be before you who are now of the age that I was then? I remember that many years ago, when presenting prizes to the Science School at Liverpool, I pointed, as to a dream that might be realized, to the possible reduction of weight of material in a vessel and her machinery so great in amount as to provide for the complete lifting of the vessel to be propelled above the surface of the water, by means of a set of propellers with inclined axes, which should simultaneously elevate her and force her head through the air only. I admit that, notwithstanding the great advances in this direction to which we have just been attending, we are still far from this result; but I for one am satisfied that we are advancing rapidly toward a time when the transformation which steam and steel and electricity have already effected will be looked back upon as but the initial stages of the transformations that are to come, and are to come soon.

Roads in France.

The excellence of French roads is well known. The United States consul at Bordeaux describes how they are made. The materials are brought from the nearest quarries and placed at either side of the route surveyed. In order that the full amount contracted for may be delivered, the stone must be heaped in angular piles of prismatic shape and fixed dimensions. These heaps, placed at a given distance from one another, are afterward visited by an official inspector, and must in all instances fit exactly beneath a skeleton frame carried by him. The material is usually marble, flint, stone, or gravel, and whatever is used must be of the best quality and cleansed from all foreign substances. The stone must be broken so that each piece may pass through a ring 2½ inches in diameter. It is then spread evenly over the road, the interstices being carefully filled in with smaller pieces, so that the whole is smooth and free from abrupt eminences and depressions. A steam roller then crushes and further evens the whole, after which a superficial layer of clay and earth completes the work. Roads are classed as national roads, which are the main arteries of the system connecting most distant parts of the country, and are constructed and maintained by the government; department roads, which connect different points of the same department or of two adjoining departments, and are constructed and maintained by the department; highways and public roads, which are the property of the commune through which they run, but are in practice made and repaired by the department from taxes levied on the commune, supplemented by a department subsidy; cross roads, which are maintained by sums derived from the ordinary revenues of the commune, occasionally supplemented by additional taxation; and country roads, which are kept in order by the commune, except they are injured by unusual traffic, when an indemnity may be claimed by the communal administration. For the purpose of maintaining the common roads the inhabitants living in the district are obliged to work three days in each year or pay an amount equivalent to the compensation of a laborer for three days. The consul at Havre says that French pavements increase in excellence with age. In France, he says, all roads have perpetual attention. If from weight, rain or other causes a hollow, rut or sink is formed, it is repaired at once. Where the space to be repaired is of limited area, the rolling of the new coating is left to the wide tires of the heavy carts, but in the case of extended areas a steam roller is brought into use. Every carrying and market cart in France is a road maker instead of a rut maker, for it has tires usually from 4 inches to 6 inches in width.

The Meeting of Jupiter and Venus.

Everybody must have noticed during the past few weeks the gradual drawing together of the brilliant planets Jupiter and Venus. Outshining all the other stars, they have added greatly to the beauty of the evening sky. During the present week they will continue to approach one another, until on Saturday morning, February 6, they will be so close that to the naked eye they will actually seem blended into one. Unfortunately the hemisphere of the earth which we inhabit will be turned away from the place they occupy in the sky at that time, so that we shall be unable to witness this interesting conjunction. But on Friday evening the two planets will already have drawn so near together that their aspect will be that of a most splendid double star.

The observer will notice at once the unquestionable superiority of Venus to her giant brother in brilliancy. This, of course, is an effect of distance, for although apparently so near together that they almost touch, the two planets are really more than four hundred millions of miles apart, their conjunction in the sky arising simply from the fact that Venus, in swinging around its orbit, happens to come almost exactly into the line of sight from the earth to Jupiter. Jupiter is more than 1,400 times as large as Venus, and if it were really placed side by side with Venus, would be at least 130 times as bright as the latter is. In short, it would resemble a small but dazzling moon.

But it is only when one considers what these two planets are that the true interest of this week's celestial spectacle is developed. They represent respectively the two great types or groups into which the sun's family of worlds may be divided—the terrestrial group, whose members, like the earth, are of comparatively moderate dimensions, while th faces have become cool and encrusted with a d, on which a great variety of life flourishes, y flourish, and the Jovian group, to adopt a name from their greatest representative, Jupiter, in which a much earlier stage of planetary development evidently exists, so that their surfaces have not yet cooled down or assumed a permanent form. These half-developed globes are all of gigantic dimensions and low specific gravity.

During the past year Jupiter has shown signs of tremendous disturbance in the dense cloudy atmosphere by which it is surrounded, and the fact has been noted that such disturbances upon Jupiter show a tendency to coincidence with the return of the maximum sun-spot period. Just now the sun is becoming from month to month the scene of more violent activity than it has displayed since 1883 or 1884, and at the same time the great belts and spots upon Jupiter brighten and glow with color, and exhibit changes of wonderful rapidity and variety. We cannot yet precisely interpret the processes of world making which are going on there, but they are intensely interesting to watch.

Venus, too, attracts particular attention just now, because observations to be made during its present visit to our side of the sun may settle the question that has been raised as to the correctness of Schiaparelli's conclusion, announced less than two years ago, that Venus always keeps one side turned sunward, or makes but one rotation on its axis in the course of a revolution around the sun. If this strange state of things really exists upon a planet whose size entitles it to be called the twin of the earth, so many consequences follow bearing upon the question of its habitability, that there is hardly any direction in which investigation and discovery could prove more fruitful and interesting.

They are in every way a wonderful pair of planets which now attract all eyes to the sunset sky.—*N. Y. Sun.*

Coloring for Glass.

A substance apparently used for imparting a yellow color to glass had the following composition:

Moisture	1·71
Carbon	29·96
Silica	10·65
Ferric oxide and alumina	4·38
Manganese dioxide	37·92
Sodium chloride	13·55
Sulphuric acid	0·22
Magnesia	0·23
Lime, traces of baryta, and loss	1·38

It is probably compounded of 45 parts of graphite, 41 parts of pyrolusite, and 14 parts of common salt.—*G. Hattensaur, Chem. Zeit.*

© 1892 SCIENTIFIC AMERICAN, INC.

TROUVE'S AVIATOR.

At one of the August sessions of the French Academy of Sciences, Mr. Gustave Trouvé presented a memoir, the principal object of which was to show what motor, in order to solve the question of aerial navigation, is best qualified to simultaneously fulfill those two conditions of great power and extreme lightness which are so difficult to reconcile, and which, nevertheless, are strictly exacted by the very nature of the problem.

In the first place, after discussing their value, Mr. Trouvé eliminated steam motors, electric motors, accumulators of energy, such as rubber and steel, and compressed air and gas motors, since none of them completely answered the questions and none of them fulfilled the desired conditions. There does not to-day, added he, exist any motor provided with its accessories, generator and propeller, that we can immediately employ, or at least complete for the object proposed. Now since the generator and propeller are both absolutely necessary, and consequently cannot be done away with, Mr. Trouvé has conceived the idea of merging them into the motor and of thus creating a new organism dependent upon itself, which he has named a "generator-motor-propeller." This organism is constituted through the aid of the well known Bourdon tube, the essential part of the manometer of the same name. Electricity plays merely a secondary although necessary role in it.

We know that if the pressure of the gas that this tube contains increases, the tube bends and tends to spread its branches, but if the pressure decreases, on the contrary, the phenomenon is reversed and the branches approach each other. If, then, through any means whatever, we cause a series of alternately condensed and dilated pressures in the interior of the tube, the latter will undergo a series of oscillations, of powerful vibrations, utilizable as a motive power. For the purpose of still further increasing the energy of the tube, and also for diminishing the volume of the chamber in which the explosions of the detonating mixture take place, Mr. Trouvé has fitted in the interior a second tube similar to the first. This addition increases the elastic force of the gases engendered, and, at the same time, diminishes the consumption of the combustible. To the vibrating extremities of the tube are fixed directly, but with a rotary motion, the wings, A and B, of the apparatus, so as to suppress all intermediate frictional or rotary transmission gearings. The lowering of the wings corresponds to the condensed pressures, and their elevation to the dilated pressures. The chemical combination utilized is the oxidation of hydrogen. This gas is easily and quickly obtained in large quantity, even in a pure state, and oxygen, its combustive, is found already prepared, so to speak, in the atmosphere. The artificial bird (or aviator-generator-motor-propeller as the inventor styles it), like the genuine bird, thus draws a large part of its aliment from the air. The detonating mixture is regulated at will, but it is of very nearly the following proportions: hydrogen 25 per cent, atmospheric air 75 per cent. The ignition of the mixture is effected by electricity, as in gas motors.

In the small model constructed by the inventor, the generator of the explosions is a revolver magazine loaded with twelve cartridges, the charge of which is determined with care. Two clicks cause it to revolve automatically, but in order that these may operate and the magazine may revolve, it is indispensable to leave the aviator to itself, for the hammer is kept cocked only by the weight of the apparatus.

The starting is effected in the following manner: The aviator (Fig. 2) is suspended by a thread from the arm of a support, and the pendulum thus formed is moved from the vertical and is held by a second thread against the support. Two candles, one of them (A) movable, and the other (B) fixed, placed in the vertical of the point of attachment, serve to set fire to the two threads. If, with the first flame, A, the first thread be burned, the aviator, like the Foucault pendulum, will begin an oscillation. It will move from the position, 1, to the position, 2, in describing an arc of a circle, but, having reached this point, its acquired velocity is horizontal, and the flame, B, will burn the other thread. The hammer, at liberty, immediately falls, the cartridge explodes, the tube vibrates violently, and consequently the wings strike the air energetically on lowering. At the same time the aviator leaves the original horizontal plane, and, owing to the inclination of the tail, takes an ascensional motion, that is to say, the position, 3. Then the disengaged gases escape into the atmosphere in a direction opposite that of the motion, and exert a force of reaction. The vibrating tube resumes its original form and the wings rise a little more slowly than they descended. The magazine, moved forward by its click work, promptly brings a cartridge to the hammer, which drops and causes a second explosion, and the same phenomena occur again in the same order. During the third, fourth, and following explosions up to the twelfth the aviator travels a horizontal distance comprised between 245 and 260 feet, in struggling against gravity and progressively ascending. Finally, having reached the end of its flight, the aviator does not fall perpendicularly,

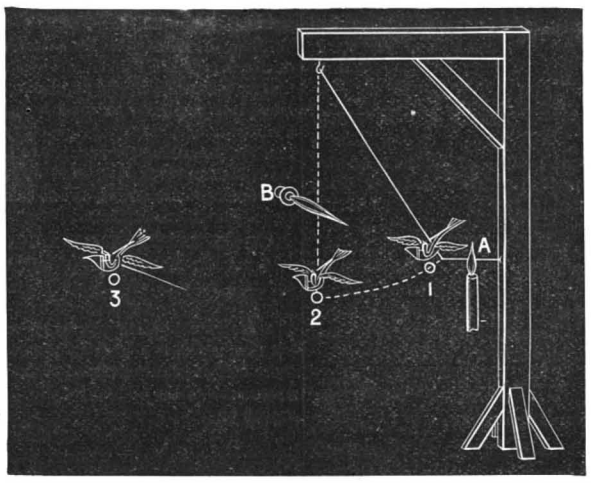

Fig. 2.—METHOD OF STARTING THE AVIATOR.

but the wings, kept raised by the approaching of the branches of the tube and by the silk aeroplane, C (Fig. 1), whose surface is proportional to the weight of the apparatus, act like a parachute, so that the apparatus descends obliquely and slowly to the ground. The aeroplane, represented by dotted lines, connects the rudder with the head, the first joint of the wings and the tail of the aviator. Mr. Trouvé thinks that in the future, whatever be the power of the motor, the use of the aeroplane will remain very serviceable, since its surface, constantly proportionate to the total weight of the apparatus, must prevent any accident in case of a sudden stoppage of the motor.

In an apparatus of large dimensions a reservoir of compressed hydrogen would be substituted for the cartridges of the small model, and the use of aluminum would be indicated, as much by its lightness as by its reasonable price. It should be remarked that the wide cooling surface of the vibrating tube and its contact with the air (which is so much the more intimate in proportion as the velocity is greater) would keep it at a medium temperature.

Upon the whole, Mr. Trouvé considers his apparatus as the lightest aviator that it is at present possible to construct, as its weight does not exceed 7¾ pounds, and as possessing every guarantee of ascensional power and performance.

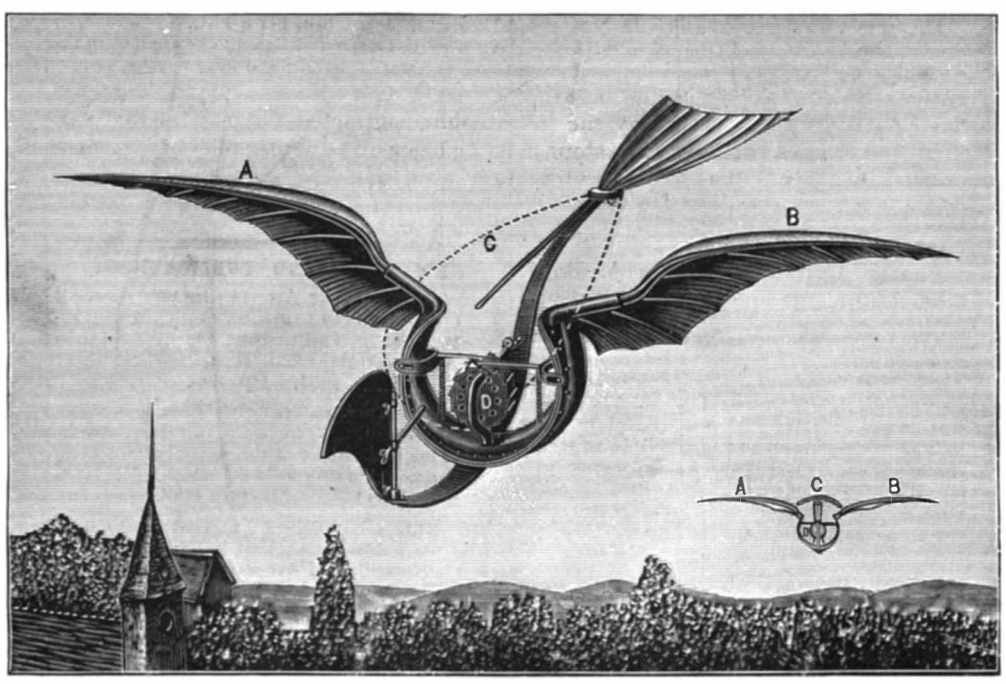

Fig. 1.—TROUVÉ'S AVIATOR.

The Art of Drawing.

To be able to draw well imparts to a person accuracy and correctness of observation; it is a valuable adjunct to an education; it conduces to make us more correct and certain as to what we do; it is a great helpmeet to the memory. How frequently it happens that in making an explanation of a new idea or object, if immediately placed on paper in the shape of a rough sketch or diagram, the whole thing appears clearer to the mind than if described without anything to give an idea of the shape of the object. To the young we say employ all your spare time in learning to draw. Allow no idle minutes.

Scientific Hydraulic Gold Mining.

In 1856 I was chosen as one of a committee of three to witness a test of hydraulic mining, for the purpose of deciding a dispute which had arisen between different manufacturers of hose nozzles. One of the parties had more than a half dozen made, in order to satisfy himself which was the best. The nozzleman generally stood from 20 to 30 feet from the gravel bank. On this occasion the water came down through wrought iron pipe about 8 inches in diameter, which ran down a steep hillside; to this was attached a canvas hose of eight thicknesses, and this was wound solid with about a ¾ inch manila rope, the lower end being tapered for say 50 feet to about 4 inches at the lower end; to this the strong rubber-lined woven hose of eight or ten thicknesses, and to the end of this the brass hose. The hoseman on this occasion was a short-set, very strongly built man, with a strap of leather over his shoulders and attached to the hose. The perpendicular fall of the water on this occasion was 196 feet, this being the most powerful pressure ever used for the purpose to that date. The gravel was what we called cement gravel, so hard that it could scarcely be picked up. The extreme end of each nozzle was from 1¼ to 1½ inches in diameter, varying in order to determine which would do the best work, or rather the most of it. In addition to the gravel the ground contained large bowlders of various sizes. One of the contesting parties claimed that the best results would be obtained by having the brass hose tapering from the canvas to within about 6 inches of the end, and that 6 inches to be of exact size; but the other party contended that the best results would be produced by having the nozzle tapered from the butt to the point as a true radial from 20 to 30 feet from butt to point; and that, if the radius was shorter than this, that the water would scatter after it reached the radial point. The man holding or operating the nozzle would quiver and tremble as the water poured from the nozzle and be compelled to stand with his feet braced apart to keep from being thrown down. On the bank stood a knurly white oak, about 18 inches through. Some gravel had been washed from under the roots of it. I suggested to the nozzleman to try each nozzle at 25 feet distant on the bark of the oak. This he did. The first nozzle with the 6 inch parallel point took off some of the coarse outside bark. We then took the nozzle tapered to a radius of 25 feet, and it peeled the tree wherever it struck it, even cutting into the wood and tearing out small splinters. This nozzle we decided to be the best for hard gravel washings. The victor published our decision all over the State and sent out circulars. He offered each of us $100 in gold, which we, of course, declined, we only allowing him to pay our expenses and $10.

I lost $5 of that $10 on a bet with a gentleman who knew more than I did. I bet him $5 that I could split the stream at the end of the nozzle with my penknife blade. So I went into the blacksmith shop and on an oilstone whet my knife as sharp as it could be. I scratched the end of the nozzle across the center so as to have a channel for my knife to run in, but after working for over half an hour and getting as wet as a drowned rat, and rather a laughing stock, I gave it up and handed him his $5 gold piece. It was singular to put one's hand against the stream at the very end of the nozzle, for it seemed as smooth as oil, and the end of one's finger merely made an apparent dent in it.

Many miners were badly hurt, and some of them killed, by being careless in using hose, by being knocked down, by stumbling over rock, and getting caught in front of the stream and driven against the banks or into the gravel. On this trial I saw immense bowlders turned over by the water from the nozzle of the hose that I do not think five men could roll over by hand.

J. E. EMERSON.

THE Compagnie des Hauts-Fourneaux, Forges et Acieries de la Marine et des Chemins de Fer, are experimenting with a new alloy for armor plates, projectiles, and guns, viz., a steel containing 1 per cent of chromium, 2 per cent of nickel, and not more than 0·4 per cent of carbon. The steel is first melted in an open hearth, and in the ordinary way. When the silicon and manganese in the metal have attained their proper proportions, the nickel and chromium are added successively in the form of ferro-nickels and ferro-chromes, or in the shape of a double ferro-chrome and nickel.

THE average annual rainfall in the United States is 29·6 in., the variations ranging from 0 to about 125 in.

© 1892 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

STEAM GENERATOR.—Frank C. Romkey, Toledo, Ohio. This invention consists principally of a gas-producing furnace, the fuel in an incandescent state resting upon a revolving grate, while connected with the combustion chamber is one or more evaporators, and a water jacket held on the furnace discharges into the evaporators. The construction is designed to be simple and durable, and the water in jets is evaporated to mix with the products of combustion arising from the burning fuel in the furnace.

GENERATING MOTIVE POWER. — The same inventor has been granted another patent on an improved method and apparatus for economically generating motive power from oil, gas and water, for driving engines or other motors. It consists in compressing and mixing air with a liquid fuel, such as oil, in an air compressor, then forcing this mixture under pressure into a burner in which it is burned, passing the products of combustion into water to generate steam, and mixing the latter with the products of combustion. The apparatus consists principally of a boiler connected with a water supply and a burner, and a compressor forcing a mixture of air and oil or gas into the burner to be burned, the products of combustion passing into the boiler.

SCREEN AND CONVEYER.—Micajah T. Singleton, Arcadia, Fla. This is a combination apparatus for screening sand, gravel, etc., washing, screening, and conveying the material at one and the same time. The screen, mounted on a suitable frame, is formed of series of longitudinally aligned wedge-shaped links, rabbeted and overlapped at their adjacent ends, rods extending through the ends and connecting the links of the several series, while tubular washers on the rods space the series of links apart, the outer series being spaced by wider links. A transverse imperforate carrier belt extends between the upper and lower runs of the endless screen, and the entire apparatus is adapted to be boxed in to prevent waste. The screen is universal in its application and may be placed upon a cylindrical frame and used as a revolving screen.

DITCHING MACHINE. — Ottis Hughes, Lock Spring, Ind. A machine designed to automatically dig a ditch and lay tile in it is provided by this invention, a vertically movable bit and shovel being mounted in a portable frame, and a scraper arranged to push the earth from the shovel, with earth shields pivoted on the sides of the frame. An engine and boiler are located on the front portion of the main frame, and the shovel blade is caused to elevate the earth from the bottom of the trench and carry it opposite the ejector or shovel scraper. The tiles are laid by being adjusted and dropped down through a depending spout pivoted to the rear portion of the machine.

COFFER DAM.—Elmo G. Harris, Little Rock, Ark. This improvement is designed to combine the simplicity and economy of the open coffer dam with the efficiency of the pneumatic caisson. The dam has at the bottom of its walls a continuous chamber open at the bottom, the outer wall reaching to a greater depth than the inner wall, and connections are provided by which air can be forced into the chamber to drive down the water and enable men to enter and operate. By this means it is designed that subaqueous structures may be more readily and more economically built, and existing submerged structures conveniently strengthened or enlarged.

WATER WHEEL. — James C. Walker, Waco, Texas, The wheel casing, according to this improvement, has two inlet ports arranged side by side and opening into the same inlet pipe, there being two hinged gates with valves for opening the ports alternately by the action of the gates, and a wheel having inclines upon its periphery for acting upon the gates. The wheel is a solid steel disk, with buckets attached to its outer edge and supported by inclined webs or flanges. According to this improvement it is designed that the energy of the water shall act upon a series of peripheral buckets on the principle of hydraulic pressure, in contradistinction to that of mere impact and momentum.

Railway Appliances.

CAR COUPLING. — Alfred R. Heath, Covington, Ind. This improvement relates to that class of couplers in which a pivotal coupling hook is employed having a vertical movement for engaging a transverse pin or shaft on an opposing car. The coupling hook is carried by a rock shaft on which are weighted arms to normally maintain the hook in position to couple, and a presser arm or cam on the shaft at the point engaged by the hook of an opposing coupling, the rocking of the shaft serving to depress the hook thereon, while the presser arm on the shaft serves to disengage therefrom the hook of an opposing car, the invention also embracing other novel features.

RAIL CROSSING. — Smith S. Leach, Cambridge, Mass. This invention is designed to provide a simple practical device adapted to form a rail crossing at any angle, making each rail of such crossing continuous when in service and also connectable to a switch or signal stand for manipulation. Combined with a base plate and intersecting track rails thereon, there being spaces between aligning track ends at points of intersection, is a sliding block for each rail intersection and a triangular projection which may be moved with the block to align with either of the crossed rails on their inner edges, guide flanges being connected to the rail sections and blocks and devices that will coact to move all the blocks and flanges simultaneously.

Agricultural.

PLOW.—Ocran D. Bunt, Bowdon, Ga. A spring fender which will readily accommodate itself to the varying surface of the soil is provided by this invention, the fender being quickly and easily attached to and adjusted upon a plow or removed therefrom. Upon a bar projecting laterally from the beam is adjustably secured the rearwardly bent portion of the spring fender bar, which is bent vertically upward and rearward at its forward end the fender being carried upon the rear end of the bar, and being vertically, transversely, and longitudinally adjustable to accommodate itself to all irregularities of the soil.

HAY STACKER. — Thomas Collins, Forks, Pa. Combined with a post upon which is swiveled a frame is a platform adapted to receive hay pivoted on the frame, and having a sliding and extension frame to which cables are attached, one drawing the frame outward and the other forcing it upward, while a locking mechanism connects the platform with the swiveled frame. The device is adapted to be erected in a mow or shed, or in a barn, or wherever hay or straw is to be stacked, receiving the latter directly from the fork, and being manipulated from the wagon to distribute the hay or straw to any side of the stack, without the assistance of a man on the stack to direct the distribution.

CALF WEANER.—Francis G. Powers, New Salem, Kansas. This device consists of a skeleton spring frame, the upper portion of which is divided and the extremities provided with soft pads or balls, while an apron is pivoted to the lower portion of the frame, and a spring-controlled shaft is held therein, whereby the two pads may be carried outward or inward in direction of each other. When placed in position the apron falls down over the mouth and effectually prevents the animal from nursing, but when the animal holds its head in the natural position for feeding or grazing the apron swings outward, out of the way.

Miscellaneous.

MUSIC RECORDER.—Juan B. Calcano i Paniza, Caracas, Venezuela. This is a recording mechanism for musical instruments, pianos and organs especially, in which a series of levers have link connection with the keys and are provided with marking blocks or crayons, fingers extending downwardly between the levers, and a tape being held to revolve under tension beneath the crayons. As each key is pressed a mark indicating the note produced is made upon the tape, and the length or duration of the sound is indicated by the graduations. A key is provided whereby the marks made may be quickly and conveniently read and transcribed in the usual notes employed in reading and writing music.

DISTANCE MEASURER AND REGISTER.—Victor Ml. Armenta, Santa Marta, Colombia. This invention relates to surveying instruments, and provides an instrument in which a wheel, journaled in a suitable frame, has on one or both faces a graduation indicating linear measurement in meters and subdivisions or yards and subdivisions, whereby accurate measurements are made as the wheel is moved over the ground. On every revolution of the wheel a projection engages a lever forming part of a registering device, another projection operating a striker, so that a bell is sounded simultaneously with the actuating of the registering device. The frame may be connected with or form part of a vehicle moved by animal or other power over the ground.

CARPENTER'S LEVEL. — Herman R. Winkelmann, Oakland, Fla., and Adam C. Perkins, Macon, Ga. This is a combination plumb and level with an adjustable inclinometer and novel brace scale therefor, to indicate the degree of bevel to be given to the ends of diagonal braces in framed structures, and the slope of cuts for the ends of rafters having different elevations from a horizontal plane, while a compass is also provided to facilitate the location of foundation walls, side walls, etc. The level stock is preferably made of hard wood, two feet long, longitudinally divided into two pieces of equal thickness, detachably secured together.

DRAWING BOARD.—Junius D. McCabe, Coraopolis, Penn. This board consists of a stationary frame provided with a head supporting a quadrant adjacent to the edge of a circular drawing board turning on the frame, and provided at its outer edge at each ninety degree point with a vernier reading to minutes. The board is designed to be simple and durable in construction, arranged to conveniently plot surveys from notes, using either bearings or angles, while also serving as a revolving drawing board for different purposes.

FRAME BUILDING. — John A. Boyd, Houston, Texas. This invention provides a method of construction designed to be inexpensive, the frame of the structure consisting essentially of studs, wall plates, sills, joists, tie beams and rafters, so formed that the several parts may be readily detached one from the other and packed for transportation. The building thus formed is substantial and adapted to either temporary or permanent purposes, while being readily erected and quickly taken down without injury. It is especially adapted for erection in out of the way places where skilled labor is not to be had, as skilled workmen are not required to locate the parts and put up the work.

VAPOR BURNER.—Logan W. Everhart, Chanute, Kansas. This improvement comprises a retort having attached burners which may be readily placed in the fire pot of a stove, range, or boiler furnace, for cooking and water-heating purposes. The retort is also arranged for the vaporization of water flowing in passages therein, with exit in a discharge pipe adjacent to the vapor discharge pipe, the steam issuing in jets into the vapor jets, and the vapor, steam, and external atmosphere intimately commingling to form a good suction draught and produce an intense and smokeless flame. The generator is of simple construction, very easy to clean, and can be manufactured at a small cost.

DISH WASHER. — Eliza A. H. Wood (deceased; John P. Gallaway, Tavares, Fla., administrator) and Minnie Wood Gordon, Bloomfield, Fla. This is an oblong sheet metal receptacle, having a closely fitting removable cover, and a heavy loose lid sliding inside and adapted to rest upon the dishes to bind them sufficiently to prevent disarrangement. A low-down faucet is provided for the drainage of water, and the receptacle is adapted for ready connection with a simple form of cradle, with the aid of which the entire device is rocked, so as to cause a thorough and rapid circulation of hot soapy water through the dishes and other ware being washed, thus effecting a thorough cleansing with safety and in a convenient manner.

SHOVEL.—Hanford Reynolds, Gifford, Ill. This is a special form of shovel adapted for use in cleaning out tank heaters and feed cookers. It has a base plate having a flange or side wall on its back and one end, the flange or wall having beveled ends, and a handle extending vertically from the base. The shovel is strong, durable and cheaply made, and is adapted to be easily inserted beneath the grate of a heater and cooker to scoop up the ashes.

TAG HOLDER.—John W. Barton and William J. McNabb, Blue Rapids, Kansas. This device is preferably made of sheet metal in the form of a narrow fluted strip, bent over at its ends, and fashioned intermediately to form a tag-holding plate, with a slideway or pocket for the entry of a card or other tag. It is particularly adapted to be slipped on pantaloons kept in stock and piled up for sale, promoting convenience of handling by the salesman, and forming also a pantaloons protector.

CONSTRUCTION OF LEGGED ARTICLES.—William J. Humphreys, Crozet, Va. This invention covers a mechanism to render tables and other articles self-adjusting to floor inequalities, comprising two separate and independent vertically sliding rods, between which is a horizontal equalizing bar or lever, there being operating devices at the ends of the bar and upper ends of the sliding rods to permit the bar to be moved by one rod when the other rod moves oppositely to the first rod. The use of the device is designed to cause tables, bureaus, washstands, etc., to rest evenly and solidly upon the floor at all times.

VEHICLE SPRING SEAT ATTACHMENT.—John W. Haney and William A. Owens, Garden Valley, Texas. This improvement is designed to be readily applied and afford a simple means of holding spring seats perfectly steady without in the least interfering with the action of the springs, such seats generally wearing out quickly because the bolts and springs become displaced or broken by the lateral motion of the seat. On the inner sides of the spring bars are keepers through which slide vertically uprights, and diagonal braces extend from the uprights to the under side of the seat, the braces moving through slots in the keepers when the seat is moved vertically.

WAGON.—Paul H. Munroe, Plainfield, Ill. The body of this wagon is mounted on crank axles carried in the wheels, the cranks of the rear axle being connected directly with the wagon body by spiral springs, a novel form of fifth wheel being mounted on the forward axle and supporting the body, while spiral springs are secured to the cranks of the forward axle and to a frame on the fifth wheel. The spiral springs are adjustably connected to the body, which has the advantages of being low down and open at the sides, so that the wagon may be easily loaded and unloaded. The construction of the fifth wheel and the frame and springs connected with it is designed keep the springs always in a definite position in relation to the axle.

SLEIGH. — Olaus A. Normann, St. Oloff, Minn. The body of this sleigh has on its under side a bolster to which the knees are pivoted, springs being secured to the ends of the bolster and connected by cross bars secured to the body, while there are rods secured to the runners and links pivoted to the rods and springs, springs being also hinged to the upper ends of the runners and to the forward part of the body. This sleigh is designed to be cheaply built, not to capsize easily, and to conform to the inequalities of the road without jumping, while being so flexible that it will ride very easily.

SIDE APRON FOR BUGGIES, ETC. — Thomas H. Joyce, Bath Beach P. O. (Unionville), N. Y. This is an apron designed to be attached to the bows and seat of buggies and light vehicles, to protect the occupants, the aprons being so hung as to be independent of the lap robe, etc., while being easily moved out of the way.

NOTE.—Copies of any of the above patents be will furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention and date of this paper.

NEW BOOKS AND PUBLICATIONS.

THE CENTENNIAL ANNIVERSARY OF THE CITY OF GALLIPOLIS, O., October 16-19, 1890. Columbus, O.: The Ohio Archæological and Historical Society. Vol. III. 1891. Pp. 326.

The report of the recent centennial celebration of this growing Western city is contained in this volume, the third of the publications of the society named, and a good testimonial to the good work which it does in recording the early history of the State of Ohio.

CORNELL UNIVERSITY: HER GENERAL AND TECHNICAL COURSES. By Frank C. Perkins. New York: John Wiley & Sons, 53 East Tenth St. 1891. Pp. 77. Price $1.50.

By the liberal use of very beautiful photogravures, this little manual presents us with an excellent view of life and work at Cornell University. It includes views and description of the prominent lecture rooms, laboratories, etc., with portraits of many of the professors, instructors, and founders. A short description accompanies each plate.

THE SEPARATE SYSTEM OF SEWERAGE: ITS THEORY AND CONSTRUCTION. By Cadey Staley and George S. Pierson. Second edition. Revised and enlarged. New York: D. Van Nostrand. 1891. Pp. 281. Price $3.

The essence of the separate system of sewage is the use of sewers for sewage only, except so far as the introduction of a certain amount of roof or surface water may appear desirable for flushing purposes. This work, with its numerous tables, illustrations, rules of good practice and examples of specifications, seems eminently practical and well adapted for the practical engineer. The financial question receives, too, ample treatment, it being recognized that finance and good engineering are very intimately related. The agitation for sewage systems is fast spreading among our smaller towns, hitherto deprived of such adjuncts to health and convenience. It is believed that this work is most timely, and will prove of the greatest value.

ELECTRIC TOY MAKING FOR AMATEURS. By T. O'Conor Sloane, Ph.D. New York: Norman W. Henley & Co. Pp. 140. Price $1.

This is a little book designed to be very helpful to the amateur in the line of experimentation and construction, pointing out the best means and methods of following out special ideas in many directions, and showing the limitations within which electric toy making is at present pursued. The book has chapters giving comprehensive and concise information upon batteries, magnets, motors, spark and induction coils, etc. Among the toys specially described are the electric dancer, magnetic toys, the electric hammer, and electric insects. A very practical portion treats of electric batteries from common materials, and how to manage them so as to secure good results.

PRACTICAL TYPEWRITING. By Bates Torrey. New York: Fowler & Wells. Pp. 156. 8vo. Price $1.

This is a book arranged for self-instruction, school use, and lessons by mail, containing also general advice, typewriter expedients and information relating to allied subjects. The book is primarily devoted to a lucid presentation of the "all finger" method, which leads to operation by touch. Many forms and examples are given of reportorial, legal, business and figure work, and there is a chapter on typewriting for the blind.

CATALOGUE OF THE T. H. CHUBB ROD CO. Post Mills, Vt. 1892. Pp. 93. Price 25 cents.

This elegantly illustrated catalogue will, we believe, be warmly welcomed by the world of fishers. The manufacture of the Chubb rods has already been treated of in our columns. In the present catalogue not only rods and the miscellaneous goods of the gentle art are described, but eight colored plates of artificial flies give a standard value, which it is unusual to find in catalogues. Nearly three hundred artificial flies are beautifully portrayed in chromo-lithographs.

SCIENTIFIC AMERICAN

BUILDING EDITION.

FEBRUARY NUMBER.—(No. 76.)

TABLE OF CONTENTS.

1. Elegant plate in colors of a cottage at Short Hills N. J. Estimated cost, $5,000. Perspective elevation, floor plans, etc.
2. Colored plate illustrating a cottage at Great Diamond Island, Me., erected at a cost of $900, complete. Floor plans, elevations, etc.
3. A residence at Portland, Me. Cost, $11,000 complete in every respect. Floor plans, perspective elevation, etc.
4. The very attractive residence of E. T. Burrows, Esq., at Portland, Me. Cost, $9,500 complete. Perspective elevation, floor plans, etc.
5. A dwelling at Augusta, Me., erected at a cost of $3,200 complete. Floor plans and perspective elevation.
6. A handsome dwelling at Carthage, Ill., designed in the style of modern Romanesque. Cost, $8,000. Perspective and floor plans.
7. A residence colonial in treatment and recently erected at Belle Haven, Greenwich, Conn., for Mr. Chas. A. Moore, at a cost of $14,000 complete. Two perspective elevations, floor plans, etc.
8. A colonial residence recently erected at Brookline, Mass., at a cost of $18,000 complete. Wm. T. Sears, architect, Boston, Mass. Perspective elevation and floor plans.
9. An architect's home, with sketches showing the hall, drawing room, terrace, entrance front, dining room, together with ground plan. A thoroughly cozy, comfortable, and complete dwelling.
10. Sketch for a suburban chapel. Submitted by O. M. Hokanson in the St. Paul Architectural Sketch Club competition.
11. View of the Washington Street tunnel at Chicago.
12. Miscellaneous contents: Architecture and poetry.—Waterproof wall coatings.—Colored woods.—The planning and construction of American frame houses.—Church spires.—Ownership of plans.—Simplicity in furnishing and decorating.—Utility and art. Improved door hanger, illustrated.—The Madison Square Garden weather vane, the huntress Diana, illustrated.—Schmidt's window frame, illustrated.—Sackett's wall and ceiling board.—An improved mitering machine, illustrated.—A combination folding bath tub, illustrated.—Japanese interiors.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS.
361 Broadway, New York.

© 1892 SCIENTIFIC AMERICAN, INC.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

For Sale—One Payne engine and boiler. Automatic cut-off. In first class order. But little used. W. P. Davis, Rochester, N. Y.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

6 Spindle Turret Drill Presses. A.D. Quint, Hartford, Ct.

2d hand drills and shapers. Amer. Tool Co., Clev., O.

Mixing machinery. J. H. Day & Co., Cincinnati, Ohio.

For pile driving engines. J. S. Mundy, Newark, N. J.

Portable and Stationary Cylinder Boring machines. Pedrick & Ayer, Philadelphia, Pa.

Wanted—Second-hand Woodward Pumps. P. O. Box 60, N. Y. City.

Wanted—2d hand Nash gas engine, 1 H. P. 2d hand Gap lathe, small size. W. K. R., Drawer 442, N. O., La.

Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Centrifugal Pumps. Capacity, 100 to 40,000 gals. per minute. All sizes in stock. Irvin Van Wie, Syracuse, N.Y.

Patent for sale or partner wanted. Leuzinger clothes line pulley, patent, May 12, 1891. For description, see page 99.

Wanted—2 steam jacket kettles, 35 to 70 gallons each, lower drain. G. W. Hoffman, 69 E. Wash. St., Indianapolis.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

Split Pulleys at Low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

Competent persons who desire agencies for a new popular book of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.

Magic Lanterns and Stereopticons of all prices. Views illustrating every subject for public exhibitions, etc. ☞ *A profitable business for a man with small capital.* Also lanterns for home amusement. 220 page catalogue *free*. McAllister, Optician, 49 Nassau St., N. Y.

☞ Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(4007) M. L. asks: 1. What is a good charge for tin assays? A. Tin ore 5 grammes, potassium cyanide in powder 25 grammes. Besides this the crucible is lined with a layer of the cyanide, and the charge is covered with the same. Fuse and keep fused for 10 minutes. The cyanide is one of the worst poisons known, but this gives about the best results of any of the fire assays. A non-poisonous charge is: Tin ore 5 grammes, charcoal 1 gramme (mixed with the ore), 12·5 to 15 grammes black flux, 1 to 1·25 grammes borax glass. Cover with salt and a small piece of coal. Fuse three-quarters to one hour. 2. Is it possible for mercury to soak through a copper plate in a mill so as to ooze out in drops underneath? A. Yes. 3. Why are old plates so valuable? A. On account of the precious metal they retain. 4. It is stated that horse power will be furnished (or can be) over the distance from the Niagara to Chicago for about half the cost of steam power. Is this true? A. The exact proportion cannot be given. The interest on the installation and cost of maintenance will probably make it impossible. 5. What size current is necessary and how is it used to remove superfluous hair by electrolysis? See our SUPPLEMENT, Nos. 176, 353, 834.

(4008) A. E. G. writes: In the SCIENTIFIC AMERICAN for August 1, Professor Henry Rowland is quoted as saying "the voltage of stroke of lightning is roughly estimated at about 6,000,000,000 volts." What is the amperage of a stroke as nearly as may be judged by a similar estimate? A. Carl Hering, in his "Dynamo-Electric Machines," says that the E. M. F. of lightning is 3,500,000 volts, and the current is about 14,000,000 amperes. The energy is estimated to be equal to a 100 horse power engine working 10 hours. 2. Where can I learn the tonic sol-fa notation or system of writing music? I would like to buy a book to learn it from. A. In most schools where music is taught. 3. As the patent laws are now, can any one make a patented article or machine, if they make it themselves and use it exclusively for their own benefit, without becoming liable for infringement? A. No. 4. How is the carbon deposited on carbon paper? A. It is applied with a brush or sponge, the carbon or other pigment being mixed with glycerin or vaselin, with a mixture of beeswax and oil or some similar medium. 5. When a metallic spring is compressed it contains latent energy, representing the power expended in compressing it. If it is dissolved in acid while still in a compressed state, what becomes of the latent mechanical energy it contained? A. The energy expended in compression is given out in heat, which is dissipated.

(4009) L. M. C. asks (1) how to make a storage battery suitable to run a ⅛ or ¼ candle power electric light in a necktie and small enough to carry in a coat pocket? If this subject has been discussed in any of your papers, will you please refer me to such? A. We expect to publish a description of a storage battery suited to your purpose at an early date. 2. What is the fluid used in those "electric inhaler" bottles? Consist of a small bottle with a screw top, and a piece of copper separated from a piece of zinc by a strip of flannel. The fluid completes it. When placed near the nostrils a strange sensation is felt, extending to the back of the head. A. Oil of mustard is the principal ingredient. 3. Is there any acidproof paste that can be mixed like cement and will harden in a few minutes? A. For weak acids use oxide of zinc and a solution of chloride of zinc. Chloride of zinc is poisonous, but the cement is inert after hardening and washing. For strong acids melt together pitch 1 part, resin 1 part, and plaster of Paris 1 part; all the ingredients must be dry. 4. Will you please tell me how to compute the quantity of wire required to get the greatest magnetism out of a bar of soft iron? A. For this information we refer you to Sloane's "Arithmetic of Electricity," $1, and Thompson's "Electro-magnets," $6, by mail.

(4010) Subscriber wishes to know the following: At his place of business there is a 20 horse electric motor, 500 volts. The writer while thoughtlessly adjusting brushes caught hold of all the lower brushes and pressed them upward, this having the desired effect. He also took hold of the upper set and was quickly thrown backward. Now what amount of current passed through me, the machine running a load of about 12 horse power? After catching hold of brushes I felt nothing except the after effect, which was a slight shaking of the hand and a slight soreness of finger ends. A. It is impossible to form any idea from the data sent as to the amount of current passing through your body, as it is wholly a question of resistance. The condition of your hands may have been such as to have prevented anything more than a small fraction of the current from passing through you. For instance your hands may have been very dry or very oily. On the other hand, your hands may have been moist and the contact with the brushes good, in which case you would have received the amount of current due to the normal resistance of your body, which would have been only a fraction of the output of the machine.

(4011) H. W. G. asks how to construct a steel triangle to be used in lieu of a bell. I want it with sides from 3 to 4 ft. long. Please state what kind of steel to use? What shape, whether square or round? Proper form of construction, and should angles be bent sharp or rounding? How should it be hung, and with what should it be struck to obtain the best sound? I am informed that to strike a bell with wrought iron will ruin the bell. Is this true, and would the same effect be produced upon a triangle by use of a similar striker? A. For a steel triangle with sides as stated, use a square bar of tool steel one inch diameter and from 10 to 12 feet long. Balance the bar in two loops of strong twine about one-third of its length from each end. Strike the bar between the end and one of the strings. Move both strings toward the center a little at a time to get the tone that suits you, and when the proper bearings are found, mark them with chalk and bend to a triangle at the marked points with an easy bend. A wrought iron hammer would not injure a triangle more than a hammer of any other metal.

(4012) J. E. H. writes: I wish to make a storage battery. Battery is to have 10 plates 6 inches long and 8 inches wide; plates are to be of lead one-twelfth inch thick marked in squares of one-eighth inch, with holes punched at each corner of squares and covered with a coating of red lead paste made by mixing red lead with diluted sulphuric acid. In what proportions with water will I dilute the sulphuric acid? A. Use 1 part of acid to 10 of water. 2. About how much current will such a battery yield for three hours, working constantly, after being charged? A. About 20 amperes. 3. How many gravity batteries should I use in forming the plates and afterward in charging the battery? I only wish to use storage battery once in two days. The zinc and copper of the primary battery each has an active surface of about 18 square inches. Sulphate of copper and sulphate of zinc are used in charging the cells. A. The forming as well as the charging may be done with four cells. The forming however could be facilitated by the use of four times that number.

Replies to Enquiries.

The following replies relate to enquiries recently published in SCIENTIFIC AMERICAN, and to the number therein given:

(3889) Referring to Notes and Queries No. 3889, C. E. H. has no cause for alarm, as the milky appearance in the water from his hot water boiler is caused by a foaming from the air it contains. This is readily shown by drawing a tumblerful and holding it up to the light, when it will be seen that the water clears from the bottom, and what appear to the eye to be white particles rises instead of falls.—W. G. BLISH.—[It is well known that the vesicles of air and steam rise in the clearing of water drawn from the hot water faucet. This does not account for the sediment that settles from hot water drawn from a galvanized iron boiler. This goes to the bottom every time.—ED.]

C. A. G. asks for a black ink.—J. H. G. asks for an acid-proof cement for nickel-plating tanks.—L. B. asks for a receipt to give a steel-blue on brass.—A. O. asks for a receipt for fining wine.—T. T. M. asks how to make and ink typewriter ribbons.—A. C. G. asks for a cement or mucilage to stick labels to tin.—C. W. F. asks for a stain for Russian tan shoes.—G. E. P. asks for a good bay rum and sea foam.—G. F. L. asks for pastes for mounting photographs.—F. C. C. asks how to make a dipping solution for silvering.

Answers to all of the above queries will be found in the "Scientific American Cyclopedia of Receipts, Notes and Queries," to which our correspondents are referred. The advertisement of this book is printed in another column. A new circular is now ready.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

February 2, 1892.

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Adding and printing machine, Mason & Shoup.... 468,250
Air brake, R. G. Coates.....467,920, 467,921
Air cooling apparatus, E. H. C. Oehlmann..... 468,115
Alarm. See Burglar alarm.
Aluminum, separating, C. S. Bradley..... 468,148
Amalgamating silver ores, A. Janin..... 468,063
Animal shears, C. & H. Burgon..... 468,217
Annunciator, electrical, W. Ebert..... 468,170
Ash pan and fender, extension, T. L. Jenkins..... 467,988
Awning, W. N. Kennedy..... 468,277
Axle box, anti-friction, E. M. Briedwell..... 467,968
Axle collars, device for cutting grooves in, H. Holcomb..... 468,085
Bank bill binder, H. D. Allen..... 467,967
Barrels, thimble and bushing for, Anthony & Savage..... 468,144
Basin, catch, J. E. Shapley..... 468,157
Basins, seal trap for catch, T. Tomlinson..... 468,141
Beams, bolster for, L. Duvinage..... 468,062
Bearing, ball, H. G. Yates..... 468,067
Bearing, thrust, W. H. Hultgren..... 468,043
Bed bottom, A. H. Frost..... 468,054
Bed pan, W. A. Crandall..... 467,923
Bed, wardrobe, J. Teel..... 468,184
Bedstead, J. L. Poalk..... 468,030
Beer cooler, V. C. Trabold..... 468,050
Belt driving mechanism, T. J. Lumis..... 468,078
Belt tightening base for machinery, J. J. Wood... 468,010
Bicycle, G. A. Burwell..... 467,914
Bicycle shoe, M. S. Hess..... 468,223
Billiard cushion, F. H. Briggs..... 468,076
Billiard tables, chalk holder for, W. Sherwood.... 468,278
Binder, temporary, A. A. Hunziker..... 468,199
Bit. See Bridle bit.
Blinder, bridle, R. G. Cather..... 468,238
Block. See Engraving block.
Board. See Dry board. Game board.
Boats, foot rest for row, J. J. Sherman..... 468,211
Boiler feeder, H. Rauser *et al*..... 468,209
Boilers, feed water mechanism for steam, S. S. Fleming..... 468,014
Book, record form, O. E. Naegele..... 467,994
Boot or shoe, C. A. Brown..... 468,187
Boot tree, G. H. Stephens..... 468,066
Bottle making machine, glass, T. W. Synnott..... 468,140
Bottle sealing device, W. Painter...468,226, 468,258, 468,259
Box. See Axle box. Display box.
Box clamping machine, A. A. Fuchs..... 468,094
Box corners, machine for trimming, C. H. Fuchs. 468,095
Box covers, locking device for, F. Stickney..... 467,960
Box tenoning machine, C. H. Fuchs..... 468,096
Boxes, former for making, A. Folger..... 467,986
Braiding machine, G. McKay..... 468,225
Brake. See Air brake. Locomotive driver brake.
Brake mechanism, automatic fluid pressure, W. F. De Forest..... 468,240
Brick kiln, G. C. Little..... 467,981
Brick machine, J. C. Anderson..... 468,059
Bridle and relievable bit, safety, J. Atkinson..... 468,299
Bridle bit, C. Smith..... 468,309
Bronzing machine, W. B. Silverlock..... 467,957
Broom holder, J. M. Haise..... 467,932
Brushes, dusters, etc., holder for, W. F. Loan..... 468,036
Buckle clip, C. L. Wiedrich..... 468,028
Buggy curtains, device for raising and lowering, W. Wright..... 467,966
Building foundation, J. E. Robinson..... 468,229
Buildings, construction of, R. Guastavino..... 468,296
Buildings, constructing foundations for, J. E. Robinson..... 468,228
Burglar alarm, J. I. Covington..... 467,922
Button, separable, C. E. Perry..... 468,037
Cable grip adjusting device, H. H. Lynch..... 468,064
Cake tin, A. S. Stebbins..... 468,073
Canopy frame, C. Williams..... 468,280
Capodastro, Dahlman & Blomgren..... 468,193
Car check, J. M. DeWitt..... 468,061
Car construction, H. C. Hodges..... 468,176
Car coupling, W. P. Clark..... 468,192
Car coupling, A. C. McCord (r)..... 11,220
Car coupling, H. Sommerfeld..... 468,311
Car couplings, pin operating device for, J. W. Cloud..... 468,060
Car for use upon inclined railways, J. Messner.... 467,945
Car seat, E. L. Bushnell..... 468,255
Car step and gate, combined, C. O. Sobinski..... 468,310
Cars, bolster attachment for log, E. H. Mumford. 467,951
Carbonated beverages, apparatus for making, H. Carse..... 467,916
Carding engines, feed table for, S. Driver..... 468,106
Carding machines, wool, D. Lamson..... 468,202
Carriage curtain fastener, E. S. Richards..... 468,080
Carrier. See Target trap carrier.
Cart, garbage, W. Huey..... 468,310
Cart, road, C. Thomas..... 467,962
Case. See Lock case. Surgical instrument case. Typewriter case.
Cash register, G. W. E. Abmeyer..... 467,905
Caster, C. S. Fleming..... 468,195
Caster, furniture, Nickel & Wainwright..... 467,952
Casting iron pigs, ingots, etc., J. W. Cole..... 468,292
Casting knitting machine cylinders, mould for, J. E. Gearhart..... 468,171
Catamenial sack, J. J. Vernier..... 467,963
Caterer's tray table, F. R. Perryman..... 468,038
Chair. See Perambulating chair.
Chairs, cribs, etc., fan attachment for, W. H. Swift..... 468,090
Check hook, H. E. Kelley..... 468,024
Chopper. See Cotton chopper.
Churn, A. Fay..... 468,013
Churn, A. V. Stewart..... 468,158
Cigar cutter and lighter, F. Senff..... 468,287
Cinch, sling, D. O'Sullivan..... 468,205
Clamp. See Tobacco box clamp.
Clip. See Buckle clip.
Clock, alarm, S. A. De Normanville..... 468,255
Clover hullers, recleaner for, J. N. Kailor..... 467,978
Coal auger post, M. F. McNelly..... 468,058
Collar pad, A. Scott..... 468,230
Concrete mixing machine, W. C. Barr..... 468,290
Concrete pipe, metal brace-framed, O. A. Stempel..... 468,269
Concrete post, door step, table top, etc., O. A. Stempel..... 468,268
Condenser, surface, T. J. Rayner..... 468,048
Conveyer, C. W. Hunt..... 468,109
Conveyer mechanism, F. A. Lockwood..... 467,943
Cooler. See Beer cooler.
Corn popper, G. Staley..... 468,102
Cotton chopper, H. K. & T. G. Cansler..... 467,915
Coupling. See Car coupling. Electric wire coupling. Thill coupling.
Cover fastener, R. W. Moore..... 467,949
Cultivator, J. F. Nelson..... 467,995
Cultivator, S. Swanson..... 468,271
Cultivator, cotton, T. W. Brown..... 468,300
Cup. See Heating cup.
Cupola furnace, C. Sahler..... 468,306
Curtain ring, J. S. & G. Clayton..... 468,105
Cut-out, J. B. Murphy..... 468,101
Cutter. See Cigar cutter.
Damper, W. A. Kemp..... 468,285
Damper, W. A. & A. E. Kemp..... 468,284
Decorticating fibrous plants, machine for, Lanaux & Rendon..... 468,249
Dehorning implement, W. A. Campbell..... 468,236
Display box, W. Watt..... 467,964
Door closing or checking apparatus, Schubert & Werth..... 467,997
Door securer, C. F. Cardwell..... 468,218
Doubling and winding device for domestic use, E. Allison..... 467,906
Draught equalizer, E. T. Carter..... 468,237
Draw shave, G. M. Conover..... 468,239
Dredge, J. H. Kuoni..... 468,201
Dry board, C. A. Brown..... 468,188
Drying kiln, S. W. Peregrine..... 467,953
Dye, azo, C. Rudolph..... 468,049
Dye, blue-red azo, M. Ulrich..... 468,142
Electric current generators, regulator for, G. Pfannkuche..... 468,260
Electric currents, method of and means for interrupting, E. Thomson..... 468,120
Electric cut-out, A. L. Clough..... 467,919
Electric elevator, H. W. Leonard..... 468,100
Electric elevator, A. Neuburger..... 468,253
Electric light tower, C. A. Beardsley..... 468,186
Electric lights, device for raising and lowering suspended, S. M. Terry..... 468,159
Electric machine, dynamo, E. Thomson..... 468,121
Electric motor, J. W. Darley, Jr..... 467,924
Electric motor regulation, F. O. Blackwell..... 468,128
Electric or cable roads, conduit for, C. H. Bates.. 468,314
Electric signal system, H. F. Eaton..... 468,107
Electric switch, E. Thomson..... 468,119
Electric switch, A. Wright..... 468,125
Electric wire connector, C. J. Coleman..... 468,293
Electric wire coupling, W. B. Lillard..... 468,086
Electrical distribution, system of, H. W. Leonard 468,099
Electrical distribution, system of, E. Thomson.... 468,122
Electrical distribution, system of, Thomson & Rice, Jr..... 468,123
Elevator. See Electric elevator.
Embossing machine, H. Zitzewitz..... 468,168
Engine. See Rotary engine.
Engraving block, Barker & Wirt..... 467,911
Envelope, E. Morgan..... 468,079
Envelope machine, F. A. Jones..... 467,977
Extension table, A. M. Holstein..... 468,042
Eyeglasses, M. D. Hanway..... 468,034
Eyeleting machine, G. A. Pflueger..... 468,261
Fabric. See Woven fabric.
Fare register, electric, W. H. Gilman..... 468,172
Farm gate, J. N. Morgan..... 467,950
Feather tip or plume, E. W. Moch..... 467,947
Feed water heater, A. M. Rowe..... 468,181
Feed water heater, oil extractor, and water purifier, combined, F. Bauer..... 468,232
Feed water purifier, F. J. Henderson..... 468,034
Feeding cattle, crib for, E. G. Hastings..... 467,975
Fence, Marsh & Phillips..... 467,939
Ferrule, rawhide, F. Latulip..... 467,979
Fibrous materials, machine for washing, E. Gundrum..... 468,097
File, reference, H. I. Talley..... 468,312
Filter, J. H. Drake..... 468,294
Finger ring, J. H. Fink.....467,928, 467,929
Firearm, breech-loading, O. W. Bergman..... 468,127
Fire extinguisher, automatic, O. B. Hall..... 467,970
Fishing reel, O. P. Ross..... 468,180
Fishing rods, slack line attachment for, E. F. Pflueger..... 468,227
Flax, etc., machine for hackling, J. Erskine..... 468,194
Fly paper holder, H. R. Wendel..... 468,273
Frame. See Canopy frame. Purse frame.
Frames, device for securing covers to, H. Levy... 467,960
Furnace. See Cupola furnace.
Furnaces, superheating steam coil for smoke consuming, C. A. Tinkham..... 468,313
Furniture, D. W. Cannon..... 468,052
Gauge. See Surface gauge.
Game board, J. R. Harrison..... 467,972
Game board, E. L. Williams..... 468,214
Garbage receptacle, E. B. Merritt..... 468,046
Gas, apparatus for separating oil and water from, C. L. Stock..... 468,138
Gas, apparatus for turning on and off and lighting, E. N. Dickerson, Jr..... 468,131
Gas compressor, J. D. Ambrose..... 467,909
Gas meter, J. B. Knickerbocker..... 463,008
Gate. See Farm gate. Valve gate.
Glove, L. Frank..... 468,149
Glove fastening, J. S. Healey..... 467,974
Grain binder, L. H. Grieser..... 468,295
Grain cleaner attachment, H. Bryan..... 468,069
Grate, W. L. Carter..... 468,033
Gravel screening machine, F. T. Gilbert....468,134, 468,197
Gravel washing and grading machine, N. Jewett.. 468,247
Grinding machine, tool, E. F. Ternan..... 467,961
Grip tester, pocket, C. W. McClure..... 468,154
Grits, etc., apparatus for purifying or sorting, C. Haggenmacher..... 467,987
Guard. See Railway track guard.
Gun lock, T. J. Lockwood.....468,002 to 468,004
Hammer, A. Chambers..... 468,191
Hand press, domestic, J. W. Condon..... 468,023
Hand rest, E. A. Castellaw..... 468,082
Hand rest, E. E. Frederick..... 467,991
Hanger. See Trolley wire hanger.
Harness, W. H. Violett..... 468,213
Harrow, A. C. Wickham..... 468,081
Harvester knotter, E. C. Fulcher..... 468,244
Hay cap, Henn & Fulwider..... 468,276
Hay rack, S. R. Carson..... 468,190
Hay rake and loader, combined, P. Hope..... 468,035
Heater. See Feed water heater.
Heating cup, A. Berger, *et al*..... 468,147
Heel nailing machine, H. A. Webster..... 468,279
Hinge, gate, G. Rohrbach..... 468,210
Holder. See Broom holder. Fly paper holder. Knitting machine web holder. Pail holder. Paper holder. Telephone holder.
Hook. See Check hook. Whiffletree hook.
Horns, mouth piece for reed, I. W. Pratt..... 468,156
Horseshoe, D'Amilly & Caillet..... 468,130
Horseshoe, W. H. Moore..... 468,252
Hub, J. H. & E. S. Coyle..... 468,220
Hydraulic apparatus, J. Weeks..... 468,104
Ice cream freezer, C. L. Bellamy..... 468,092
Ice cream freezer, J. C. Hoxie..... 467,934
Impression roller, F. M. Moore..... 468,071
Indicator, R. L. Appleby..... 467,910
Insulating swivel, A. H. Englund..... 468,053
Insulator, C. T. Lee.....467,941, 467,942
Invalid and center table, combined, W. Kohlstetde..... 468,112
Iron ore, composition of matter and process of preparing comminuted, G. Conkling..... 468,219
Ironing machine, H. E. Smith.....468,266, 468,267
Ironing table, B. F. Mellott..... 467,944
Jigging machine, R. Kennedy..... 468,111
Joint. See Rail joint.
Joint and metallic cylinder and producing the same, White & Bigelow..... 468,298
Key seat cutting machine, M. Morton..... 468,072
Kiln. See Brick kiln. Drying kiln.
Knitting and forming hose, F. W. Simons..... 468,212
Knitting machine, circular, Scott & Williams..... 467,956
Knitting machine web holder, Paxton & O'Neill.. 468,137
Knitting machines, transfer device for, W. H. Almy..... 467,907
Knitting stockings, W. Esty (r)..... 11,221
Lamp, incandescent electric, D. H. Piffard..... 467,982
Lamp, oil spray, A. Shedlock..... 468,065
Lamp socket, incandescent, D. H. Piffard..... 467,983
Lamp socket, incandescent, W. L. Silvey..... 467,958
Lamps, wick raising mechanism for, W. A. Hull.. 467,975
Last, E. S. Morton..... 468,088
Last block fastener, E. S. Morton..... 468,087
Latch, A. Didion..... 468,040
Lathe, engine, P. & W. Shellenback..... 468,183
Lock. See Gun lock. Nut lock.
Lock case, L. Luger..... 468,017
Locomotive driver brake, J. E. Normand..... 468,254
Locomotives, spark arrester for, C. Cooper..... 468,169
Loom, F. J. Gallagher..... 468,133
Lounge, folding or bed, T. Q. Hall..... 468,297
Lubricant, J. Ketchum..... 467,938
Lubricator, E. D. Bangs..... 468,289
Lubricator, F. Prinz..... 468,262
Mattress, spring, G. W. Murray..... 468,018
Measure, rotary, R. F. Gillin..... 468,318
Measurer and bagger, grain, G. Anderson..... 468,091
Measuring instrument and current direction indicator, electrical, J. J. Wood..... 468,020
Mechanical movement, S. B. Wortmann..... 468,167
Meter. See Gas meter.
Milk aerator and cooler, combined, R. Wherry.... 467,965
Mill. See Saw mill.
Mine shafts, electric signal for, F. W. Bacorn..... 467,985
Moulding articles in sand, machine for, J. Forbes. 467,930
Motor. See Electric motor. Railway motor. Spring motor. Water motor.
Mower, lawn, T. T. Wood..... 468,075
Mowing machine, Rupert & Worst..... 468,264
Musical instrument, H. S. Saroni..... 468,265
Musical instruments, cut-off valve for, V. Seidel.. 468,308
Nipple holding machine, L. J. Mundelin..... 468,304
Nose ringer, P. C. Goodrich..... 468,174
Nut lock, C. C. Davison..... 467,925
Nut lock, B. Edgar..... 468,315
Nut shearing and punching machine, J. Altmann. 467,908
Oil can spout and stopper, J. C. & A. S. Ley..... 468,152
Oils, decolorizing vegetable, Hartley & Blenkinsop..... 467,992
Ore washers, picking table for, H. G. Merry..... 468,251
Overalls, G. J. H. Frank..... 467,931
Oxides of metals, apparatus for manufacturing, W. H. Birge..... 468,216
Pad. See Collar pad.
Padlock, R. J. Myers..... 468,113
Pail, dinner, H. B. Adams..... 468,011
Pail holder, O. J. Thomas..... 468,161
Painting machine, E. Armitage..... 468,145
Pan. See Ash pan. Bed pan.
Paperbag closing device, F. O. Paige..... 468,257
Paper holder and cutter, roll, G. M. D. Manahan.. 468,203
Pelts, machine for removing water hairs from, J. W. Sutton..... 468,270
Perambulating chair, stair climbing, J. B. Bray... 468,022
Piano, A. H. Hastings..... 468,135
Pianos, music desk for, T. P. Brown..... 468,077
Pianos, music desk for, E. Peterson..... 468,027
Pile armor or casing, Bedbury & Badgley..... 468,291
Pipe. See Concrete pipe. Sheet metal pipe.
Pipe under water, apparatus for laying iron, J. G. Falcon..... 467,927
Planing machine feed mechanism, A. B. Hutchinson..... 468,045
Planter, corn, J. P. Alinder..... 468,231
Planter, seed, A. J. Johnson..... 468,178
Planters, wheel for seed, W. H. Holsclaw..... 468,136
Plastic material, moulding, H. B. Garrigues..... 468,222
Pliers, compound, F. Newitt..... 468,005
Plow, W. A. Keahey..... 468,179
Plow, J. E. & E. M. Mitchell..... 467,946
Plow, J. Oliver..... 468,026
Plow, gang, C. Anderson..... 468,021
Post. See Coal auger post. Concrete post.
Press. See Hand press. Telescopic press.
Pressure regulator, J. B. Knickerbocker..... 468,007
Pressure regulator, fluid, I. Cumberbatch..... 468,129
Propeller for steam vessels, side, A. Cooper..... 468,039
Pulley lines, rider for, D. S. Hayward..... 468,098
Punching machine, R. H. Ireland..... 468,200
Purse frame, M. Koenig..... 468,248

© 1892 SCIENTIFIC AMERICAN, INC.

Rack. See Hay rack.
Rail joint, C. H. Jenne 467,935
Railway, C. W. Hunt 468,110
Railway, electric, M. Wheless ..... 468,163 to 468,165
Railway motor, electric, H. M. Byllesby 467,969
Railway stock guard, W. J. Bridges 467,913
Railway switch, S. T. Mock 467,948
Railway switch, C. E. Nowlin 468,256
Railway switch and signal interlocking mechanism, J. W. Thomas, Jr. 468,160
Railway time signal, E. Fontaine 467,990
Railway tunnel and constructing the same, street, T. G. Gribble 468,282
Railways, combined chair and fish plate joint for, W. Wharton, Jr. 468,762
Rake. See Hay rake.
Reel. See Fishing reel.
Register. See Cash register. Fare register.
Regulator. See Pressure regulator.
Revolver, Foehl & Weeks 468,243
Rifle sight, R. W. Parker 468,206
Ring. See Curtain ring. Finger ring.
Roller. See Impression roller.
Roofer's bending tool, W. L. & H. Heberling 468,016
Roofing, metal, W. L. & H. Heberling 468,015
Roofing plate, metal, C. F. Bellino 468,126
Rotary engine, G. H. Graham 468,198
Safe, burglar proof, M. Mosler (r) 11,219
Sash fastener, F. J. Rabbeth 467,954
Saw, crosscut, W. Kerr 468,150
Saw filing machine, J. H. Diehl 468,221
Sawmill attachment, Williams & Murray 468,215
Sawmill, band, C. J. Koefoed 468,303
Saw gummer, J. W. Ramsey 468,031
Saw teeth, holder for insertible, G. S. Black 468,012
Scale for measuring grain, drop, F. M. Gladish 468,173
Scale, wagon, Clawson & Wheeler 467,918
Seat. See Car seat. Vehicle seat.
Separator, F. H. Wheelan 468,066
Sewing machine, book, D. M. Smyth 468,117, 468,118
Sewing machine work guiding device, E. K. Morrison 468,056
Sewing machines, attachment holder for, T. S. Maxwell 468,153
Shears. See Animal shears.
Shears, A. Prohaska 468,207
Sheet metal pipe, screw beaded, A. M. Southard 467,999
Shovel, T. F. Hammer 467,971
Sign, illuminating, L. J. Webster 468,185
Signal. See Railway time signal.
Spring. See Vehicle spring.
Spring motor, C. C. Cordry 468,083
Stocking, W. Esty (r) 11,222
Stocking supporter, D. H. Warner 468,074
Stone working machine, Kavanagh & Winkley 467,937
Stoves, furnaces, boilers, etc., natural gas burner for heating, M. J. O'Reilly 468,155
Strainer, True & Blanchard 468,032
Stringed instrument, E. McNichol 468,114
Supporter. See Stocking supporter.
Surface gauge, J. Carr 468,093
Surgical instrument case, D. Kennedy, Jr. 468,224
Switch. See Electric switch. Railway switch.
Syringe, vaginal, W. H. Knap 468,151
Syringes, medicament receptacle for hypodermic, W. C. Durkee 468,001
Table. See Caterer's tray table. Extension table. Invalid and center table. Ironing table.
Target trap carrier, A. H. Hebbard 468,175
Telephone holder, J. A. Christy 467,917
Telephone receiver, E. A. Grissinger 468,246
Telephones, cut-off for, E. Cann 468,281
Telescopic press, horizontal, A. A. Diffey 468,302
Thill coupling, T. C. Greene 468,245
Tickets, checks, etc., device for holding and cutting, A. D. Joslin 467,936
Tire for velocipedes, wheel, R. Scott 467,984
Tire, pneumatic, W. R. Foster 468,196
Tobacco box clamp, W. P. Watt 468,272
Toy, spinning, F. W. L. Boldeck 468,233
Torpedo placer, S. D. Edgar 467,926
Toy, R. B. Monroe 468,047
Toy gun, spring, P. W. Pratt 468,089
Toy, magnetic, G. A. Goodson 468,274
Tramway, aerial, Prunetti & Avignone 468,208
Trolley, conduit electric, M. Wheless 468,166
Trolley wire hanger, C. T. Lee 467,940
Trombone, A. Mille 468,025
Trombone, slide, P. Robinson 468,116
Truck and wire stretcher, combined, M. Schmitz 468,182
Truck, vehicle, D. L. Barnes 468,146
Trucks, side bearing for car, M. V. Mullen 468,057
Turfing implement, H. T. Shipley 468,288
Turning, engraving, or planing tools, means for moving and guiding, G. M. Guerrant 468,283
Typewriter case, G. F. Stillman 468,103
Typewriting machine, D. C. Stover 468,139
Valve, F. J. Ferrell 468,242
Valve, D. R. McKim 468,029
Valve, G. F. Pottle 468,305
Valve, C. E. Van Auken 468,143
Valve device and vessel support, combined, J. A. Henry 468,041
Valve for compound steam engines, J. C. Hobart 467,933
Valve gate, F. H. Richards 467,955
Valve operating device for elevators, W. H. Hultgren 468,044
Vehicle seat, shifting, P. J. Hanley 468,275
Vehicle spring, E. H. Booth 468,234
Vehicle, two-wheeled delivery, M. B. Boone 467,912
Veneer cutting machine, W. Schrader 468,307
Ventilating curtain fixture, J. Q. A. Sand 468,286
Vessels, draught indicator for, R. C. Pringle 467,996
Vise, hand, F. J. Tomek 468,000
Wagon, dumping, A. E. Lawrence 467,939
Wagon, dumping, Stenback & Erickson 467,959
Wainscoting, K. Dieterich 468,132
Washing machine, D. Davis 468,317
Washing machine, W. H. Mabee 468,070
Watch cases, perpetual calendar for, F. W. Roe 468,263
Watch, stem winding and setting, T. F. Sheridan 467,998
Water, etc., apparatus for heating, W. H. Wilbur 468,124
Water motor, L. Benecke 468,068
Weighing apparatus, C. W. Hunt 468,108
Welding machine, T. F. Rowland, Jr. 468,009
Whiffletree hook, N. F. Reed 468,019
Winding and setting mechanism, stem, R. E. Moreland 468,204
Windmill, F. C. Jacoby 467,976
Wire bending machine, G. Cooper 468,301
Wire tightener, J. L. Buckingham 468,189
Woven fabric, tufted, A. Bollentin 468,051
Wrench, P. G. Douglas 468,241
Wrench, M. Horrigan 468,177
Yarn winding machines, yarn cleaning and fly collecting device for, C. Hamig 468,055
Yeast or similar substances, apparatus for the production of, Jorgensen & Bergh 467,993

DESIGNS.

Cuspidor, E. Gerard 21,324
Glassware, ornamentation of, H. Siegel 21,333
Hat or cap, M. Neugass 21,325
Hosiery, F. Oliver 21,326
Sign, I. S. Richardson 21,336
Spoon, etc., O. Wettstein 21,334
Stove, gas, L. Kahn 21,332
Table cover, E. Poole ..... 21,327 to 21,329
Table cover or curtain, E. Poole 21,335
Tea or coffee pot, A. F. Jackson 21,331
Type, font of, G. F. Giesecke 21,330

TRADE MARKS.

Antiseptics and deodorants, fluid, O. A. Beckmann 20,665
Atomizers, J. E. Shaw 20,667
Boots and shoes, Wertheimer, Swarts & Co. 20,680
Canned oysters, fruits, and vegetables, H. J. McGrath 20,666
Chucks, Oneida Manufacturing Chuck Company 20,679
Cough tablets, J. Casani 20,676
Elastic endless sleeve bands, E. Ashworth 20,668
Gloves, kid and leather, Wertheimer & Co. 20,675
Lamps, Safety Car Heating and Lighting Company 20,678
Matches, E. Holmberg 20,662
Oats or oatmeal, rolled, H. R. Heath & Sons 20,669
Ointment, M. Wallace 20,671
Oranges, R. S. Conover 20,673
Polishing paste, powder, and cloths and soaps for metals, and jewelers' soaps, Pyn-ka Syndicate 20,674
Remedy for heart disease, rheumatism, and kindred ailments, C. Gardner 20,664
Scales, weighing, Jones of Binghamton 20,672
Shaft and pole couplings for vehicles, H. A. Luttgens 20,663
Trousers waistbands for, N. J. Schloss & Co. 20,677
Whisky, Meyer Brothers Drug Company 20,670

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print, issued since 1863, will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

ADAMANT WALL PLASTER
BEST PLASTERING MATERIAL KNOWN.
No experiment. Its success has been phenomenal.
Thirty factories in this and other countries.
ADAMANT MFG. CO., SYRACUSE, N. Y.

MEMORY. BY J. O. HIRSCHFELDER.
An interesting review of the qualities of the memory, and analysis of its operations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 806. Price 10 cents. To be had at this office and from all newsdealers.

Patent Foot Power Machinery
Complete Outfits.

Wood or Metal workers without steam power, can successfully compete with the large shops, by using our New LABOR SAVING Machinery, latest and most improved for practical shop use, also for Industrial Schools, Home Training, etc. Catalogue free.
Seneca Falls Mfg. Co.
695 Water Street, Seneca Falls, N. Y.

U. S. INFALLIBLE METAL POLISH.
IN PASTE, LIQUID OR POWDER.
Invariably gives unbounded satisfaction. Dealers and Agents always find them quick sellers.
G. WM. HOFFMAN, Manu'fr,
No. 69 E. Washington Street, Indianapolis, Indiana.

Improved Screw Cutting Foot and Power. **LATHES**
Drill Presses, Shapers, Band, Circular, and Scroll Saws. Machinists' Tools and Supplies. Lathes on trial.
☞ *Catalogue mailed on application.*
SEBASTIAN LATHE COMPANY,
44-46 Central Ave., Cincinnati, O.

FRET SAW or BRACKET WOODS
Planed Ready for Use. Books of Design.
☞ Send stamp for catalogue.
CABINET WOODS AND VENEERS.
THE E. D. ALBRO CO.,
Eastern Branch, 200 Lewis St., New York, U. S. A.
H. T. Bartlett, *Mg'r.* F. W. Honerkamp, *Ass't Mgr.*
Mills, Cincinnati, Ohio.

T. A. C. MARCH 1st to OCTOBER 1st. Sales of a patented specialty over two millions. Manufactured on royalty. Inventors, write us.
THE TUSCARORA ADVERTISING CO.,
COSHOCTON, O.

BRICK, TERRA COTTA AND TILE MACHINERY
CAPACITY 10,000 to 100,000 Per Day.


SEND FOR CATALOGUE.
Cutting Tables, Pug Mills, Clay Crushers, Dry Pans, Re-Presses, Winding Drums, Dump Cars, Drying Cars, Transfer Cars, Turn Tables, Elevators, Screens, Shafting, Pulleys, Belting, Etc.
THE FREY, SHECKLER CO. BUCYRUS, O.

BUSINESS END OF THE AMERICAN
Newspaper. By A. H. Siegfried. An interesting paper on the work of the publishers' department of a newspaper; circulation of American papers; methods of printing, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 795 and 796. Price 10 cents each. To be had at this office and from all newsdealers.

FOR SALE.—Dynamo, 8 lights, 16 c. p., with lamps, quite new. $60. Address A. Hill, Meadville, Penn.

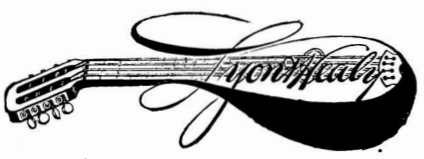

GUITARS
The Marquette. Quarter-sawed Sycamore $7.50
The Lakeside. Quarter-sawed Oak, - - $9.00
The Arion. Solid Mahogany, - - $11.00
The Conservatory. Solid Rosewood, - - $13.50

MANDOLINS
The Lakeside. Variegated Birds-Eye Maple $12
The Arion. Maple and Mahogany - - $15
The Arion. Same as preceding, inlaid, $20
The Conservatory. Solid Rosewood, - - - $20

Fully warranted and the best for the price the world affords. We manufacture all the component parts and are the largest makers on the globe. 100,000 of our instruments now in use. Sold by all leading dealers. Genuine have name burned on the inside. ☞ Take no other. ☜ Illustrated pamphlet mailed free.
LYON & HEALY, 156 to 164 State St., Chicago.

MAGIC LANTERNS
AND STEREOPTICONS FOR SCHOOLS & PUBLIC ENTERTAINMENTS
LANTERN SLIDES COLORED & UNCOLORED
SEND FOR CATALOGUE **QUEEN & CO.** PHILA. PA.

BYRKIT-HALL COMBINED SHEATHING AND LATH. BEST IN THE WORLD. GIVES PERFECT SATISFACTION.
The Best Foundation for Plaster
of any kind at same money.
Combines *strength, warmth, dryness, deafening, slow burning construction. No cracked walls.* Nails driven anywhere.
H. W. Jenkins, Williamsport, Pa.
Eastern Agency of the Byrkit-Hall Sheathing Lath Co

ELECTRIC POWER APPARATUS,
FOR EVERY VARIETY OF MECHANICAL WORK.
SAFE, SURE, RELIABLE.
ESTIMATES FURNISHED. SEND FOR CATALOGUES.
THOMSON-HOUSTON MOTOR CO.,
620 ATLANTIC AVENUE, BOSTON, MASS.

Did you ever receive a letter? You can receive our Roses the same way—by mail, postpaid. The Californian or the Pennsylvanian can alike enjoy the advantage of dealing direct at the Rose headquarters of the world. Success is universal with our
ROSES ON THEIR OWN ROOTS
We desire the acquaintance of every flower lover in America, and offer our *Rose Guide and Catalogue*, free, by way of introduction. It mirrors our immense stock, and gives a quarter of a century's special flower experience for the asking only. Other flowers also. No fancy prices. The *Guide* without price. Send your address.
THE DINGEE & CONARD CO.
Rose Growers & Seedsmen, WEST GROVE, PA.

VELOCITY OF ICE BOATS. A COLlection of interesting letters to the editor of the SCIENTIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory diagrams. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 214. Price 10 cents. To be had at this office and from all newsdealers.

Shepard's New $60 Screw-Cutting Foot Lathe

Foot and Power Lathes, Drill Presses, Scroll Saw Attachments, Chucks, Mandrels, Twist Drills, Dogs, Calipers, etc.
Lathes on trial. Lathes on payment.
Send for catalogue of Outfits for Amateurs or Artisans.
Address H. L. SHEPARD, AGENT,
141 West 2d Street, Cincinnati, Ohio.

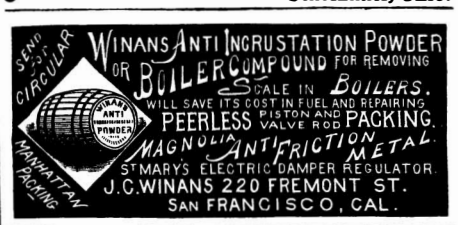
SEND FOR CIRCULAR
WINANS ANTI INCRUSTATION POWDER OR BOILER COMPOUND FOR REMOVING SCALE IN BOILERS.
WILL SAVE ITS COST IN FUEL AND REPAIRING.
PEERLESS PISTON AND VALVE ROD PACKING.
MAGNOLIA ANTI FRICTION METAL.
ST MARYS ELECTRIC DAMPER REGULATOR.
J.C. WINANS 220 FREMONT ST. SAN FRANCISCO, CAL.
MANHATTAN PACKING

EXPERT MODEL MAKING. Established 1867.
PETER SEYL, Prop. Chicago Model Works, Chicago, Ill. 179 Madison St. Write for catalogue of Model Supplies.

(Factory Space)
(To Let)
(With Power)
(For Large or Small Industries)
(On Canal, River and two Railroads)
(Write The Power Co., New Brunswick, N. J.)


$5 to $15 per day, at home, selling LIGHTNING PLATER and plating jewelry, watches tableware, &c. Plates the finest of jewelry good as new, on all kinds of metal with gold, silver or nickel. No experience. No capital. Every house has goods needing plating. Wholesale to agents $5. Write for circulars. H. E. DELNO & Co., Columbus, O.

WOOD WORKING MACHINERY
For Veneer, Fruit Package and Barrel Works. Handle, Spoke and Turning Factories.
I. E. Merritt Machinery Co., Lockport, N. Y.


SEND for our list of 19 Catalogs of Music and Musical Instruments.
W. STORY, 26 Central St., Boston, Mass

SMOKELESS GUNPOWDER.—AN INteresting article by Hudson Maxim on the manufacture and use of smokeless gunpowder, giving a sketch of its history and the methods of producing it. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 821. Price 10 cents. To be had at this office and from all newsdealers.

SMALL ELECTRIC MOTOR FOR AMateurs.—By C. D. Parkhurst. Description in detail of a small and easily made motor powerful enough to drive a ten or twelve inch brass fan and to give a good breeze. With 15 figures drawn to a scale. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 767. Price 10 cents. To be had at this office and from all newsdealers.

Hatch Chickens by Steam.
IMPROVED EXCELSIOR INCUBATOR

Will do it. Thousands in successful operation. *Simple, Perfect and Self-Regulating.* Lowest-priced first-class Hatcher made. Guaranteed to hatch a larger percentage of fertile eggs at less cost than any other.
Send 6c. for Illus. Catalog. GEO. H. STAHL, Quincy, Ill.

GENERAL AND EXPERIMENTAL MACHINE WORK. BEST FACILITIES IN CHICAGO. NATIONAL MACHINE WORKS. 35 S. CANAL ST. CHICAGO ILL.

RIFE'S AUTOMATIC HYDRAULIC ENGINE OR RAM

SUPPLYING WATER FOR Irrigation, Small Towns, Railroad Tanks, Factories, Steam Mills, Dairies, Country Residences, Stock Yards, etc. *Automatic, Efficient, Durable, and Inexpensive.* Send for fully illus. catalogue.
☞ *See illustrated notice in Sci. Am., p. 5, July 5, '90.*
Rife's Hydraulic Engine Mfg. Co., Roanoke, Va.


PORTER AUTOMATIC ENGINE. (CENTER CRANK) ECONOMY PERFECT REGULATION OF SPEED ABSENCE OF ALL PARTS REQUIRING FREQUENT ATTENTION
PORTER MFG. CO. LIMITED. SYRACUSE N.Y. BUILDERS OF AUTOMATIC AND PLAIN SLIDE VALVE ENGINES ALSO CONSTRUCTORS OF TANKS, STAND PIPES BOILERS AND STONE CRUSHERS SPECIFICATIONS SOLICITED ESTIMATES GIVEN

NOW READY!
A NEW AND VALUABLE BOOK.
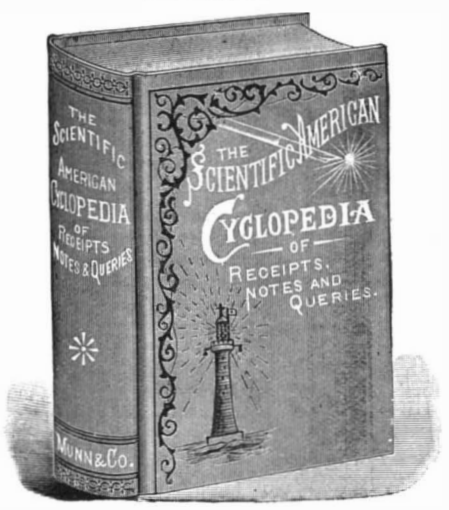

12,000 Receipts. 680 Pages. Price $5.

This splendid work contains a careful compilation of the most useful Receipts and Replies given in the Notes and Queries of correspondents as published in the **Scientific American** during the past fifty years; together with many valuable and important additions.

Over Twelve Thousand selected receipts are here collected; nearly every branch of the useful arts being represented. It is by far the most comprehensive volume of the kind ever placed before the public.

The work may be regarded as the product of the studies and practical experience of the ablest chemists and workers in all parts of the world; the information given being of the highest value, arranged and condensed in concise form convenient for ready use.

Almost every inquiry that can be thought of, relating to formulæ used in the various manufacturing industries, will here be found answered.

Instructions for working many different processes in the arts are given.

It is impossible within the limits of a prospectus to give more than an outline of a few features of so extensive a work.

Under the head of Paper we have nearly 250 receipts, embracing how to make papier maché; how to make paper water proof and fire proof; how to make sandpaper, emery paper, tracing paper, transfer paper, carbon paper, parchment paper, colored papers, razor strop paper, paper for doing up cutlery, silverware; how to make luminous paper, photograph papers, etc.

Under the head of Inks we have nearly 450 receipts, including the finest and best writing inks of all colors, drawing inks, luminous inks, invisible inks, gold, silver and bronze inks, white inks; directions for removal of inks; restoration of faded inks, etc.

Under the head of Alloys over 500 receipts are given, covering a vast amount of valuable information.

Of Cements we have some 600 receipts, which include almost every known adhesive preparation, and the modes of use.

How to make Rubber Stamps forms the subject of a most valuable practical article, in which the complete process is described in such clear and explicit terms that any intelligent person may readily learn the art.

For Lacquers there are 120 receipts; Electro-Metallurgy, 125 receipts; Bronzing, 127 receipts; Photography and Microscopy are represented by 600 receipts.

Under the head of Etching there are 55 receipts, embracing practical directions for the production of engravings and printing plates of drawings.

Paints, Pigments and Varnishes furnish over 800 receipts, and include everything worth knowing on those subjects.

Under the head of Cleansing over 500 recipes are given, the scope being very broad, embracing the removal of spots and stains from all sorts of objects and materials, bleaching of fabrics, cleaning furniture, clothing, glass, leather, metals, and the restoration and preservation of all kinds of objects and materials.

In Cosmetics and Perfumery some 500 receipts are given.

Soaps have nearly 300 receipts.

Those who are engaged in any branch of industry probably will find in this book much that is of practical value in their respective callings.

Those who are in search of independent business or employment, relating to the home manufacture of sample articles, will find in it hundreds of most excellent suggestions.

MUNN & CO., Publishers,
SCIENTIFIC AMERICAN OFFICE,
361 Broadway, New York.

SEWING MACHINE MOTOR FOR AMAteurs.—By C. D. Parkhurst. Description of a very simple and effective motor, with laminated armature, of sufficient power to actuate a sewing machine. With 11 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 759. Price 10 cents. To be had at this office and from all newsdealers.

AGENTS YOU CAN MAKE **$100** PER MONTH Selling the

It is a combination Bin, Sifter, Pan and Scoop. Holds a full sack of flour and sifts it the finest you ever saw. Every family wants one. Write quick for circulars and special terms. Manufactured only by SHERMAN & BUTLER, 26-28 W. Lake St. B 180 Chicago, Ill.

A Great Advertising Medium.
The Architects and Builders Edition of the Scientific American.
(Established 1885.)

This superb architectural work has by far the largest circulation of any periodical of its class. It goes directly *into the hands of those who have the Ordering of the great bulk of Building Materials and Appliances*, namely, the Architects, Builders, Constructing and Sanitary Engineers, Contractors, and House Owners.

The Building Edition of the SCIENTIFIC AMERICAN is *unquestionably* the very best advertising medium for manufacturers and dealers in Building Materials, Carpenters' Tools, Woodworking Machinery, Heating, Ventilating, Plumbing and Sanitary Appliances, Roofing, Architectural Wood and Metal Work, Builders' Hardware, Doors, Sash, Blinds, Paints, and in fact all goods which enter into or are used in the construction and maintenance of Buildings or works of any kind.

The rates for advertising are moderate. For terms address MUNN & Co. Publishers, 361 Broadway, N. Y.

© 1892 SCIENTIFIC AMERICAN, INC.

A New and Valuable American Book for Prospectors and Miners.

JUST READY.

The Prospector's Field Book and Guide

In the Search for and the Easy Determination of Ores and other Useful Minerals. By Prof. H. S. Osborn, LL.D., author of "A Practical Manual of Minerals, Mines, and Mining." Illustrated by 44 engravings. 12mo, 175 pages.
Price $1.50, by mail, free of postage to any address in the world.

CONTENTS.—Chapter I. Preparatory Instruction. II. Crystallography. III. Surveying. IV. Analyses of Ores, Wet Method, Dry Assay of Ores. V. Special Mineralogy, Gold. VI. Platinum, etc. Silver. VII. Copper, and How Measured by Ores. VIII. Lead and Tin. IX. Zinc, Iron. X. Mercury, Bismuth, Nickel, and Cobalt. XI. Aluminum, Antimony. Manganese, and other Minerals. XII. Precious Stones. Appendix, Correction of Weights and Measures, Prospector's Pointers, Index.

BY THE SAME AUTHOR.

Recently Published.

A PRACTICAL MANUAL OF MINERALS, MINES, AND MINING.

Comprising suggestions as to the localities and associations of all the Useful Minerals; full descriptions of the most effective methods of both the qualitative and quantitative analyses of each of these minerals, and hints upon the various operations of mining, including architecture and construction. By Prof. H. S. Osborn, LL.D. Illustrated by 171 engravings. 8vo. 367 pages.
Price $4.50, by mail, free of postage to any address in the world.

☞ *Descriptive circulars giving the full tables of contents of the above books sent free to any one who will send his address.*

☞ *A New List of Leading Books on Metal Mining, Metallurgy, Mineralogy, Assaying, Chemical Analysis, Geology, etc., sent free to any one, in any part of the world, who will send his address.*

☞ *Our New and Revised Catalogue of Practical and Scientific Books, 88 pages, 8vo, and our other Catalogues, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish us with his address.*

HENRY CAREY BAIRD & CO.
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

CUMMER'S DRYER, PULVERIZER & CALCINER.
CLAY FROM BANK, DRIED @ 5 CTS. PER TON. ALSO VERY WET & PASTY MATERIALS.—PHOSPHATE ROCK, GYPSUM &c.
CALCINED BY NEW CHEAP PROCESS. PULVERIZER FOR FINE GRINDING OF PAINTS, PHOSPHATE ROCK CEMENTS &c. — LARGE CAPACITY, VERY DURABLE.
SEPARATOR HANDLES TO 80 MESH & FINER. 10 TO 20 TONS PER HOUR WITH 1-H.P.
MANFC. FOR U.S. EXCLUSIVELY BY FRONTIER IRON WORKS, DETROIT, MICH. | SOLD EXCLUSIVELY BY F. D. CUMMER & SON DETROIT, MICH.

ROPER'S
PRACTICAL
Handy Books.

BY STEPHEN ROPER, Engineer.

TITLES AND PRICES.

A Catechism of High Pressure or Non-Condensing Steam Engines. Revised and enlarged. **$2.00**

Engineer's Handy Book. Containing a full Explanation of the Steam Engine Indicator, and its Use and Advantages to Engineers and Steam Users, with Formulæ for Estimating the Power of all Classes of Steam Engines. 690 pages..... **$3.50**

Hand-Book of Land and Marine Engines. Eighth edition. Revised, enlarged, and improved. Illustrated..... **$3.50**

Hand-Book of Modern Steam Fire Engines, including the Running, Care, and Management of Steam Fire Engines and Fire Pumps..... **$3.50**

Hand-Book of the Locomotive. Thirteenth edition, revised. Illustrated..... **$2.50**

Instructions and Suggestions for Engineers and Firemen who wish to procure a License, Certificate or Permit to take charge of any Class of Steam Engines or Boilers, Stationary, Locomotive, and Marine.. **$2.00**

Questions and Answers for Engineers. Fifth edition..... **$3.00**

The Steam Boiler: Its Care and Management, with Instructions for Increasing the Efficiency and Economy and Insuring the Durability and Longevity of all Classes of Steam Boilers, Stationary, Locomotive, Marine, and Portable. With Hints and Suggestions and Advice to Engineers, Firemen, and Owners of Steam Boilers..... **$2.00**

The Young Engineer's Own Book. Containing an Explanation of the Principles and Theories on which the Steam Engine as a Prime Mover is Based. With 106 illustrations..... **$3.00**

Use and Abuse of the Steam Boiler. Tenth edition, revised..... **$2.00**

☞ *Descriptive Catalogues mailed free to any address.*

These books embrace all branches of Steam Engineering. They are the only books of the kind ever published in this country, and they are so plain that any engineer or fireman can easily understand them.

FOR SALE BY ALL BOOKSELLERS.

EDWARD MEEKS,
PUBLISHER,
No. 1012 Walnut Street, Philadelphia, Pa.

THE MODERN ICE YACHT. — BY Geo. W. Polk. A new and valuable paper, containing full practical directions and specifications for the construction of the fastest and best kinds of Ice Yachts of the latest, most approved forms. Illustrated with engravings drawn to scale, showing the form, position, and arrangement of all the parts. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **624.** Price 10 cents. To be had at this office and of all newsdealers.

PELTON WATER MOTOR.

Unequaled for all light running machinery. Warranted to develop a given amount of power with one-half the water required by any other. Evidence of unquestioned superiority afforded on application. ☞ Send for Circular. Address,
The Pelton Water Wheel Co.,
121A Main Street, San Francisco, Cal., or 2352 Central Building, Liberty & West Sts., N. Y.

THE INTERNATIONAL CYCLOPÆDIA
Revised Edition of 1892. Just Out.

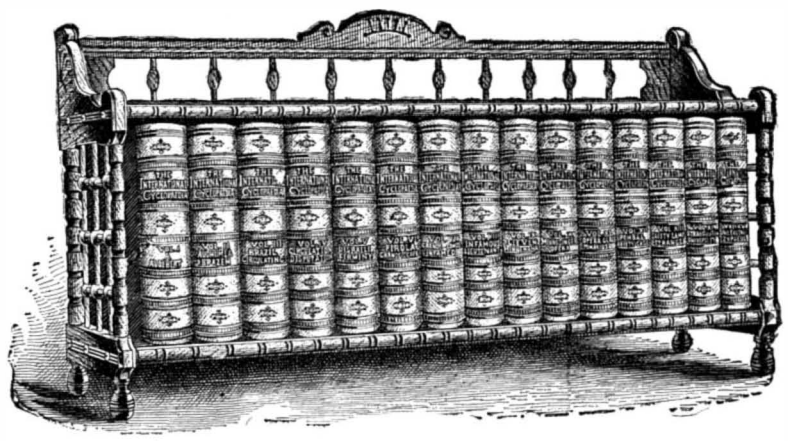

The BEST READY REFERENCE CYCLOPÆDIA in the ENGLISH LANGUAGE

Contains **Latest Census of all Countries, New State Maps** made for this edition; **all Maps Revised to November, 1891; New Colored Plates;** thousands of **Cross-References** connecting collateral topics; **valuable Bibliography;** latest statistics and progress in contemporaneous **History, Politics, Geography, Theology, Biography, Education,** etc. Circulars describing special features mailed free.

SOLD FOR CASH OR ON EASY PAYMENTS. AGENTS WANTED.

DODD, MEAD & COMPANY, SUBSCRIPTION DEPARTMENT, **753 & 755 BROADWAY, NEW YORK.**

STEEL TYPE FOR TYPEWRITERS

Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc.
Model and Experimental Work
Small Machinery, Novelties, etc., manufactured by special contract.
New York Stencil Wks. 100 Nassau St., N.Y

EYESIGHT: ITS CARE DURING INfancy and Youth. A valuable article by L. W. Fox, M.D. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **822.** Price 10 cents. To be had at this office and from all newsdealers.

OIL WELL SUPPLY CO.
91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for
ARTESIAN WELLS
for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

ARTESIAN

Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1,000 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE ARTESIAN & OIL WELL SUPPLY CO., 80 BEAVER STREET, NEW YORK.

ICE HOUSE AND REFRIGERATOR. Directions and Dimensions for Construction, with one illustration of cold house for preserving fruit from season to season. The air is kept dry and pure throughout the year at a temperature of from 34° to 36°. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **116.** Price 10 cents. To be had at this office and from all newsdealers.

THE PENNA. DIAMOND DRILL & MFG. CO.
BIRDSBORO, PA., Builders of High Class Steam Engines, Diamond Drills, Power and Hand Cranes, and General Machinery.

PURE TEMPERED COPPER THE SAFEST, MOST DURABLE & ECONOMICAL METAL EVER OFFERED FOR VARIOUS MECHANICAL USES. HIGHEST ANTI-FRICTIONAL QUALITIES. INDISPENSIBLE FOR ELECTRICAL WORK. EUREKA TEMPERED COPPER CO. NORTH EAST, PA.

HARRISON CONVEYOR!
For Handling **Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.**
Send for Circulars. | **BORDEN, SELLECK & CO.,** {Sole Manu'fers,} **Chicago, Ill.**



After being on the Market Five Years
The "ACME" Still Leads!
Sizes One, Two, Three, and Four Horse Power. Arranged for either NATURAL GAS or Kerosene Oil fire, as ordered. No extra insurance required on account of the oil fire. Send for catalogue giving full particulars and prices.
ROCHESTER MACHINE TOOL WORKS. Brown's Race, ROCHESTER, N. Y.

CLARK'S
WOOL WASHERS,
WARP DYEING AND SIZING MACHINES,
PATENT RUBBER COVERED SQUEEZE ROLLS,
POWER WRINGERS FOR HOSIERY AND YARN DYEING,
DRYING AND VENTILATING FANS,
WOOL AND COTTON DRYERS, Etc.
Catalogues free.
GEO. P. CLARK
Box L. Windsor Locks, Conn.



WOODEN TANKS FOR RAILROADS, WATER WORKS, MILLS, FARMS &c.
LARGE WATER TANKS. COMPLETE STOCK OF CYPRESS LUMBER.
PLANS & ZA SPECIALTY.
SPECIFICATIONS FURNISHED FOR FOUNDATIONS & TOWERS.
W. E. CALDWELL & Co
No 217 E. MAIN ST. LOUISVILLE KY.

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

$10.00 to $50.00 per night. A light and profitable business. **Magic Lanterns and Views** of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, etc.
L. MANASSE, 88 Madison Street, Chicago, Ill.

MOSS ENGRAVING CO.
535 PEARL ST. NEW YORK.
Catalogue and FINE PRESS WORK A SPECIALTY.
OUR PROCESSES MOSS TYPE PHOTO ENGRAVING. ZINC ETCHING

Our new General Circular "S. A.," showing specimens of all our work, is now ready. Send stamp and particulars for estimates.

A NEW CATALOGUE OF VALUABLE PAPERS

Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent *free of charge* to any address.
MUNN & CO., 361 Broadway, New York.

VOLNEY W. MASON & CO.,
FRICTION PULLEYS CLUTCHES and ELEVATORS
PROVIDENCE, R. I.



Van Duzen's Pat. Loose Pulley Oiler
HAS Highest Indorsements, Enviable Reputation, Scientific Pedigree.
A two years' test by conservative manufacturers of national reputation has shown it to be the *only perfect Lubricator for Loose Pulleys* in use. Prices very reasonable. Send for our "Catalogue Number 55."
VAN DUZEN & TIFT, Cincinnati, O

Machinists' Tools of every description, drop forged from bar steel, correct in design and unequaled in finish.
THE BILLINGS & SPENCER COMPANY,
HARTFORD, CONN.

STEVENS PATENT
IDEAL PENCIL DIVIDERS

No. 69. Sent by mail, postpaid.
3 inch only..... $1.75
Our goods excel, for neatness and fine finish, any other make.
Ideal and Leader Spring Calipers and Dividers, Ideal Surface Gauges, Depth Gauges, and Fine Machinists' Tools.
☞ *Illustrated catalogue free to all.*
J. STEVENS ARMS & TOOL CO.,
P. O. Box 280, Chicopee Falls, Mass.

STORY OF THE UNIVERSE—BY DR. William Huggins, D.C.L., L.L.D. Presidential address before the British Association, Cardiff, 1891. A review of the newer methods of astronomical research which have led to the remarkable discoveries that have been made within the last thirty years. With portrait of Dr. Huggins. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **819.** Price 10 cents. To be had at this office and from all newsdealers.

BARNES'
New Friction Disk Drill.
FOR LIGHT WORK.

Has these Great Advantages:
The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for catalogue.
W. F. & JNO. BARNES CO.,
1999 Ruby St., - Rockford, Ill.

CELLULOID ZAPON Co. MANUFACTURERS OF **CELLULOID LACQUERS** AND VARNISHES FOR METAL AND WOOD
41 BARCLAY ST. NEW YORK.
GUM LACQUERS—BRILLIANT AND DEAD BLACKS—SHELLACS &C.
SOLE LICENSEES OF THE CELLULOID COMPANY

A high class, beautifully illustrated monthly magazine like THE CENTURY and HARPER'S, but devoted exclusively to industrial affairs. It covers the entire field of industry, and, besides nine special departments and a monthly index to all that is valuable in technical literature, each number contains ten leading articles by distinguished authorities upon topics that are uppermost in public interest. "The Drexel Institute, Philadelphia," by Chauncey M. Depew, is the leading paper in the current (February) number, and this is followed by the first of an elaborately illustrated and exceedingly interesting series entitled "The Gold Fields of South Africa," by Gustave Hallé, E.M. "The Past Year in Mining," by Albert Williams, Jr., E.M., and "Railroad Building in 1891," by Thos. L. Greene, are two papers of great interest and paramount value just now; and others are "American Supremacy in Applied Mechanics," by Prof. Coleman Sellers, E.D., "The Gravity System of Water Supply," "Who is an Engineer?" "Suggestions in Aerial Navigation," and "The Wind as a Factor in Geology."
"Edited with marked ability."—*Boston Herald.*
"Studded with ideas of practical value."—*Norfolk Virginian.*
"The contributors are men of the highest rank."—*St. Louis Republic.*
"Unquestionably the most elaborately illustrated engineering journal that has yet appeared on either side of the Atlantic."—*Mechanical World, London.*
25 cents; $3.00 a year. News-stands, or by mail.
Send 10 cents for a sample copy. Mention this paper.
THE Engineering Magazine CO. World Building, New York, U.S.A.

HARPER'S PERIODICALS

HARPER'S MAGAZINE, One Year	$4.00
HARPER'S WEEKLY, One Year	4.00
HARPER'S BAZAR, One Year	4.00
HARPER'S YOUNG PEOPLE, One Year	2.00

☞ *Postage free to all subscribers in the United States, Canada, and Mexico.*

The volumes of the WEEKLY and BAZAR begin with the first numbers for January, the volumes of the YOUNG PEOPLE with the first number for November, and the volumes of the MAGAZINE with the numbers for June and December of each year.

Booksellers and Postmasters usually receive Subscriptions. Subscriptions sent direct to the publishers should be accompanied by Post Office Money Order or Draft. When no time is specified, subscriptions will begin with the current Number.

The MAGAZINE is an overflowing store of good literature and exquisite art—a delightful production deserving all the fame and all the material success which have been won by it. The WEEKLY is a rarely illustrated chronicle of the year's events. There is no end of pleasure and profit in its pages. . . . The BAZAR is a repository of fashion, and a gallery of some of the finest engravings of the time. . . . The YOUNG PEOPLE is at reasure-house, fascinating to every boy and girl as well as to plenty of persons older. A remarkable and valuable, an instructive and delightful line of publications, indeed.—*N. Y. Sun.*

Address
HARPER & BROTHERS,
NEW YORK.

CHUCKS. Catalogue No. 12, just issued with over 40 new illustrations sent free. Address,
The Cushman Chuck Co., Hartford, Conn.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
THOMAS DEVLIN & CO. FINE TINNING, JAPANNING AND FINISHING.
LEHIGH AVE. & AMERICAN ST. PHILA.

INVENTIONS Practically **DEVELOPED**
Drawings, Pattern Making, Experimental and Fine Machine Work of all kinds. MILLIKEN & D'AMOUR, 151-153 Cedar Street, near West Street, New York.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **59.** Price 10 cents. To be had at this office and of all newsdealers.

SPECIAL OFFER
CINCINNATUS REGULAR PRICE $115. OUR PRICE $85.
THE DUKE REGULAR PRICE $60. OUR PRICE $40.
THE HUMMER REGULAR PRICE $35. OUR PRICE $27.
J. E. POORMAN 292 RACE ST. CINCINNATI, OHIO.

GATES ROCK & ORE BREAKER

Capacity up to 200 tons per hour.
Has produced more ballast, road metal, and broken more ore than all other Breakers combined.
Builders of High Grade Mining Machinery. Send for Catalogues.
GATES IRON WORKS,
50 C So. Clinton St., Chicago
136 C, Liberty Street, New York,
215 C, Franklin St., Boston, Mass

DEAFNESS & HEAD NOISES CURED by Peck's Invisible Tubular Ear Cushions. Whispers heard. Successful when all remedies fail. Sold only by F. Hiscox, 853 B'way, N.Y. Write for book of proofs **FREE**

© 1892 SCIENTIFIC AMERICAN, INC.

Advertisements.

Inside Page, each insertion - - - 75 cents a line
Back Page, each insertion - - - - $1.00 a line

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

STAR HACK SAWS.

All who use Star Hack Saws in hand frames know their value. When run with power, that value is increased at least fivefold. Price of Power Machine, $25. It cuts up to five inches. In many shops it saves its cost in 25 days. They are fast coming into use, and never fail to satisfy.

MILLERS FALLS CO.,
93 READE STREET, NEW YORK.

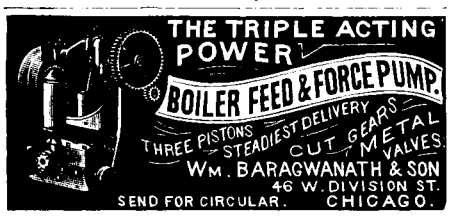

THE AMERICAN BELL TELEPHONE CO.

95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

PATENT JACKET KETTLES

Plain or Porcelain Lined.
Tested to 100 lb. pressure. Send for Lists.
BARROWS-SAVERY CO.,
S. Front & Reed Streets, Philadelphia, Pa.

H.W. JOHNS' ASBESTOS STEAM PACKING

Boiler Coverings, Millboard, Roofing, Building Felt, Liquid Paints, Etc.
DESCRIPTIVE PRICE LIST AND SAMPLES SENT FREE.
H. W. JOHNS MFG. CO., 87 Maiden Lane, N. Y.

LEARN WATCHMAKING of W. F. A. Woodcock, Winona, Minn. Write for terms

PATENTS!

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty-five years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases. Hints on the sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing Patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents.
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

King of Kameras.

The new model Folding Kodak, with glass plate attachment, Asbury Barker frictionless shutter. Greatest range of automatic exposure ever attained. No sticking on slow speeds. Accurate, reliable.

Best combined tripod and hand camera ever made. Best workmanship. Best Finish. Send for circulars.

THE EASTMAN COMPANY,
ROCHESTER, N. Y.

DEFIANCE MACHINE WORKS,
DEFIANCE, OHIO, U. S. A.,
BUILDERS OF
WOOD-WORKING MACHINERY
FOR
Hub, Spoke, Wheel, Wagon, Carriage Bending,



Patent Wheel Boxing Machine.

Hoop, Neck-Yoke, Single-Tree, AND Handle Factories.

Complete Outfits.

Send for Catalogue.

FREE ON APPLICATION.
THE BABCOCK & WILCOX CO.
WATER TUBE
30 CORTLANDT ST. N.Y.
107 HOPE ST. GLASGOW, SCOTLAND.
STEAM BOILERS
MANUFACTORIES IN UNITED STATES, SCOTLAND, FRANCE, GERMANY & AUSTRIA.

Awarded the Grand Prize at late Paris Exposition.

THE REMINGTON STANDARD TYPEWRITER

Is to-day, as it has ever been the leading Typewriter.

Carefully tested improvements are constantly added to this famous machine.



Send for Illustrated Catalogue.

TRY OUR PARAGON BRAND OF TYPEWRITER RIBBONS.

Wyckoff, Seamans & Benedict,
327 Broadway, New York.

COMPTOMETER, TRADE MARK

Figures any and all kinds of examples. Operated by keys. Saves 60 per cent of time. Insures accuracy, and relieves all mental strain. Why don't you get one?

Send for circular.

FELT & TARRANT MFG. CO.
52-56 Illinois St., Chicago.

"Improvement the order of the age."

THE SMITH PREMIER TYPEWRITER

Important Improvements.
All the Essential Features greatly perfected.
The Most Durable in Alignment.
Easiest Running and Most Silent.
All type cleaned in 10 seconds without soiling the hands.
The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.
☞ Send for Catalogue.

The Sebastian-May Co.
Improved Screw Cutting
Foot & Power **LATHES**

Drill Presses, Chucks, Drills, Dogs, and Machinists' and Amateurs' Outfits. *Lathes on trial.* Catalogues mailed on application.
165 to 167 Highland Ave.,
SIDNEY, OHIO.

DO U SEEK POWER?
We can supply it with the
Motor of the 19th Century



¾ to 70 horse power.
Cost about one cent an hour to each indicated horse power.
"*In worth, not size, my value lies.*"
What others think of me is stated in catalogue.
CHARTER GAS ENGINE CO.
P. O. Box 148, Sterling, Ill.

VAN DUZEN'S Steam JET PUMP



PUMPS ANY KIND OF LIQUID.
Does not clog, freeze or get out of order. Always ready. All brass. Every Pump Guaranteed. 10 sizes. Capacity 100 to 10,000 gallons per hour. Prices $7 and upwards. For full information write to
The VAN DUZEN & TIFT CO.
(PUMP DEPARTMENT)
CINCINNATI, O.

NICKEL-IN-THE-SLOT MACHINES.

By W. L. Aughimbaugh. An interesting description of the various coin-controlled apparatus now so common in public places; with an explanation of their mechanism. Illustrated with 14 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 797. Price 10 cents. To be had at this office and from all newsdealers.

ELECTRO VAPOR ENGINE.
GAS OR GASOLINE FOR FUEL.
NO BOILER. NO FIRE. NO DANGER. NO ENGINEER.



Engine operated by spark from small battery.
You turn the Switch, Engine does the rest.
Regan Vapor Stationary Engines, 1 to 12 H. P.
Regan Vapor Pumping Engines, 350 to 10,000 gallons capacity.

—MANUFACTURED BY—
THOMAS KANE & CO.,
CHICAGO, ILL.
☞ *Send stamp for catalogue "V."*

LUNKENHEIMER'S PATENTED LOOSE PULLEY OILERS,

backed by practical tests, are acknowledged the simplest, most economical and efficient oilers for loose pulleys. They are provided with a set screw to regulate the feed, and guaranteed to give satisfaction. A trial will prove their superiority. None genuine unless provided with a set screw. Made only by The Lunkenheimer Brass Mfg. Co., Cincinnati, O., U. S. A., and supplied by dealers. Send for catalogue and discounts of improved steam specialties. ☞ *Please mention this paper.*

EDISON GENERAL ELECTRIC CO.

INCANDESCENT AND ARC LIGHT PLANTS.
Stationary and Railway Motors.—Lamps.—Cables.—Safety Devices.

DISTRICT OFFICES.

Canadian.....Edison Building, 77 Bay St., Toronto, Can.
Central.....173 & 175 Adams St., Chicago, Ill.
Eastern.....Edison Building, Broad St., New York.
New England.....25 Otis St., Boston, Mass.
Pacific Coast..Edison B'lding, 112 Bush St., S. Fran., Cal.
Pacific Northwest...Fleischner Building, Portland, Ore.
Rocky Mountain.....Masonic Building, Denver, Colo.
Mexican and South American Department.....Edison Building, Broad Street, New York.
European Office.....34 Victoria Street, Westminster, London, S.W., England.

THE GRAVES ELEVATORS.
PASSENGER & FREIGHT
L. S. GRAVES & SON ROCHESTER N.Y. NEW YORK, BOSTON, ST LOUIS, DETROIT.



"OTTO"
GAS AND GASOLINE **ENGINES,**
1-3 to 100 horse power
Can be used in cities or in country independent of gas works or gas machines.
No Boiler.
No Danger.
No Engineer.
OVER **33,000 SOLD.**
OTTO GAS ENGINE WORKS, PHILADELPHIA.

BALL AUTOMATIC CUT OFF ENGINE
MADE ONLY BY
THE BALL ENGINE CO.
ERIE, PA.

THE
SCIENTIFIC AMERICAN

ESTABLISHED 1846.
The Most Popular Scientific Paper in the World

Only $3.00 a Year, Including Postage.
Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO., 361 Broadway, New York.

THE
Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Single copies, 10 cents. Address and remit by postal order, express money order, or check,

MUNN & CO., 361 Broadway, New York,
Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid Magazine of Architecture, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to

MUNN & CO., Publishers,
361 Broadway, New York.

GEAR CUTTING
Leland, Faulconer & Norton Co., Detroit, Mich

PRINTING INKS

The SCIENTIFIC AMERICAN is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York

Investment vs. Speculation.
"Dividend Paying Investments."

It will pay you if you have any money to invest either large or small sums, to send for pamphlet "Investment *vs.* Speculation." Free to any one mentioning this paper.
—**Taylor & Rathvon,** Boston, New York or Denver.

© 1892 SCIENTIFIC AMERICAN, INC.